- Note Ask an authorised Daikin dealer to install Daikin products. Do not try to install the product yourself or get it installed by any unauthorised dealer. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion. Warranty of the product shall be void if not installed by an authorised Daikin dealer.
 - Use only those parts and accessories supplied or specified by Daikin. Ask authorised Daikin dealer for any repair or component. Warranty of the product / component shall be void if non-specified spares are used or repaired by a non Daikin dealer.
 - Please ensure to install ELCB (Earth Leakage Circuit Breaker) for outdoor units to prevent ground fault effects.
 - Read the user's manual carefully before using the product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

For any enquiry, either call the numbers mentioned below or contact your nearest Daikin dealer.

Cautions on product corrosion

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced. 2. If the outdoor unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the outdoor unit close to the sea shore, contact your local distributor.





About ISO 9001

ISO 9001 is a plant certification system defined by the International Organization for Standardization (ISO) relating to quality assurance. ISO 9001 certification covers quality assurance aspects related to the "design, development, manufacture, installation, and supplementary service" of



About ISO 14001

ISO 14001 is the standard defined by the International Organization for Standardizatio (ISO) relating to environmental management systems. Our group has been acknowledged by an internationally accredited compliance on internationally accreatied compilance organisation as having an appropriate progra of environmental protection procedures and tivities to meet the requirements of ISO 14001

DAIKIN AIRCONDITIONING INDIA PVT. LTD.

12th Floor, Building No. 9, Tower A, DLF Cyber City, DLF Phase III, Gurgaon - 122 002, Haryana, India. Tel.: 0124-4555444, Fax.: 0124-4555333, e-mail: ho@daikinindia.com

products manufactured at the plan



CUSTOMER SUPPORT AT: 011-40319300, 1860-180-3900 cs@daikinindia.com

SALES & SERVICE OFFICES

Ahmedabad - Tel: 079-26583013-14 Bengaluru - Tel: 080-25590452/54 Chandigarh - Tel: 0172-4947200-230 Chennai - Tel: 044-40807676 Delhi NCR - Tel: 011-43834400/4500 Hyderabad - Tel: 040-49134283

Jaipur - Tel: 0141-2218903 Kolkata - Tel: 033-23574259/61 Lucknow - Tel: 0522-2787307/340 Mumbai - Tel: 022-30926666 Pune - Tel: 020-25560300

To know more, give a missed call or SMS: <DAIKIN> to 9210188999


Visit us at: www.daikinindia.com Follow us on:

f www.facebook.com/daikinindia www.twitter.com/daikinindia

The specifications, designs, and information in this brochure are subject to change without notice.



WORLD'S LEADING AIR CONDITIONING COMPANY FROM JAPAN

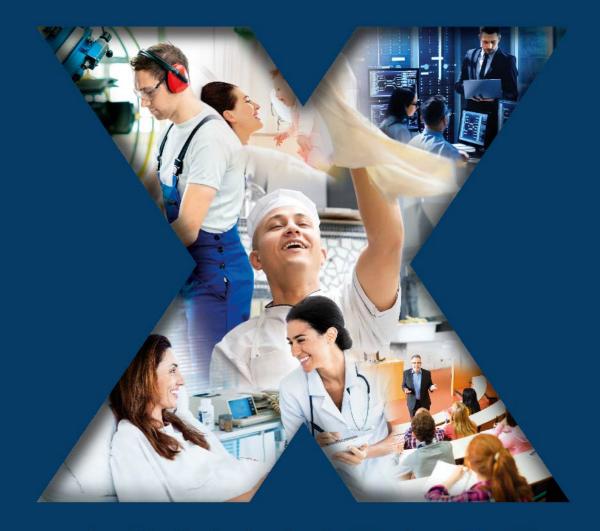

ADVANTAGE

X' TENSIVE

POWER SAVINGS TECHNOLOGY





INDEX

SALIENT FEATURES	6
OUTDOOR UNIT LINE-UP	19
INDOOR UNIT LINE-UP	20
SPECIFICATIONS	45
OUTDOOR UNIT COMBINATIONS	66
OPTION LIST	68
CONTROL SYSTEMS	72
AIR TREATMENT EQUIPMENT LINE-UP	96



Equipped with Advanced Technology, that results in high energy efficiency. This technological innovation gives end user the advantage of better comfort and works further towards creating a sustainable environment.



DAIKIN The world leader in air conditioning

At Daikin, we are a leading innovator and provider of advanced, high-quality air conditioning solutions for residential, commercial and industrial applications.

As world's leading air conditioning company, we are committed to deliver air conditioning solutions that enhance the quality of life all around the world.


Established in 1924, Daikin Industries Ltd., is a diverse multinational company, active in air conditioning, chemicals and oil hydraulics. With headquarters at Osaka, Japan, our Daikin family has more than 67,000 members, working across 80 production base and 208 consolidated subsidiaries worldwide.

As the world's sole manufacturer that develops a long line of products from refrigerants to air conditioners, we advocate comfortable living on the strength of advanced technologies.

We are present in USA, Europe and Russia, The Middle East, Africa, Asia, Oceania and Middle-South America. We aim to serve our customers in each of these markets by providing optimal air conditioning solutions.





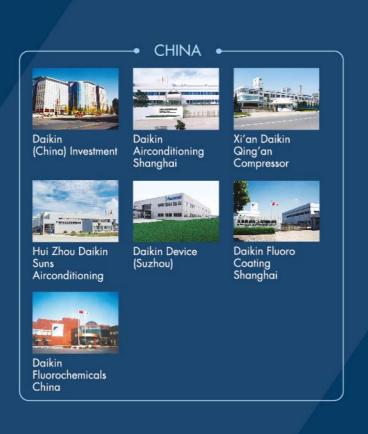

2





5

Exploring new R&D frontiers

At Daikin, we are creating value through innovative technologies. As a global industry front-runner, we are carrying out research and development on the world's most advanced air conditioning technology.

Our strong R&D edge has helped us create futuristic products that enrich people's lives. As symbolised by the VRV, Daikin has put forth a multitude of products and varied technology that have always been and continue to be, at the forefront of innovation.

To be able to offer such products and services that delight and astound our customers, we have constructed an advanced R&D architecture.






Formation of a three-division system of research, IT and development to support our superior products.


To create more advanced functions and new value, we have instituted specialised R&D divisions: the 'Environmental Technology Research Laboratory' and the 'Solution Product Development Centre'. In combination with the Product Development Group, each of the three divisions work in close co-operation to precisely ascertain the customers' needs and to enable commercialisation of products, incorporating advanced technology that take the lead over our competitors.



Accelerating globalisation of our air conditioning business and varied needs of customers across geographies are increasing our research challenges. We have established a research laboratory devoted to the two fields of 'air conditioning' and 'the environment'. With our mission to promote energy savings in air conditioners, we are engaged in R&D on cutting-edge technologies. Our aim is to create futuristic products from fundamental research on motor inverters and other areas to support individual product development.


Going forward, we will elevate our technology edge to achieve further business expansion globally.

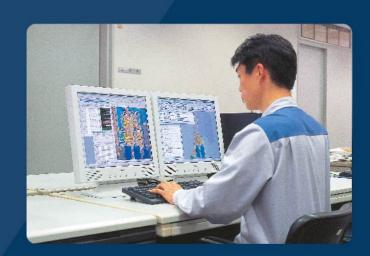

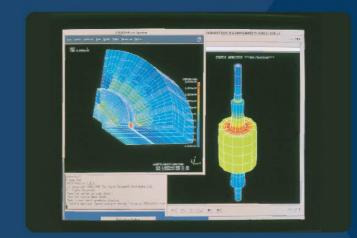

The Solutions Product Development Centre: Integrating
Air Conditioners with IT

Keeping in mind the changes in business brought in by the computerisation and networking of society, we have integrated IT into our airconditioners, including communication technology, software technology and digital control. We are initiating R&D that will offer new system services - a comfortable environment with superior energy savings by networking air conditioners. Such a scenario will enable them to exchange information with service centres.

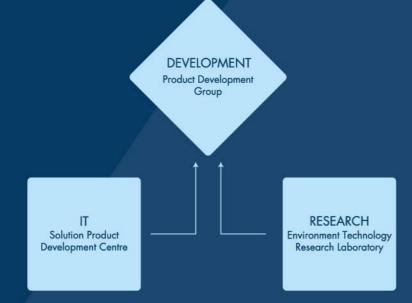



Technology & Innovation Centre, Japan:

Aiming for new value creation as a core base for technology development.



Research & Development Centre, India:

Reiterating to its commitment to Indian market, Daikin India R&D is dedicated to provide customised solutions to its customers.

7

X' TENSIVE RANGE UP TO 60 HP





World's most advanced XXX x air conditioning system with Innovative VRT technology.

First launched in Japan in 1982, the Daikin VRV system has been embraced by the world markets for over three decades. Now, we at Daikin introduce the next generation VRV X system to reinforce our industry leadership. The system offers an enhanced line-up to meet an ever widening variety of needs, while improving energy savings, comfort and ease of installation.

The VRV X is the most advanced air conditioning system in the world and is ideal for small and large spaces.

Energy saving technology for VRV X System

X' TRA POWER SAVINGS

Next Generation Compressor & VRT Smart Control VRT-Variable Refrigerant Temperature in Indoor Unit (IDU) and Outdoor Unit (ODU)

The new VRV X system now features VRT technology in IDU & ODU. VRT automatically adjusts refrigerant temperature to individual building load and climate requirement, thus further improving annual energy efficiency and maintaining comfort. With this technology, running costs are reduced.





X' TENDED RELIABILITY

Auto-Optimisation Refrigerant Charging

Standard Type

New series with compact and light weight design
6 HP-60 HP with 56 models line-up (For Heat Pump & Cooling Only)



Installation Space 0.95 m²
Product Weight* 285 kg

odel





Line-up

HP	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
Cooling Only/ Heat Pump																												

VRT Smart Control (Fully Automatic Energy-saving Refrigerant Control)

energy savings and comfortable air conditioning to meet actual operating conditions.

Optimally supply only for the needed capacity of indoor units

Target indoor units

Overview of the control (system control flow)

The following items are forcasted and calculated based

on the required capacity:

(which keeps the

saves energy and

ensures comfort

during low-load

operation.

compressor running)

9

X' TRA POWER SAVING



VRV+VRT+VAV

Software

New heights in energy efficiency during actual operation


The key to innovative energy savings is to increase efficiency during low-load operation.

Using data gathered from actual operation, Daikin discovered that air conditioning systems operate at a load factor of 50% or less for 70% of their annual operation period.

This inspired us to develop new technologies to enhance energy efficiency during low loads.

Utilising these technologies, Daikin's new VRV X series raise the standard for energy efficiency.

•Correlation between the load factor for the rated capacity and operation time *According to a survey by Daikin (based on Air Conditioning Network Service System data)

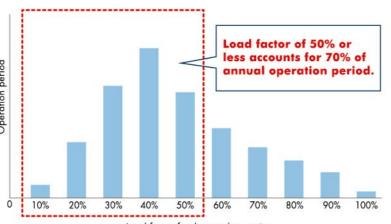

Load factor for the rated capacity

New Scroll Compressor*

Refrigerant leakage is minimised during low-load operation.

Operation loss due to refrigerant leakage is reduced by the proprietary back pressure control mechanism to ensure stable low-load operation.


Compressor efficiency New compresso Conventional compressor The back pressure control mechanism increases the efficiency during low-load operation. Load factor

*Graph shown above is for illustration purposes only

Back pressure control mechanism

Conventional mechanism

The movable scroll is pressed by the pressure difference between high and low pressures. The force pressing the movable scroll decreases during low-load operation, results in compression leakage from movable parts.



The force pressing the movable scroll decreases during low-load operation.

New intermediate pressure mechanism


Hardware technology

The force pressing the movable scroll is optimised according to operating conditions. The behaviour of the movable scroll has been stabilised to increase efficiency during low-load operation.



The intermediate pressure keeps pressing the movable scroll during low-load operation





3 Compressor speed control • Changes in the air-conditioned room temperature during low-load operation* The smooth control

Energy saving

Uniting advanced software and hardware technologies for greater

energy savings during actual operation.

Daikin developed VRT smart control by combining air volume control (VAV: Variable Air Volume) for indoor units with

optimal target refrigerant temperature based on data sent from each indoor unit. Coordination with the air volume control reduces compressor load and minimises operation loss based on detailed control. VRT smart control ensures

Different automatic energy-saving refrigerant control applies depending on the indoor units connected.

The VRT smart control also controls the airflow rate of indoor units

automatically* to attain detailed


conventional VRT control, which optimises compressor speed by calculating the required load for the entire system and

Conventional air-conditioning method Fully automatic energy-saving refrigerant control Changes in the room temperature: Large The power consumption attributed to the Changes in the room temperature: Small wasted power consumption is tart-stop loss also increases the load.

*Graph shown above is for illustration purpose only

- For the classification of indoor units (VRT smart control and VRT control), refer to page 20.
- · In case system is having both VRT Control and VRT Smart Control types of Indoor units, system will operate under VRT Control
- · If a system has air handling unit or outdoor-air processing type indoor units, VRT smart control and VRT control are disabled.

Higher efficiency is provided during rated operation.



Advanced oil temperature control Standby power consumption is reduced

data received from indoor units

The advanced oil temperature control reduces standby power consumption compared to conventional models. Standby power is needed for preheating refrigerator oil, which consumes substantial standby power and is reduced to save energy when the air conditioner is stopped.

Cooling operation conditions: Indoor temp, of 27°CDB, 19°CWB and outdoor temp, of 35°CDB.

/91/ **Y**

VRT - VARIABLE REFRIGERANT TEMPERATURE

State-of-the-art energy saving technology for VRV system


Customise your VRV system for optimal annual efficiency

The new VRV X system features VRT technology. VRT automatically adjusts refrigerant temperature to individual building and climate requirement, thus further improving annual energy efficiency and maintaining comfort.

With this excellent technology, running costs are reduced.


How is energy reduced?

During cooling, the refrigerant evaporating temperature (Te) is raised to minimise the difference with the condensing temperature. During heating, the condensing temperature (Tc) is lowered to minimise the difference to the evaporating temperature. Compressors work less and this reduces power comsumption.

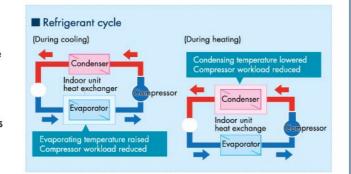

10

Typical changes in evaporating temperature and COP depending on changing indoor load

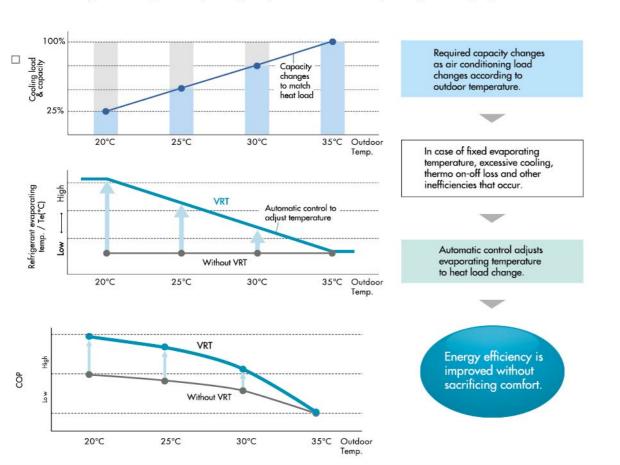


Fine control to match user preference available through mode selection


Basic mode is selected to maintain optimal comfort.

VRT is selected to save energy and prevent excessive cooling or heating.

28.05.19

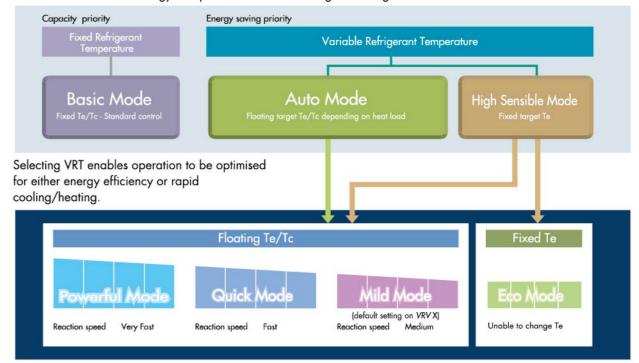


VRT offers quicker cool down to shorten uncomfortable pull down time.



Powerful mode	The refrigerant temperature can go low in cooling (high in heating) than the set minimum (maximum in heating). Gives priority to very fast reaction speed. The refrigerant temperature goes down (or up in heating) fast to keep the room setpoint stable.
Quick mode	Gives priority to fast reaction speed. The refrigerant temperature goes down (or up in heating) fast to keep the room setpoint stable.
Mild mode	Gives priority to efficiency. The refrigerant temperature goes down (or up in heating) gradually, giving


Recommended for use in these situations

☐ Cooling only regions having differences in daily temperature.



VRT is particularly effective at night when temperatures are low.

 Cooling/heating regions having periods of mild outdoor temperatures.



VRT is particularly effective during the intermediate periods.

13

X' CELLENT TECHNOLOGY



Large capacity all DC inverter compressor in compact casing

12

Large capacity inverter compressor using high tensile strength material, realise 12 HP compressor using 8 HP casing.

Compact & high efficiency concentrated winding motor Distributed winding motor Concentrated winding motor (New 12 HP compressor) (Current 8 HP compressor) Coil


Highly integrated heat exchanger

Small size coil end using concentrated winding, reduces copper loss(winding resistance).

Improves motor efficiency in low rpm range (improves intermediate efficiency).

Improves performance by increasing heat exchanger area while maintaining the same installation space.

Conventional



Fine Louvre Fin









Realises highly integrated heat exchanger performance by

employing 3 rows and reduced fin pitch coil as well as reduction

4D Inverter Technology

Improved reliability by introducing Daikin 3-phase capacitor-less 4D Inverter technology

4Ds mean...

- Direct Inverter
- Dynamic
- Drive
- High Energy Density
- Direct conversion circuit which eliminates the electrolytic capacitor and minimise the reactor size
- Dynamic waveform control that suppresses the resonance phenomenon generated by miniaturizing parts
- Drive technology
- High Density integration of parts on small printed circuit board



Film capacito

New Inverter PC Board

The control functions of inverter technology have been integrated on printed circuit boards. As well as improving reliability, this has reduced the number of parts and enabled downsizing.

- · New waveform control improves tolerance of variations in power supply voltage. Even if the power supply has irregularities, rises in current are suppressed and operation continues.
- Durability of the inverter printed circuit board improved by changing the electrolylic capacitors for the compressor to film capacitors.


Excellent Performance

Various advanced control main PC board

SMT* packaging technology

SMT packing technology adopted by the whole computer control panel improve the anti-clutter performance.


Protects your computer board from adverse effect of sandy and humid weather.





Improved inner design to increase smooth airflow

Downsizes electric component, relocates to dead space of bell mouth side to decrease airflow resistance.



15

ADVANCE TECHNOLOGY ACHIEVED

X' TENDED RELIABILITY



Excellent Performance



Refrigerant cooling technology, ensures stability of PCB temperature

14

Improves reliability at high ambient temperature

It is possible to cool the inverter power module stability even at high ambient temperature. This helps to keep air conditioning capacity and also ensures efficient and reliable operation.

Comfort

Lower operation sound

Improves heat exchanger efficiency, helps to reduce operation sound.

Large airflow, high static pressure and quiet technology.


Without increasing operation sound, advanced analytic technologies are utilised to optimise fan design, increase airflow rate and external static pressure.



8 HP 10 HP 12 HP

Quiet night-time operation function


Outdoor PCB automatically memorises the time when the peak outdoor temperature appears. It enables quiet operation mode after 8 h*1 and returns to normal mode after it keeps this on for 9 h*2.



- · This function is available in field setting.
- · The operating sound in quiet operation mode is the actual value
- The relationship of outdoor temperature (load) and time shown above
- . For 10 HP ODU.

Ease of Maintenance

VRV X series provides a maintenance feature* which allows the shut down of indoor unit without shutting down the whole VRV system. This feature comes in handy during maintenance period as the remaining indoor units continue to operate.

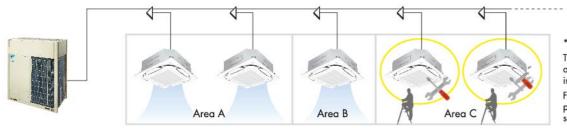

* Field setting is required. This feature does not apply to residential indoor unit connection. For more information. please contact Daikin sales office.


Automatic Refrigerant Charge Function

Contribute to optimised operation efficiency, higher quality and easier installation

Optimised operation efficiency


The automatic refrigerant charge function automatically determines the optimal amount of refrigerant to be charged.

This function prevents a capacity shortage or energy loss due to excessive or insufficient refrigerant.

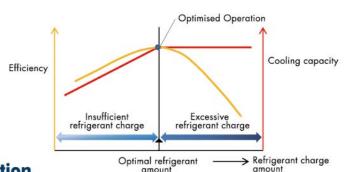

Higher quality and easier installation

The automatic refrigerant charge function automates the charging of the proper refrigerant amount and the closing of shut-off valves with just one press of the switch after pre-charging. Simplified installation eliminates excessive and insufficient refrigerant charge amounts due to calculation mistakes and this has led to higher installation quality.

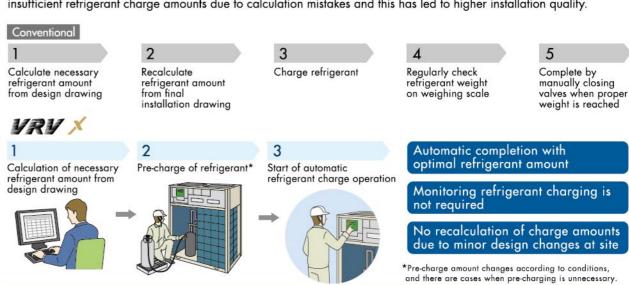

Multiple Advanced Features Ensuring More Accurate Test Operation And Stable System

Efficient automatic test operation

Automatically checks the wirings between outdoor units and indoor units to confirm whether there is a defective wiring.

Confirms and corrects the actual piping length.

Automatically checks whether the stop valve in each outdoor unit is in normal status to ensure the smooth operation of air conditioning system.

Automatic check





Free Phase Technology

Phase reversal occurs in areas where power supply is frequent. At the time of power recovery, phase reversal may take place due to AC source and device may stop for PCB protection. By employing Free Phase technology, continued operation is achieved.

X' TENDED RELIABILITY


MORE FLEXIBLE SYSTEM DESIGN



Simplified commissioning and after-sales service


Function of information display by luminous digital tube

VRV X system utilises the 7-segment luminous digital tubes to display system operation information, enabling the operational state to be visually displayed whilst facilitating simplified commissioning and after-sales service.

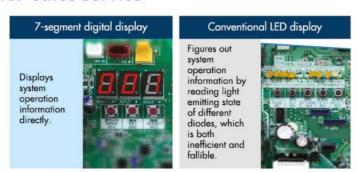

VRV configurator

- The VRV configurator is an advanced solution that allows for easy system configuration and commissioning.
- Less time is required on the roof configuring the outdoor unit.
- Multiple system at different sites can be managed in exactly the same way, thus offering simplified commissioning for key accounts.
- Initial setting on the outdoor unit can be easily retrieved.



Outdoor unit sequencing technology

Automatic sequencing operation

During start-up, the Daikin VRV X unit sequencing operation will be automatically enabled to ensure balanced operation of each outdoor unit to improve longevity of equipment and stable operation.











Double back-up operation functions responding resiliently to various unexpected situations


Double back-up operation functions

Daikin VRV X system boasts double back-up operation functions, which can secure the use of air conditioners in this area to the greatest extent by emergently enabling double back-up operation functions even if failure occurs in a set of air conditioning equipment. In the event of a failure, emergency operation can be enabled conveniently to allow the remaining system to operate in a limited fashion.

Compressor back-up Operation Function

If malfunction occurs in a compressor..

Emergency operation can be easily set and enabled by the outdoor unit (for a single outdoor unit system RXQ16-20ARY6 : for Cooling only model RXYQ14-20ARY6: for Heat Pump model).



Unit back-up operation function


If malfunction occurs in an outdoor unit, emergency operation can be conveniently set and enabled by the remote controller for indoor unit (for systems composed of two or more outdoor units).



More options for installation location

Long piping length

The long piping length provides more design flexibility, which can match even large-sized buildings.

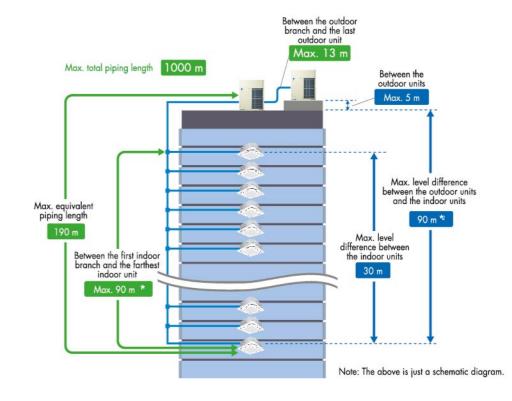

	Actual piping length (Equivalent)	165 m (190 m)
M	Total piping length	1000 m
Maximum allowable piping length	Between the first indoor branch and the farthest indoor unit	90 m*1
	Between the outdoor branch and the last outdoor unit (Equivalent)	10 m (13 m)
	Between the outdoor units (Multiple use)	5 m
Maximum allowable level difference	Between the indoor units	30 m
	Between the outdoor units and the indoor units	90m*²

- No special requirements up to 40 m. The maximum actual piping length can be 90 m, depending on conditions. Various conditions and requirements have to be met to allow utilisation of 90 m piping length.
- When level differences are 50 m or more, the diameter of the main liquid piping size must be increased. If the outdoor unit is above the indoor unit, a dedicated setting on the outdoor unit is required.

Connection ratio

Connection capacity at maximum is 200%.

Connection ratio 50%–200%

Connection ratio =

Total capacity index of the indoor units

Capacity index of the outdoor units

Conditions of VRV indoor unit connection capacity

Applicable VRV indoor units	FXDQ,	FXMQ-PB,	FXAQ, models	Other VRV indoor unit models*1
Single outdoor units		0000	,	200%
Double outdoor units		7()()9	0	160%
Triple outdoor units				130%

*1 For the FXFQ25 and FXVQ models, maximum connection ratio is 130% for the entire range of outdoor units.


Note: If the operational capacity of indoor units is more than 130%, low airflow operation is enforced in all the indoor units.

*Refer to page 65 for outdoor unit combination details.

16

OUTDOOR UNIT LINE-UP



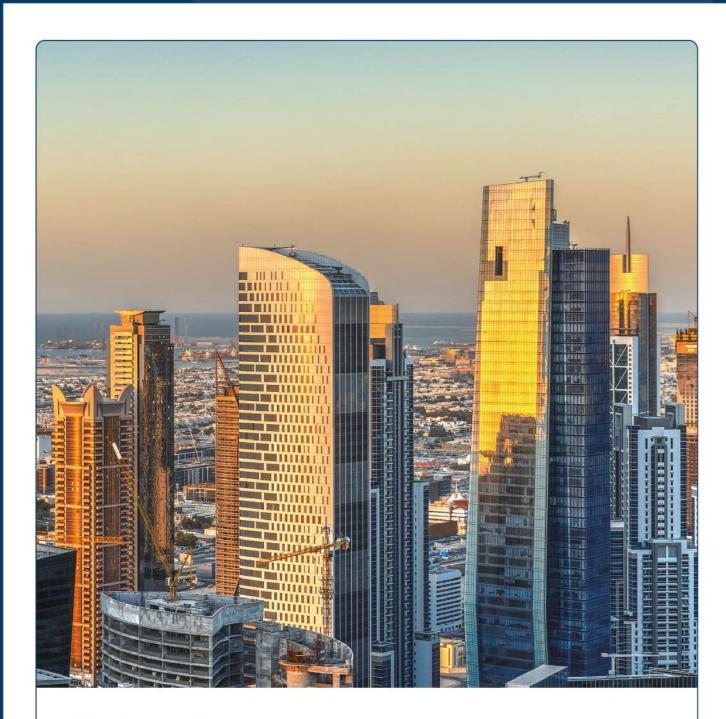

18

High external static pressure

VRV X outdoor unit has achieved high external static pressure up to 78.4 Pa, ensuring the efficient heat dissipation and stable operation of equipment in either hierarchical or intensive arrangement.

78.4 Pa

- More options in the opening/angle of louvre
 Outstanding heat dissipation effect in both hierarchical and intensive arrangement



Outdoor Units

The outdoor unit capacity is up to 60 HP in increment of 2 HP.

- VRV X outdoor unit offers a higher capacity of up to 60 HP, responding to the needs of large-sized buildings.
- The single outdoor unit has only 2 different shapes and dimensions, not only simplifying the design process, but also bringing the system flexibility to a new level.
- With the outdoor unit capacity increased in increment of 2 HP, customers' needs can be precisely met.

Standard Type

• Single Outdoor Units

6, 8, 10, 12 HP 14, 16 HP









RX(Y)Q20ARY6



18, 20 HP

Double Outdoor Units

22, 24 HP



26, 28, 30 HP

RX(Y)Q22ARY6 RX(Y)Q24ARY6

RX(Y)Q26ARY6 RX(Y)Q28ARY6 RX(Y)Q30ARY6

• Double Outdoor Units

RX(Y)Q6ARY6

RX(Y)Q8ARY6

RX(Y)Q10ARY6

RX(Y)Q12ARY6

32, 34, 36, 38, 40 HP



RX(Y)Q32ARY6 RX(Y)Q34ARY6 RX(Y)Q36ARY6 RX(Y)Q38ARY6 RX(Y)Q40ARY6

• Triple Outdoor Units

42, 44, 46, 48, 50, 52 HP



RX(Y)Q42ARY6 RX(Y)Q44ARY6 RX(Y)Q46ARY6 RX(Y)Q48ARY6 RX(Y)Q50ARY6 RX(Y)Q52ARY6



54, 56, 58, 60 HP

RX(Y)Q54ARY6 RX(Y)Q56ARY6 RX(Y)Q58ARY6 RX(Y)Q60ARY6

Line-up

HP	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60
Cooling Only/ Heat Pump																												•



Enhanced Range Of Choices

A variety of VRV indoor units is enabled in one system, opening the door to stylish and quiet indoor units.

16 types 77 models **VRV Indoor Units** Capacity Range | 0.8 HP | 1 HP | 1.25 HP | 1.6 HP | 2 HP | 2.5 HP | 3 HP | 3.2 HP | 4 HP | 5 HP | 6 HP | 7 HP | 8 HP | 10 HP | 16 HP | 20 HP 20 25 31.25 40 50 62.5 71 80 100 125 140 170 200 250 400 500 0000 FXFSQ-ARV16 000 VRT Smart Control 0000 0 0 000 FXEQ-AV Slim Ceiling Mounted Duct 000 FXMQ-PBV36 000 0000 0 VRT Smart Control 000 000 00 FXMQ-ARV16 0 0 0 FXHQ-MAVE 0 FXUQ-AVEB 0 FXAQ-ARVE6 00000 Wall Mounted VRT Smart Control 0 0 VRT FXLQ-MAVE Floor Standing Concealed Floor Standing VRT FXNQ-MAVE Floor Standing Duct 0000 0 VRT FXVQ-NY1(6) 000 FXBQ-PVE Clean Room Air Conditione VRT FXBPQ-PVE 0

At Daikin, we offer a wide range of indoor units, including both VRV and residential models, responding to a variety of needs of our customers that require air conditioning solutions.

VRV Indoor Units

Ceiling Mounted Cassette Round Flow & Round Flow with Sensing (Optional)

FXFSQ-ARV16



Presence of people and floor temperature can be detected to provide comfort and energy savings



Ceiling Mounted Cassette (Compact Multi Flow) Type

FXZQ-MVE



Quiet, compact and designed for



Ceiling Mounted Cassette (Double Flow) Type

FXCQ-AVM



Add finishing touch to your ceiling, with enhancing function and design



Ceiling Mounted Cassette Corner Type

FXEQ-AVE



Slim design for flexible



Slim Ceiling Mounted Duct Type

FXDQ-PDV36



FXDQ-NDV36



Slim design, quietness and static pressure switching

4-Way Flow Ceiling

This slim and stylish indoor unit

achieves optimum air distribution, and can be installed without the

Suspended Type

FXUQ-AVEB



Ceiling Mounted Duct Type

FXMQ-PBV36 FXMQ-ARV16

FXMQ-NVE



High/Mid external static pressure allows flexible installations



Ceiling Suspended Type

FXHQ-MAVE




Slim body with quiet and wide



need for ceiling cavity.





FXVQ-NY16 (High static pressure type)







FXAQ-ARVE6



Stylish flat panel design harmonised with your interior







22



VRV Indoor Units

Ceiling Mounted Cassette Round Flow & Round Flow with Sensing (Optional)


FXFSQ25A / FXFSQ32A / FXFSQ40A / FXFSQ50A / FXFSQ63A / FXFSQ80A FXFSQ100A / FXFSQ125A / FXFSQ140A



Round flow with sensing (Optional)

Presence of people and floor temperature can be detected to provide comfort and energy savings

Dual sensors*1



Infrared presence sensor

The 4 sensors detect human presence.

Ceiling height	2.7m	3.5m	4.0m
Detection range (diameter).3	approx. 8.5m	approx.	approx.

*3. The infrared presence sensor detects 80 cm above the floor

Infrared floor sensor

The sensor detects the floor temperature and automatically adjusts operation of the indoor unit to reduce the temperature difference between the ceiling and the floor.

Ceiling height	2.7m	3.5m	4.0m
Detection range	approx.	approx.	approx.
(diameter)*4		14m	16m

*4. The infrared floor sensor detects at the floor surface


Various sensing functions

Sensing sensor mode*5*6

Sensing sensor low mode (default: OFF)


When there are no people in a room, the set temperature is shifted automatically.

The system automatically saves energy by detecting whether or not the room is occupied. The set temperature is shifted automatically if the room is unoccupied.

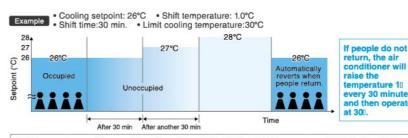

Shift temperature and time can be selected from 0.5 to 4° C in 0.5°C increments and 15, 30, 45, 60, 90 or 120 minutes respectively with remote controller.

- Applicable when sensing panel (BYCQ140EEF6/BYCQ125EEK) is installed.
 These functions are not available when using the group control system.
 User can set these functions with remote controller.





VRV Indoor Units

Sensing sensor stop mode (default: OFF)

When there are no people in a room, the system stops automatically.*7

The system automatically saves energy by detecting whether or not the room is occupied.

Based on preset user conditions, the system automatically stops operation if the room is unoccupied.


Absent stop time can be selected from 1 to 24 hrs in 1 hr increments with remote controller.



Auto airflow function*8

Direct Airflow (default: OFF)

When human presence is not detected



Optimal air direction by "Auto"

*8.Airflow direction shoud be set to "Auto".

Cooling Dry

When human presence is detected

24



Optimal air direction by "Auto"

Swing (narrow)

 With Auto airflow direction mode, flaps are controlled to deliver optimal airflow when the room is unoccupied.




· When human is detected, air direction is set to "Swing (narrow)" to deliver cool air to users.

Comfort and energy saving preventing over cooling'9


*9.Airflow direction and airflow rate should be set to "Auto".

Floor temperature is detected and over cooling prevented.

Cooling




Area around feet gets too cold because air conditioner continues until the temperature near the ceiling reaches the set temperature.



The floor temperature, which is lower than near the ceiling, is detected.

Automatic control using the temperature near the person as the room

The temperature near the person is automatically calculated by detecting the temperature of the floor. Energy is saved, because the area around the feet does not get too cold.

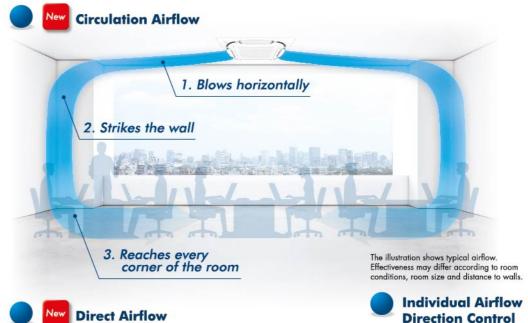



Direction Control




^{7.} Please note that upon re-entering the room, air conditioner will not switch on automatically.






26

Comfort to the entire room with even temperatures and no cold air pockets at floor level

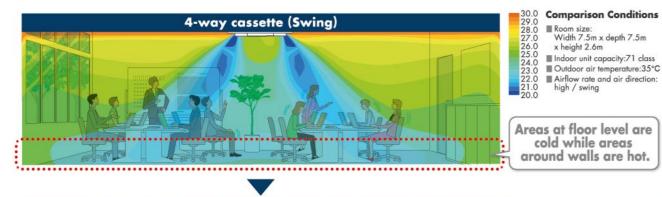

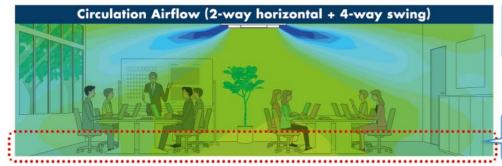

Approx. 5% energy savings by reducing uneven temperatures

*3.Calculated under the following 3. Calculated under the following comparison conditions:


When the average temperature at a height of 0.6m above the floor reaches set temperature. (26°C)

Full comfort is provided with no cold feet.

When the target

equipment conditions, room size and distance from indoor unit to walls

Configurations of Circulation Airflow

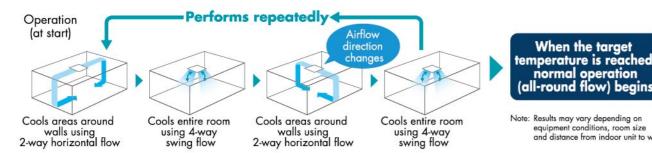


Three technologies that achieved circulation airflow

Flow-out is straight, horizontally and strong, so the air travels far and even reaches the wall from which it falls to the floor. This approach and technology makes circulation airflow possible.

Use of new wide flaps (Straight)

Compared to conventional models, the new wide flap increases straightness of the airflow, so coverage is approximately doubled.

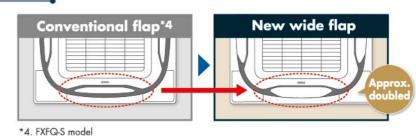


New wide flap construction inhibits ceiling dirt and grime

By tapering both flap ends, the airflow that causes dirty ceilings is directed downward.




2 Optimising airflow angle (Horizontally)

Even with the flap angle raised, a sufficient airflow route is maintained to realize a more horizontal airflow angle.

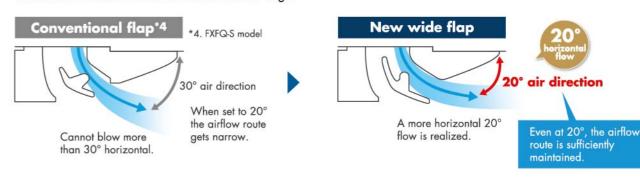

Increased velocity in 2-way flow (Strongly)

Velocity increased by making 2-way flow. Powerful airflow was realized.

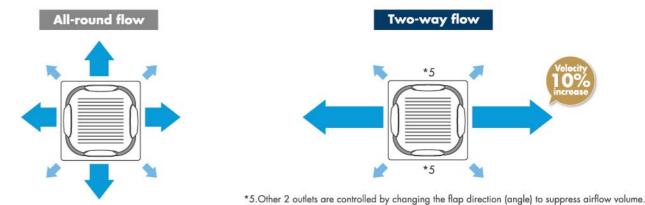






Comfortable air conditioning for all room layouts and conditions

Airflow direction can be individually adjusted for each air discharge outlet to deliver optimal air distribution.

Easy setting is possible with a wired remote controller.

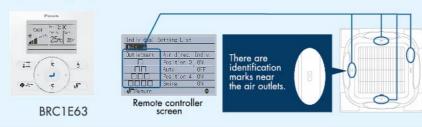

28



Individual airflow settings

- No individual setting (Auto airflow)
- Position 0 (Highest point)
- Position 1
- Position 2
 Position 3
- Position 4 (Lowest point)
- Swing


Individual settings are possible as stated above.

When individual airflow is selected, airflow direction can be adjusted to room layout.



For shops and restaurant





New Wide variety of decoration panels (Option)

• Designer choice has been given a boost with the increase in number of new types of decoration panels.











- Standard panel with sensing ———

Designer panel*2

Standard panel*2

New Designer panel (Option)



Decoration Panel Line-up (Option)









BYCQ125EAK (Black)

Sensing panel

BYCQ125EEK (Black)



Designer panel*1
BYCQ125EAPF (Fresh White)

*1. Sensing function is applicable when sensing panel is installed

New Auto grille panel (Option)*1

Sensing panel

BYCQ140EEF6 (Fresh White)

- Clogged filters strain performance of the indoor unit and may result in breakdowns. Impeded airflow through the filter also lowers operational efficiency, which increases electricity bills.
 With the auto grille, anyone can easily clean the filter, which translates to lower maintenance cost and longer life of the air conditioner.
- With the auto grille panel, motorised raising and lowering allows suction panel and air filter cleaning to be carried out without the need for a step ladder.

A dedicated wireless remote controller is supplied with the auto grille panel. \\

For these situations recommend

- Where the air is dusty and likely to soil the air conditioner.
- Where simple and quick filter and grille cleaning is a worthwhile benef




BYCQ125EASF (Fresh White)

 28



Comfortable airflow

 Indoor unit offers 360° airflow discharges air in all directions with more uniform temperature distribution.



There are areas of uneven temperature.




There are much fewer areas of uneven temperature.

Easy installation

Dead spot of airflow

 Drain pump is equipped as a standard accessory with a 850 mm lift.



30


Easy maintenance

 Internal hygiene can be easily checked without removing the whole panel. Simply opening the suction panel allows the internal drain pan to be checked.



24 mm diameter drain outlet

The drain outlet allows insertion of a finger or dental mirror for inspection of the internal cleanliness of the drain pan. Removal of the suction panel enables access.

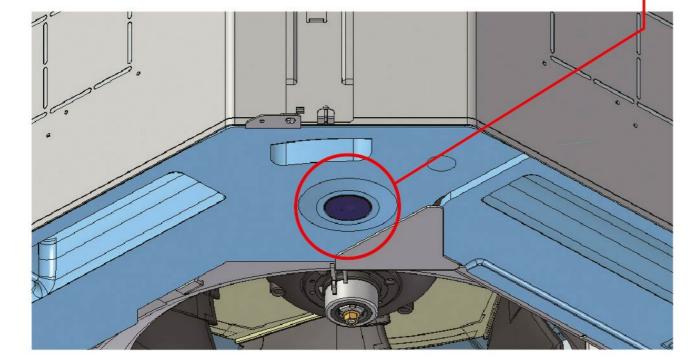

Example of airflow patterns

28.05.19

All-round flow is available, as well as 2-way to 4-way flows, so you can choose the most suitable airflow pattern depending on location or room layout.


All-round flow




4-way flow



3-way flow



L-shaped 2-way flow



Note: Whatever the discharge direction, the same type of panel is used. If installing for other than all-round flow, an air discharge outlet sealing material (option) must be used to close each unused outlet.

All-round flow is available, as well as 2-way to 4-way flows, so you can choose the most suitable airflow pattern depending on location or room layout.

 An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.

(The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)



 The air filter has an anti-mould and antibacterial treatment that prevents the growth of mould generated from dust or moisture that may adhere to the filter.



Control of the airflow rate can be selected from 5-step control and Auto.



VRV Indoor Units

Ceiling Mounted Cassette (Compact Multi Flow) Type

FXZQ20M / FXZQ25M / FXZQ32M FXZQ40M / FXZQ50M



32


Quiet, compact and designed for users comfort

 Dimensions correspond with 600 mm X 600 mm architectural module ceiling design specifications.


v operation sou	nd level			(dB)
FXZQ-M	20/25	32	40	50
Sound level (H/L)	30/25	32/26	36/28	41/33

Comfortable airflow

- 1 Wide discharge angle: 0° to 60°
 - Auto swing




Fixed angles: 5 levels



*Angles can be also set on site to prevent drafts (0°.35°) or soiling of the ceiling (25°.60°), other than standard setting (0°.60°).


2-, 3- and 4-way airflow patterns are available, enabling installation in the corner of a room.



*For 3-way or 2-way flow installation, the sealing member for air discharge outle (option) must be used to close each unused outlet.



Drain pump is equipped as standard accessory with 750 mm lift.



VRV Indoor Units

Ceiling Mounted Cassette (Double Flow) Type

FXCQ25AVM / FXCQ32AVM / FXCQ40AVM / FXCQ50AVM / FXCQ63AVM / FXCQ80AVM / FXCQ125AVM



Add finishing touch to your ceiling, with enhancing function and design.

Stylish unit blends easily with any interior. Integrated ceiling surface with sophisticated panel design with the adoption of flat flap. Add finishing touch to your ceiling, with enhancing function and design.

 Individual airflow direction control (Unavailable during automatic airflow mode, airflow angle: configurable from 0 to 4 swing positions.)

Individual flap control



The flat flaps close entirely when the unit is not operating and there are no air intake grilles visible.


 Reduced energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump.


Enhanced functions from various aspects such as

- Check contamination in drain pan by simply remove suction grille and panel.
- The flap parts are easy to clean because it is hard to condensate and get dirty.
- Equipped with long life filter which requires only 1-year maintenance interval.
- Adjuster pockets mount at four corners of the unit enable to adjust the main unit without removing the panel.
- Drain pump is equipped as standard accessory with 850 mm lift.



juster Pocket





(The lifespan of a silver ion cartridge depends on the usage environment, but should be changed once every two to three years.)



850 mm



 Easy visual inspection of drainage through the transparent body drain socket.



VRV Indoor Units

Ceiling Mounted Cassette Corner Type

FXEQ20AV / FXEQ25AV FXEQ32AV / FXEQ40AV FXEQ50AV / FXEQ63AV



34

Slim Design for Flexible Installation

- Single-flow type allows effective air discharge from corner or from drop-ceiling
- Dual-Flap for better air flow coverage
- United Grill design-Flap closes completely when AC is
- 3D airflow-Circulates a cloud of air right to the corners of even large spaces
- Easy maintenance-Screw-less design makes panel detachment faster and easier servicing





VRV Indoor Units

Slim Ceiling Mounted Duct Type

Slim design, quietness and

static pressure switching

Suited to use in drop-ceilings

FXDQ20PD / FXDQ25PD / FXDQ32PD

· Only 700 mm in width and 23 kg in weight, this model is suitable for installation in limited spaces like drop-ceilings in hotels.





Control of the airflow rate has been improved from 2-step to 3-step control.


Low operation soun	d level			(dB(A))
FXDQ-PD/ND	20/25/32	40	50	63
Sound level (HH/H/L)	33/31/29	34/32/30	35/33/31	36/34/32

- * The values of operation sound level represent those for rear-suction operation. Sound level values for bottom-suction operation can be obtained by adding 5 dB(A).
- Values are based on the following conditions: FXDQ-PD: external static pressure of 10 Pa; FXDQ-ND: external static pressure of 15 Pa.




FXDQ40ND / FXDQ50ND / FXDQ63ND


• Only 200 mm in height, this model can be installed in rooms with as little as 240 mm depth between the drop-ceiling and ceiling slab.



* 1,100 mm in width for the FXDQ63ND model.



- External static pressure selectable by remote controller switching makes this indoor unit a very comfortable and flexible model.
- 10 Pa-30 Pa/factory set: 10 Pa for FXDQ-PD models. 15 Pa-44 Pa/factory set: 15 Pa for FXDQ-ND models.
- FXDQ-PD and FXDQ-ND models are available with a drain pump as a standard accessory. FXDQ-PD/NDVE: with a drain pump (750 mm lift) as a standard





VRV Indoor Units

High Static Pressure Ceiling Mounted Duct Type

FXMQ20P / FXMQ25P / FXMQ32P FXMQ40P / FXMQ50P / FXMQ63P FXMQ80P / FXMQ100P / FXMQ125P FXMQ140P



36

High static pressure allows for flexible duct design

 A DC fan motor increases the external static pressure capacity range to include middle to high static pressures, increasing design flexibility.

30 Pa-100 Pa for FXMQ20P-32P


30 Pa-160 Pa for FXMQ40P

50 Pa-200 Pa for FXMQ50P-125P

50 Pa-140 Pa for FXMQ140P

All models are only 300 mm in height, an improvement over the 390 mm height of conventional models. The weight of the FXMQ40P has been reduced from 44 kg to 28 kg.

Drain pump is equipped as standard accessory with 700 mm lift.



Control of the airflow rate has been improved from 2-step to 3-step control.

FXMQ-P	20/25	32	40	50	63	80/100	125	140
Sound level (HH/H/L)	33/31/29	34/32/30	39/37/35	41/39/37	42/40/38	43/41/39	44/42/40	46/45/43

Energy-efficient

 The adopted DC fan motor is much more efficient than the conventional AC motor, yielding an approximate 20% decrease in energy consumption (FXMQ125P).



Improved ease of installation

Airflow rate can be controlled using a remote controller during test operations. With the conventional model, the airflow rate was controlled from the PC board. It is automatically adjusted to the range between approximately ±10% of the rated HH tap airflow for FXMQ20P-125P.

Improved ease of maintenance

The drain pan can be detached for easy cleaning.
 An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.

FXMQ170N/FXMQ200N FXMQ250N



Simplified Static Pressure Control

External static pressure can be easily adjusted using a change-over switch inside the electrical box to meet the resistance in the duct system.

VRV Indoor Units

Mid Static Pressure Ceiling Mounted Duct Type

FXMQ40A / FXMQ50A / FXMQ63A FXMQ80A / FXMQ100A

Mid static pressure allows for flexible duct design


 AC fan motor is installed to suit applications where external static pressure is required at nominal capacity.

30 Pa-50 Pa for FXMQ40-80ARV16

30 Pa-60 Pa for FXMQ100ARV16

All models are only 300 mm in height, an improvement over the 390 mm height of conventional models. The weight of the FXMQ40P has been reduced from 44 kg to 28 kg.

Drain pump is equipped as standard accessory with 700 mm lift.





High airflow rate

Airflow rate is optimised to meet wider spectrum of airflow requirements.

ow operation s	ound level				(dB(A))
FXMQ-A	40	50	63	80	100
Sound level (H/L)	39/37	41/39	42/40	43/41	44/42

Improved ease of maintenance

The drain pan can be detached for easy cleaning.
 An antibacterial treatment that uses silver ions has been applied to the drain pan, preventing the growth of slime, mould and bacteria that cause blockages and odours.



36



VRV Indoor Units

Ceiling Suspended Type

FXHQ32MA / FXHQ63MA / FXHQ100MA




38

Slim body with quiet and wide airflow

Adoption of QUIET STREAM FAN


Uses the quiet stream fan and many more advanced technologies.




Low operation soun	ow operation sound level			
FXHQ-MA	32	63	100	
Sound level	36/31	39/34	45/37	

Installation is easy

• Drain pump kit (optional) can be easily incorporated.



 Wide air discharge openings produce a spreading 100° airflow.






Maintenance is easy

Non-dew flap with no implanted bristles

Bristle-free flap minimises contamination and makes cleaning simpler.



- Easy-to-clean flat design
- Maintenance is easier because everything can be performed from below the unit.
- A long-life filter is equipped as standard accessory.
 - * 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m³

VRV Indoor Units

Wall Mounted Type

FXAQ20A / FXAQ25A FXAQ32A / FXAQ40A FXAQ50A / FXAQ63A



Stylish flat panel design harmonised with your interior décor



- Stylish flat panel design creates a graceful harmony that enhances any interior space.
- Flat panel can be cleaned with only the single pass of a cloth across their smooth surface.
- Vertical auto-swing realises efficiency of air distribution. The louvre closes automatically when the unit stops.



VRV Indoor Units

Floor Standing Type

FXLQ32MA / FXLQ50MA FXLQ63MA



Suitable for perimeter zone air conditioning

- Floor Standing types can be hung on the wall for easier cleaning.
 Running the piping from the back allows the unit to be hung on walls.
 Cleaning under the unit, where dust tends to accumulate, is considerably easier.
- The adoption of a fibre-less discharge grille, featuring an original design to prevent condensation, also helps prevent staining and makes cleaning easier.
- A long-life filter is equipped as standard accessory.
 *8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m³



Concealed Floor Standing Type

FXNQ32MA / FXNQ50MA FXNQ63MA



Designed to be concealed in the perimeter skirting-wall

- The unit is concealed in the skirting-wall of the perimeter, that creates a classy interior design.
- The connecting port faces downwards, greatly facilitating on-site piping work.
- A long-life filter is equipped as a standard accessory.
 - * 8 hr/day, 25 day/month. For dust concentration of 0.15 mg/m3



VRV Indoor Units

Floor Standing Duct Type

FXVQ125N / FXVQ200N FXVQ250N / FXVQ400N FXVQ500NY16

Large airflow type for large spaces. Flexible interior design for each customer.



 Various installations can be supported from full-scale duct connection airflow to direct airflow that allows for easy installation.

 Full-scale duct connection airflow allows for air conditioning evenly in spacious areas.

Duct connection airflow type

 Adding the plenum chamber (option) allows for simple operation with direct airflow.


* Note that the operation sound increases by approximately 5 dB(A).


Direct airflow type

- The high static pressure type driven by the belt drive system allows the usage of air discharge outlets in various shapes as well as long ducts. Highly flexible installation is possible.
- High maintainability design that allows major services and maintenance services to be performed at the front.
- A long-life filter is equipped as a standard accessory.
 *8 hr/day, 26 day/month. For dust concentration of 0.15 mg/m³
- A wide range of optional accessories is available such as high-efficiency filters.
- Outdoor air intake mode is useable as an outdoor-air processing airconditioner.

*When using the unit as an outdoor-air processing unit, there are some restrictions.





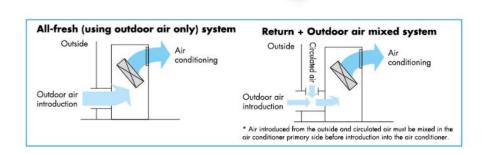

4

43

INDOOR UNIT LINE-UP



VRV Indoor Units

4-Way Flow Ceiling Suspended Type

FXUQ71A / FXUQ100A



This slim and stylish indoor unit achieves optimum air distribution and can be installed without a ceiling cavity.

- Unit body and suction panel adopted round shapes and realized a slim appearance design. The unit can be used for various locations such as the ceilings with no cavity and bore ceilings.
- · Flaps close automatically when the unit stops, which gives a simple
- · Unified slim height of 198 mm for all models that gives the unified impression even when models with different capacities are installed in the same area.





• Built-in electronic expansion valve eliminates the need for a BEV unit, which improves flexibility of installation.




· With adoption of the individual flap control, airflow direction adjustment can be individually set for each air outlet. Five directions of airflow and auto-swing can be selected with wired remote controller BRC1E62, which realizes the optimum air distribution.







- Control of the airflow rate has been improved from 2-step to 3-step control. Auto airflow rate control can be selected with wired remote controller BRC1E62.
- Energy efficiency has been improved, thanks to the adoption of new heat exchanger with smaller tubes, DC fan motor and DC drain pump motor.
- Drain pump is equipped as a standard accessory and the lift height has been improved from 500
- · Depending on the installation site requirements or room conditions, 2-way, 3-way and 4-way discharge patterns are available.



VRV Indoor Units

Clean Room Type Air Conditioner





Suitable for hospitals and other clean spaces

Easily provides the high cleanliness environment required by various industries

Daikin's clean room air conditioners are specially designed to achieve an environment cleanliness class 10.000. These air conditioners easily realize a cleanliness-class environment and help create a proper environment of hospitals, food and beverage factories, electronics factories and other spaces that require clean air.

Instances of installation by type (for a hospital)

Select the air flow system and installation method to match the layout and purpose of the room

Two types of clean room air conditioners are available - an integrated unit model and a separate outlet unit model. It is also possible to configure the air flow system to ceiling intake or floor-level intake according to the panel selected. This flexible design enables the air conditioner to easily adopt to any room layout or use.

Floor-level intake type Ceiling intake type (high speed contracted flow/high ceiling model) Construction work is simple and a ceiling installation is possible Dust filtering and air-conditioning can be started immediately. Easy to increase the cleanness and air-conditioning effect.

A low flow speed prevents drying of the affected part and the experience of drafts Features Cleanness class 100,000 to 10,000 Wind speed 1.0m/s or highe Approximately 0.5m/s Total air conditioning with an emphasis Somewhat concentrated air conditioning centered directly under the outlet Total air conditioning with an emphasis

*1. Cleanliness class. A scale expressing the cleanliness of air established by NASA (National Aeronautics and Space Administration). Class 10,000 represents a state of less than 10,000 minute particles of diameter under 0.5 µm per cubic foo For comparison, the cleanliness of a typical office is around class 1,000,000.

2. CCU (Cardiac Care Unit). A ward dedicated to the admission of patients with myocardial infarctions and other heart diseases.

3. ICU (Intensive Care Unit). A ward for the careful treatment and nursing of patients with serious illnesses, injuries, or recovering from operations.


tions: CCU*2 sterile rooms, etc.

Can be easily installed in existing buildings

A simple structure makes it easy to realize a highly clean environment with the same installation work as for a typical air conditioner. Can be easily installed in new buildings, existing structures and refurbishments.

Prevents uncomfortable drafts with a low flow speed of approximately 0.5m/s

The floor-level intake system has a low flow speed of approximately 0.5 m/s, improving dust filtration and eliminating the feeling of drafts. Broadly air-conditions the room with a gentle air flow and creates a comfortable environment



28.05.19

VRV INDOOR UNIT

Filtration

Class 10,000 clean room condition achieved with a **HEPA** filter (sold separately)

The low pressure-loss HEPA filter (sold separately) demonstrates superior dust filtering performance and easily accomplishes an air cleanliness of class 10,000.

HEPA filter

The HEPA filter has a structure incorporating a pleated glass fibre filter medium, making it highly efficient and suitable for clean rooms, etc.





Installation example (in a medical facility)

44


Antibacterial

Suppresses the propagation of bacteria in the duct with a proprietary antibacterial coating

The filter implements an antibacterial treatment with a new coating, combining a silver-based inorganic antibacterial material (an organic antibacterial material that is effective against germs) that prevents mould. This enhances the antibacterial properties of the duct. An antibacterial treatment using a silver-based organic substance reduces mould.

Antibacterial fibre used in the intake filter

With a long-life filter employing anti-mould antibacterial fibre near the intake, cleaning performance is further enhanced.



- Please be aware that antibacterial products suppress the propagation of bacteria but do not have a sterilising effect. Also, mould
- rease be aware not antiboderial products suppress me propagation of bacteria duri do not nave a sterilising effect. Also, mout may grow in places where dust or soot accumulates.


 A material for which the registered safety was verified by Japanese chemicals and dangerous substances regulation law (Act on the Evaluation of Chemical Substances and Regulation of Their Manufacture, etc.) is used for the antibacterial material. Periodic maintenance is required (such as cleaning the air filter and washing the inside to the unit).

Labour-saving

Filter maintenance unnecessary for about five years Easy access from underneath unit provides easy maintenance

The HEPA filter has an exceptionally long life and does not require maintenance for about five years. Daikin has aimed to reduce maintenance work from a variety of perspectives, including a service access system that eliminates the necessity for service panels.

*The maintenance period differs significantly according to the cleanliness of the room and hours of air conditioner operation.



Quiet

All models incorporate an industry-leading quiet design, operating at under 41dB

Operating noise is substantially reduced by employing a proprietary double-structure outlet filter chamber, sound absorbing insulation and a low pressure-loss HEPA filter. Sound level of all models are under 41dB (38dB during low-fan speed operation).

*Operating noise may be greater than these values in highly reflective locations.







VRV Indoor Units

Ceiling Mounted Cassette Round Flow & Round Flow with Sensing (Optional)



46

	MODEL		FXFSQ25ARV16	FXFSQ32ARV16	FXFSQ40ARV16	FXFSQ50ARV16	FXFSQ63ARV16	FXFSQ80ARV16	FXFSQ100ARV16	FXFSQ125ARV16	FXFSQ140ARV16		
Power suppl	у			1-phase, 220-240V, 50Hz									
c 1:		Btu/h	9,600	9,600 12,300 15,		19,100	00 24,200	30,700	38,200	47,800	54,600		
Cooling cap	acity	kW	2.8	3.6	4.5	5.6	7.1	9.0	11.2	14.0	16.0		
tt. e	**	Btu/h	10,900	13,600	17,100	21,500	27,300	34,100	42,700	54,600	54,600		
Heating cap	acity	kW	3.2	4.0	5.0	6.3	8.0	10.0	12.5	16.0	16.0		
Casing				100		G	alvanised steel pla	ate					
Airflow rate (H/HM/M/ML/L)		m³/min	13/12.5/1	1.5/11/10	17/13.5/12.5/12/11	23/20.5/19/14.5/11	23.5/21/20/16/13.5	24.5/22/20.5/20/15	33.5/30.5/27/23.5/21	34.5/31.5/28.5/25.5/23	35.5/32.5/29.5/26.5/23		
		cfm	459/441/40	06/388/353	600/477/441/424/388	812/724/671/512/388	830/742/706/565/477	865/777/724/706/530	1,183/1,077/954/830/742	1218/1112/1006/901/812	1,254/1,148/1,042/936/812		
Sound level (H/HM/M/ML/L) dB(A)		30/29.5/28.5/28/27		35/29.5/29/28/27	38/35/34.5/29.5/27	38/36/35.5/31.5/28	39/37/36/35.5/31	44/41/38/35/33	45/42.5/39.5/37/35	46/43.5/40.5/38/35			
Dimensions	(HxWxD)	mm		256×840×840 298×840×840									
Machine we	ight	kg		19				22			26		
	Liquid (Flare)	002 0		Ø	6.4		Ø 9.5						
Piping	Gas (Flare)	mm		Ø	2.7		Ø 15.9						
connections	Drain					VP25 (Exter	mal Dia, 32/Inter	nal Dia, 25)					
Standard	Model					BYCG	125EAF6 (Fresh	White)					
Panel (Non Sensing) Dimensions (HxWxD)		mm					50x950x950						
(White) Weight		kg					5.5						
Sensing Model						BYCG	140EEF6 (Fresh	White)					
Panel	Dimensions (HxWxD)	mm					50x950x950						
(White)	Weight	kg					5.5						

Note: Specifications are based on the following conditions;

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
 Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Decora	tion Panel (Optio	n)	Round Flow Type
	A. A.		FXFSQ-A
C1 1	Model		BYCQ125EAF6 (Fresh White) / BYCQ125EAK (Black)
Standard panel	Dimensions (HxWxD) mm		50×950×950
J	Weight	kg	5.5
	Model		BYCQ140EEF6 (Fresh White) / BYCQ125EEK
Sensing panel	Dimensions (HxWxD)	mm	50×950×950
panie.	Weight	kg	5.5
n .	Model		BYCQ125EAPF (Fresh White)
Designer panel	Dimensions (HxWxD)	mm	97×950×950
Paria	Weight	kg	6.5
Auto	Model		BYCQ125EASF (Fresh White)
grille	Dimensions (HxWxD)	mm	105×950×950
panel	Weight	kg	8

Designer panel

BYCQ125EAPF (Fresh White)



Standard panel BYCQ125EAF6 (Fresh White)



BYCQ140EEF6 (Fresh White)



Standard panel BYCQ125EAK (Black)



Sensing panel BYCQ125EEK (Black)



BYCQ125EASF (Fresh White)

Note: When opting Black panel, wireless remote controller model will be BRC7M634K

Ceiling Mounted Cassette (Compact Multi-Flow) Type



	MODI	EL		FXZQ20MVE9	FXZQ25MVE9	FXZQ32MVE9	FXZQ40MVE9	FXZQ50MVE		
Power supp	у				1-pha	se, 220-240 V/220 V,	50 Hz			
C1:			Btu/h	7,500 9,600		12,300	15,400	19,100		
Cooling capacity k		kW	2.2	2.8	3.6	4.5	5.6			
Hant'ne and			Btu/h	8,500	10,900	13,600	17,100	21,500		
Heating capacity kW		kW	2.5	3.2	4.0	5.0	6.3			
Casing						Galvanised steel plate		i.		
Airflow rate	/L//)		m³/min	9.	/7	9.5/7.5	11/8	14/10		
Alrilow rate	(П/Ц		cfm	318	/247	335/265	388/282	493/353		
Sound level	(H/L)	230 V	dB(A)	30/25		32/26	36/28	41/33		
Dimensions	(HxWxD)		mm	286×575×575						
Machine we	ight		kg	18						
	Liquid (Fla	re)				Ø 6.4				
Piping connections	Gas (Flare		mm			Ø 12.7				
COMPOCIONS	Drain				VP20 (Ex	sternal Dia, 26/Internal	Dia, 20)			
	Model					BYFQ60B3W1				
Panel	Colour	,	2			White (6.5Y9.5/0.5)				
(Option)	Dimension	s(HxWxD)	mm			55×700×700				
	Weight		kg			2.7				

Note: Specification are based on the following conditions;

- Cooling: Indoor temp.: 27°CD8, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Heating: Indoor temp.: 20°CD8, Outdoor temp.: 7°CD8, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
 Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
 During actual operation, these values are normally somewhat higher as a result of ambient conditions.



VRV Indoor Units

Ceiling Mounted Cassette (Double Flow) **Type**



	MODEL		FXCQ25AVM	FXCQ32AVM	FXCQ40AVM	FXCQ50AVM	FXCQ63AVM	FXCQ80AVM	FXCQ125AVM		
Power supply			1-phase, 220-240 V/50 Hz								
a !		Btu/h	9,600	12,300	15,400	19,100	24,200	30,700	47,800		
Cooling capaci	ty .	kW	2.8	3.6	4.5	5.6	7.1	9.0	14.0		
	***	Btu/h	10,900	13,600	17,100	21,500	27,300	34,100	54,600		
Heating capaci	iy .	kW	3.2	4.0	5.0	6.3	8.0	10.0	16.0		
Casing					Go	lvanised steel p	ate				
		m³/min	11.5/10.5/9.5/8.5/8		12/11/10.5/9.5/8.5	15/14/13/11.5/10.5	16/15/14/12.5/11.5	26/24/22.5/20.5/18.5	32/29.5/27.5/25/22.5		
Airflow rate (H	H/M/L)	cfm	406/371/33	35/300/282	424/388/371/335/300	530/494/459/406/371	565/530/494/441/406	918/847/794/724/653	1130/1041/971/883/794		
Sound level (H/	(L) 220 V	dB(A)	34/33/31/30/29	34/33/32/31/30	36/35/33/32/31	37/36/35/33/31	39/38/37/35/32	42/40/38/36/33	46/44/42/40/38		
Dimensions (Hx	(W×D)	mm	305x775x620			305x990x620 305x1,445x620			1,445x620		
Machine weigh	t	kg		19		22	25	33	38		
	Liquid (Flare)			ø	6.4			ø9.5	ø9.5		
Piping connections	Gas (Flare)	mm		øl	2.7			ø15.9			
connections	Drain				VP25 (Extern	nal Dia, 32/Inte	rnal Dia, 25)				
Model				BYBCQ40CF		ВУВСО	Q63CF	ВУВСО	1125CF		
Panel Colour					Fresh	white (6.5Y 9.5	.5/0.5)				
(Option)	Dimensions(HxWxD)	mm		55x1,070x700		55x1,2	85×700	55x1,7	40x700		
	Weight	kg		10		1	1	13			

48

Ceiling Mounted Cassette Corner Type



	MOI	DEL	93	FXEQ20AV36	FXEQ25AV36	FXEQ32AV36	FXEQ40AV36	FXEQ50AV36	FXEQ63AV36			
Power supply	,				1-phase, 230V, 50 Hz							
Cooling Cap	a aib.		Btu/h	7,500	9,600	12,300	15,400	19,100	24,200			
Cooling Cap	acity		kW	2.2	2.8	3.6	4.5	5.6	7.1			
Heating Cap	a a ib.	8	Btu/h	8,500	10,900	13,600	17,100	21,500	27,300			
nearing Cap	acily		kW	2.5	3.2	4.0	5.0	6.3	8.0			
Casing/Colour				Galvanised steel plate								
Dimensions (HxWxD)	mm		200×8	40x470		200x12	240×470			
Airflow Rate			m³/min	6.0/5.4/4.9/4.4/4	6.9/6.4/5.8/5.3/4	8.0/7.5/7.0/6.3/5	9.8/8.8/7.8/7.0/6	12.5/11.4/10.4/9.5/8	15.0/13.6/12.2/11.4/9.8			
(H/HM/M/N	AL/L)	Cooling	cfm	212/191/173/155/14	244/226/205/187/16	282/265/247/222/19	346/311/275/247/21	441/402/367/335/30	530/480/431/388/346			
VA.00.0000000	Liquid	Pipes	mm				Ø 9.5 (Flore Connection)					
Piping connections	Gas P	ipes	mm				Ø 15.9 (Flare Connection)					
connections	Drain	Pipe	mm			33						
Mass			Kg		17		18	23	23			
Sound Pressu (H/HM/M/ML	re Level /L)	Cooling	dB (A)	30/29/28/27/26	32/31/30/29/28	35/34/33/32/30	38/37/35/33/31	38/37/35/33/31	43/41/39/37/35			
		Model			BYEP4	0AW16		BYEP63	3AW16			
P		Panel Colou	ır			Fresh	White					
Decoration P (Options)	anel	Dimensions (HxWxD)	mm		80x95	80x13	50×550					
		Air Filter				Resin net (with r	nould resistance)					
		Mass	Kg			8		1	0			

- Note: Specifications are based on the following conditions:

 Cooling: Indoor temp.: 27°CDB, 19°CVB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0m

 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.

 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.

 Sound level: (FXCO-M) Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. (FXEQ-AV) Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Slim Ceiling Mounted Duct Type (700 mm width type)



MODEL	with dr	ain pump	FXDQ20PDV36	FXDQ25PDV36	FXDQ32PDV36			
Power supply				1-phase, 220-240 V/220 V, 50 Hz				
Cooling capa	rity	Btu/h	7,500	9,600	12,300			
coomig capa	City City	kW	2.2	2.8	3.6			
Heating capa	rity	Btu/h	8,500	10,900	13,600			
riodinig cape		kW	2.5	3.2	4.0			
Casing		(c) 2	Galvanised steel plate					
4· n	111/11/13	m³/min	8.0/7.2/6.4	8.0/7.2/6.4	8.0/7.2/6.4			
Airflow rate (HH/H/L)	cfm	282/254/226	282/254/226	282/254/226			
External statio	pressure	Pa	30-10*2					
Sound level (I	H/H/L) *1*3	dB(A)	33/31/29	33/31/29	33/31/29			
Dimensions (HxWxD)	mm	200×700×620	200×700×620	200×700×620			
Machine wei	ght	kg	23.0	23.0	23.0			
	Liquid (Flare)		ø 6.4	ø 6.4	ø 6.4			
connections	Gas (Flare)	mm	ø 12.7	ø 12.7	ø 12.7			
	Drain		VP20 (External Dia, 26/Internal Dia, 20)					

Slim Ceiling Mounted Duct Type (900/1,100 mm width type)



MODEL	. with dr	ain pump	FXDQ40NDV36	FXDQ50NDV36	FXDQ63NDV36			
Power supply	,		1-phase, 220-240 V/220 V, 50 Hz					
Cooling capa	scity	Btu/h	15,400	19,100	24,200			
3 p,		kW	4.5	5.6	7.1			
Heating capacity		Btu/h	17,100	21,500	27,300			
ricaling cape	icity	kW	5.0	6.3	8.0			
Casing			Galvanised steel plate					
Airflow rate (HH/H/L)		m³/min	10.5/9.5/8.5	12.5/11.0/10.0	16.5/14.5/13.0			
Airflow rate (HH/H/L)	cfm	371/335/300	441/388/353	583/512/459			
external statio	pressure	Pa	44-15* ²					
Sound level (I	HH/H/L) *1*3	dB(A)	34/32/30	35/33/31	36/34/32			
Dimensions (I	HxWxD)	mm	200×900×620	200×900×620	200×1,100×620			
Machine wei	ght	kg	27.0	28.0	31.0			
	Liquid (Flare)		ø 6.4	ø 6.4	Ø 9.5			
connections	Gas (Flare)	mm	ø 12.7	ø 12.7	Ø 15.9			
	Drain		VP20 (External Dia, 26/Internal Dia, 20)					

Note: Specifications are based on the following conditions;

- Note: Specifications are based on the following conditions;

 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.

 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.

 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.

 Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.

 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

 ★ 1: Values are based on the following conditions: FXDQ-P: external static pressure of 10 Pa; FXDQ-N: external static pressure of 15 Pa.

 ★ 2: External static pressure is changeable to set by the remote controller. This pressure means "High static pressure Standard".

 [Factory setting is 10 Pa for FXDQ-P models and 15 Pa for FXDQ-N models.]

 ★ 3: The values of operation sound level represent those for rear-suction operation. Sound level values for bottom-suction operation can be obtained by adding 5 dB(A).



VRV Indoor Units

Mid Static Pressure Ceiling Mounted Duct Type



MODEL	. with o	Irain pump	FXMQ40ARV16	FXMQ50ARV16	FXMQ63ARV16	FXMQ80ARV16	FXMQ100ARV16		
Power supply	,			1-pha	se, 220-240 V, 50 Hz	3			
Cooling capacity		Btu/h	15,400	19,100	24,200	30,700	38,200		
		kW	4.5	5.6	7.1	9.0	11.2		
Heating capacity		Btu/h	17,100	21,500	27,300	34,100	42,700		
ricaling cape	icity	kW	5.0	6.3	8.0	10.0	12.5		
Casing					Galvanized Steel Plate				
		m³/min	15/12	19/16	24/20	30/25	34/29		
Airflow rate (HH/H/L)	cfm	530/425	671/565	848/706	1060/883	1200/1024		
External statio	pressure	Pa		30-	50		30-60		
Sound level (I	H/L)	dB(A)	39/37	41/39	42/40	43/41	44/42		
Dimensions (I	HxWxD)	mm	300x7	00x700		300x1000x700			
Machine wei	ght	kg	27	28	35	i	36		
Liquid (Flare			6.4 (Flare	Connection)	9.5 (Flare Connection)				
Dining	Gas (Flare)	mm	12.7 (Flare	Connection)		15.9 (Flare Connection)		
connections	Drain		VP25 (External Dia. 32, Internal Dia. 25						

50

- Note: Specifications are based on the following conditions:

 Cooling: Indoor temp.: 27°CDB, 19°CVB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.

 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.

 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.

 Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.

Ceiling Mounted Duct Type



	MODEL		FXMQ20PVE	FXMQ25PVE	FXMQ32PVE	FXMQ40PBV36	FXMQ50PBV36			
Power supply	,			1-pho	ase, 220-240 V/220 V,	50 Hz				
Cooling capacity		Btu/h	7,500 9,600		12,300	15,400	19,100			
Cooling capa	icity	kW	2.2	2.8	3.6	4.5	5.6			
Heating capa	icity	Btu/h	8,500	10,900	13,600	17,100	21,500			
ricaning cap.	iciiy	kW	2.5	3.2	4.0	5.0	6.3			
Casing			Galvanised steel plate							
		m³/min	9/7.5/6.5		9.5/8/7	16/13/11	18/16.5/15			
Airflow rate	HH/H/L)	cfm	318/265/230		335/282/247	565/459/388	635/582/530			
External statio	pressure	Pa	3,000,00000	30-100 (50) *2	30-160 (100) *2	50-200 (100) *2				
Sound level (HH/H/L)	dB(A)	33/3	11/29	34/32/30	39/37/35	41/39/37			
Dimensions (HxWxD)	mm		300X550X700		300X700X700	300X1,000X700			
Machine wei	ght	kg		25		27	35			
Piping connections Liquid (Flare) Gas (Flare) Drain				20100	Ø 6.4					
		mm	Ø 12.7							
				VP25 (E	external Dia, 32/Internal	Dia, 25)				

	MODEL		FXMQ63PBV36	FXMQ80PBV36	FXMQ100PBV36	FXMQ125PBV36	FXMQ140PBV36			
Power supply	Į.			1-ph	ase, 220-240 V/220 V,	50 Hz				
Cooling capacity		Btu/h	24,200	30,700	38,200	47,800	54,600			
cooming cupo	icity	kW	7.1	9.0	11.2	14.0	16.0			
Heating capa	icity	Btu/h	27,300	34,100	42,700	54,600	61,400			
r louing cupe	icily	kW	8.0	10.0	12.5	16.0	18.0			
Casing			Galvanised steel plate							
		m³/min	19.5/17.5/16	25/22.5/20	32/27/23	39/33/28	46/39/32			
Airflow rate (HH/H/L)	cfm	688/618/565	883/794/706	1,130/953/812	1,377/1,165/988	1,624/1,377/1,130			
External statio	pressure	Pa		50-200 (100) *2		50-200 (100)*2	50-140 (100) *2			
Sound level (H	HH/H/L)	dB(A)	42/40/38	43/41/39	43/41/39	44/42/40	46/45/43			
Dimensions (H×W×D)	mm	300×1,0	000x700		300x1,400x700				
Machine weig	ght	kg	3	15	45		46			
Liquid (Flare)					9.5					
Piping Gas (Flare	Gas (Flare)	mm			15.9					
connections	Drain			VP25 (I	External Dia, 32/Internal I	Dia, 25)				

Note: Specifications are based on the following conditations

- Cooling: Indoor temp: 27°CDB, 19°CWB, Outdoor temp:: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Heating: Indoor temp:: 20°CDB, Outdoor temp:: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
 Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

 1: Power consumption values are based on conditions of rated external static pressure.

 2: External static pressure can be modified using a remate controller that offers seven (FXMQ20-32P), thirteen (FXMQ40P), fourteen (FXMQ50-125P) or ten (FXMQ140P) levels of control. These values indicate the lowest and highest possible static pressures. The standard static pressure is 50 Pa for FXMQ20-32P and 100 Pa for FXMQ40-140P.



VRV Indoor Units

Ceiling Mounted Duct Type



	MODEL		FXMQ170NVE6	FXMQ200NVE6	FXMQ250NVE6			
Power supply	,		1-phase, 220, 240 V/220 V, 50 Hz					
Cooling capa	scity	Btu/h	65,800	76,400	95,500			
cooming capacity		kW	19.3	22.4	28			
Heating capacity		Btu/h	71,600	83,300	1,07,500			
ricaling cape	icity	kW	21	25	31.5			
Casing			Galvanised steel plate					
n	2165	m³/min	58/50	65/58	80/73			
Airflow rate (H/L)	cfm	2,047/1,765	2,295/2,047	2,825/2,578			
External statio	pressure	Pa	100-140*2	100-200 *2	190-270*2			
Sound level (I	H/L) 220V	dB(A)	45/42	47/45	49/47			
Dimensions (I	HxWxD)	mm	440x1,1	90x1,090	440x1,490x1,090			
Machine wei	ght	kg	1	10	130			
Liquid (Flare)				Ø 9.5				
Piping	Gas (Flare)	mm	Ø	19.1	Ø 22.2			
connections	Drain			External Dia 32				

52

Ceiling Suspended Type



	MODEL		FXHQ32MAVE	FXHQ32MAVE FXHQ63MAVE			
Power supply	,		1-phase, 220-240 V/220 V, 50 Hz				
Cooling capa	ıcity	Btu/h	12,300	24,200	38,200		
coomig cape	,	kW	3.6	7.1	11.2		
Heating capacity		Btu/h	13,600	27,300	42,700		
		kW	4.0	8.0	12.5		
Casing				White (10Y9/0.5)			
A . ft		m³/min	12/10	17.5/14	25/19.5		
Airflow rate (H/L)	cfm	424/353	618/494	883/688		
Sound level (I	H/L) 220V	dB(A)	36/31	39/34	45/37		
Dimensions (I	HxWxD)	mm	195×960×680	195×1,160×680	195×1,400×680		
Machine wei	ght	kg	24.0	28.0	33.0		
21.21	Liquid (Flare)		Ø 6.4	Ø 9.5	Ø 9.5		
Piping connections	Gas (Flare)	mm	Ø 12.7	Ø 15.9	Ø 15.9		
	Drain		VP20 (External Dia, 26/Internal Dia, 20)				

Note: Specifications are based on the following conditions

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
 Sound level: [FXMG-MA] Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
 [FXHG-MA] Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward.
 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

 1: Power consumption values are based on conditions of standard external static pressure is changeable to change over the connectors inside electrical box, this pressure means "Standard-High static pressure".

4-way Flow Ceiling Suspended Type



	MODEL		FXUQ71AVEB	FXUQ100AVEB			
Power supply	,		1-phase, 220-240 V/220-230V, 50 Hz				
Cooling capa	ncity	Btu/h	27,300	38,200			
cooming capa	a.i.y	kW	8.0	11.2			
Heating capacity		Btu/h	30,700	42,700			
		kW	9.0	12.5			
Casing		7	Fresh white				
A : 0	n. / n.	m³/min	22.5/19.5/16	31/26/21			
Airflow rate	(H/L)	cfm	794/688/565	1,094/918/741			
Sound level (I	H/M//L)	dB(A)	40/38/36	47/44/40			
Dimensions (HxWxD)	mm	19 8 ×9	50×950			
Machine wei	ght	kg	26	27			
Liquid (Flare)			9	.5			
Piping connections	Gas (Flare)	mm	15.9				
	Drain		VP20 (External Dia, 26/Internal Dia, 20)				

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
 Sound level: Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre.
 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Wall Mounted Type

	MODEL		FXAQ20ARVE6	FXAQ25ARVE6	FXAQ32ARVE6	FXAQ40ARVE6	FXAQ50ARVE6	FXAQ63ARVE6		
Power supply	,		1-phase, 220 V/220 V, 50 Hz							
Cooling capacity		Btu/h	7,500	7,500 9,600 12,300 15,400 19,100				24,200		
		kW	2.2	2.8	3.6	4.5	5.6	7.1		
meating capacity		Btu/h	8,500	10,900	13,600	17,100	21,500	27,300		
		kW	2.5	3.2	4.0	5.0	6.3	8.0		
Casing			White (N9.5)							
		m³/min	7.5/4.5	9/5	11/5.5	13/9	15/12	19/14		
Airflow rate	H/L)	cfm	265/159	318/177	388/194	459/318	530/424	671/494		
Sound level (H/L)	dB(A)	35/31	36/31	38/31	39/34	42/37	47/41		
Dimensions (HxWxD)	mm	298×929×258							
Machine wei	ght	kg	13.0							
	Liquid (Flare)					Ø 9.5				
Piping connections	Gas (Flare)	mm		Ø 12.7						
	Drain			VP13 (External Dia, 18/Internal Dia, 13)						



VRV Indoor Units

Floor Standing Type/Concealed Floor Standing Type







Heating capacity

	MODEL		FXLQ32MAVE	FXLQ50MAVE	FXLQ63MAVE		
	MODEL		FXNQ32MAVE	FXNQ50MAVE	FXNQ63MAVE		
Power supply	8		1-phase, 220-240 V/220 V, 50 Hz				
Cooling capa	city	Btu/h	12,300	19,100	24,200		
kW		kW	3.6	5.6	7.1		
Heating capacity Btu/h kW		Btu/h	13,600	21,500	27,300		
		kW	4.0	6.3	8.0		
Casing			FXLQ: Ivory white (5Y7.5/1)/FXNQ: Galvanised steel plate				
4: 0 . (1.4) m ³		m³/min	8/6	14/11	16/12		
Airflow rate (п/ц	cfm	282/212	494/388	565/424		
Sound level (H	1/L) 220V	dB(A)	35/32	39/34	40/35		
Dimensions	FXLQ	mm 600×1,140×222		600×1,420×222	600×1,420×222		
(HxWxD)	FXNQ	cfm 282/212 220V dB(A) 35/32 EXLQ mm 600×1,140×222	610×1,350×220	610×1,350×220			
Machine wei	FXLQ	kg	30.0	36.0	36.0		
THOUSING WOIL	FXNQ		23.0	27.0	27.0		
	Liquid (Flare)		Ø 6.4	Ø 6.4	ø 9.5		
Piping connections	Gas (Flare)	mm	Ø 12.7	Ø 12.7	Ø 15.9		
	Drain		21O.D.				

54

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
 Sound level: [FXAQ-P] Anechoic chamber conversion value, measured at a point 1 m in front of the unit and 1 m downward.
 [FXIQ-MA, FXNQ-MA] Anechoic chamber conversion value, measured at a point 1.5 m in front of the unit at a height of 1.5 m.

Floor Standing Duct Type



	MODEL		FXVQ125NY1	FXVQ200NY1	FXVQ250NY1	FXVQ400NY1	FXVQ500NY16		
Power supply			3-phase 4-wire system, 380 -415 V, 50 Hz						
Cooling capacity		Btu/h	47,800	76,400	95,500	1,54,000	1,91,000		
		kW	14.0	22.4	28.0	45.0	56.0		
Heating capacity Btu/h kW		Btu/h	54,600	85,300	1,07,500	1,71,000	2,15,000		
		kW	16.0	25.0	31.5	50.0	63.0		
Casing colou	r		Ivory white (5Y7.5/1)						
Dimensions (HxWxD) mm		mm	1670×750×510	1670×950×510	1670×1170×510	1900×1170×720	1900×1470×720		
Machine weight kg			118	144	169	236	306		
Airflow rate		m³/min	43	69	86	134	172		
Airtiow rate		cfm	1,518	2,436	3,036	4,730	6,072		
External statio	Pressure*2	Pa	152	217	281	420	390		
Drive system					Belt drive system				
Air Filter	Туре			Long	life filter (anti-mould res	in net)			
Sound level *	1	dB(A)	52	56	60	65	66		
	Liquid (Flare)			9.5 (Brazing)			15.9 (Brazing)		
Piping connections	Gas (Flare)	mm	15.9 (Brazing)	19.1 (Brazing)	22.2 (Brazing)	28.6 (E	Brazing)		
connections	Drain	1	Rp1 (PS 1B internal thread)						

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp. of 27°CDB, 19°CWB, and outdoor temp. of 35°CDB.
- Couning: mooor iremp. or 27 (~U/b, 19°C/Ws, and outdoor temp. or 33°CU/B.
 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°CDB Equivalent piping length: 7.5 m, Level difference: 0 m.
 Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index.
 I: Sound level: measured when the cir discharge outlet duct (2 m) is attached (anechoic chamber conversion value). It increases by approximately 5 dB(A) when the plenum chamber is installed to deliver direct airflow.
 It is the external staffic pressure with standard pulley.

Clean Room Type Air Conditioner FXB(P)Q-P



Туре				Integrated outlet unit model		Separate outlet unit mode		
110051	Indoor unit		FXBQ40PVE	FXBQ50PVE	FXBQ63PVE	FXBPQ63PVE		
MODEL	Outlet unit			Integrated with the indoor unit				
Power supp	ply		1-phase, 220-240 V/220 V, 50/60 Hz					
Cooling capacity		Btu/h	15,400 19,100		24,200	24,200		
		kW	4.5	5.6	7.1	7.1		
Power consumption		kW	0.31	0.31	0.45	0.45		
Intake filter efficiency *1				70% by grav	rimetric method	-		
Outlet HEPA filter efficiency *2			99.97% by DOP method *5					
Indoor unit weight kg		kg	140 *3		185 *3	120 *6		
Casing				Galvanise	d steel plate			
A:	- //-///	m³/min	19.5/17.5		26,	/22.5		
Airflow rate	e (⊓/ t)	cfm	688/618		918/794			
Sound level	(H/L) *4	dB(A)		44	/42	30		
Dimensions	(H×W×D)	mm	492×1,78	38×1,000	492×1,788×1,300	492×1,078×1,300		
Outlet unit v	weight	kg	212	0.00	-	65 *3		
g g	Liquid (Flare)		Q	6.4	ø9.5	- 10		
Piping	Gas (Flare)	mm	Ø	12.7	ø15.9			
connections	Drain		PT1B					
Filter(Option)	HEPA filter		BAFH8	32A50	BAFF	182A63		
Panel	Ceiling intake type	Model	BYB82	A50C	BYB82A63C	BYB82A63CP		
(Option)	Floor-level intake type		BYB82	A50W	BYB82A63W	BYB82A63WP		

Note: Specifications are based on the following conditions:

- Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
- Capacity of indoor unit is only for reference. Actual capacity of indoor unit is based on the total capacity index. (See Engineering Data Book for details.)
- *1: An intake air filter is only attached to the ceiling intake type.

 *2: HEPA filter sold separately. The dust collection efficiency of HEPA filter is 99.97%. However, air may slightly leak around the filter when installing.
- *3: Weight including HEPA filter and panel.
- *4: Anechoic chamber conversion value under JIS B 8616 test conditions. Value usually increases slightly in practice due to surrounding conditions.
- *5: The clean room air conditioner does not support DOP testing (leak test) based on GMP standards (Standards for Manufacturing Control and Quality Control for Medical Devices) due to slight leakage at time of product installation.

*In the case of an installation in an operating theatre etc. where an air conditioner malfunction may have serious consequences, please build in redundancy with two or more



Outdoor Units

VRV X (Cooling Only)

MODEL			RXQ6ARY6 RXQ8ARY6 RXQ10ARY6 RXQ12ARY6			RXQ14ARY6	RXQ16ARY6			
Combination units		-		_	_	_	_			
Power supply			3-phase, 380–415 V, 50 Hz							
Cooling capacity		Btu/h	54,600	76,400	95,500	1,14,000	1,36,000	1,54,000		
		kW	16.0	22.4	28.0	33.5	40.0	45.0		
Capacity control %		25~100	20~100	13~100	12~100	11~100	10~100			
Casing colour	95				Ivory white	(5Y7.5/1)				
	Туре		Hermetically Sealed Scroll Type							
Compressor	No. of compressor		1	1	1	1	1	2		
Airflow rate	<u>.</u>	m³/min	119	1	78	191	257			
Dimensions (H	×W×D)	mm	1,657X930X765				1,657X1,240X765			
Machine weig	ht	kg	16	55	12	75	220	260		
Sound level		dB(A)	56	56	57	59	60	60		
Operation range	Cooling	°CDB			10 -	- 49				
n. (Туре				R4	10A				
Refrigerant	Charge	kg	5.	9	6.7	6.8	7.4	8.2		
Piping	Liquid	mm		ø 9.5			Ø 12.7			
connections	Gas	mm	øı	9.1	ø 22.2		ø 28.6			

56

- Note: Specifications are based on the following conditions:
 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0
 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Cooling Only)

MODEL			RXQ18ARY6	RXQ20ARY6	RXQ22ARY6	RXQ24ARY6		
			8—8	_	RXQ10ARY6	RXQ12ARY6		
Combination u	nits		1-3	_	RXQ12ARY6	RXQ12ARY6		
			1-1	_		_		
Power supply			3-phase, 380–415 V, 50 Hz					
Cooling capac	itv	Btu/h	1,71,000	1,91,000	2,10,000	2,29,000		
copuc	,	kW	50.0	56.0	61.5	67.0		
Capacity contr	ol	%	10~100	7~100	6~	100		
Casing colour				Ivory white	(5Y7.5/1)			
Compressor No. of compres	Туре			Hermetically Sec	aled Scroll Type			
	No. of compressor		2	2	1+1	1+1		
Airflow rate		m³/min	257	297	178+191	191+191		
Dimensions (H	×W×D)	mm	1,657X1,	,240X765	(1,657X930X765)+(1,657X930X765)			
Machine weig	nt	kg	260	285	175+	175		
Sound level	72	dB(A)	61	65	61	62		
Operation range	Cooling	°CDB	,s	10 ~	49			
	Туре			R41	0A			
Refrigerant	Charge	kg	8.4	11.8	6.7+6.8	6.8+6.8		
Piping	Liquid	mm		ø۱	5.9			
connections	Gas	mm		ø 28.6		ø 34.9		

- Note: Specifications are based on the following conditions:
 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.



Outdoor Units

VRV X (Cooling Only)


	MODEL		RXQ26ARY6	RXQ28ARY6	RXQ30ARY6	RXQ32ARY6	RXQ34ARY6	RXQ36ARY6	
	1500555		RXQ12ARY6	RXQ12ARY6	RXQ12ARY6	RXQ14ARY6	RXQ16ARY6	RXQ18ARY6	
Combination units		RXQ14ARY6	RXQ16ARY6	RXQ18ARY6	RXQ18ARY6	RXQ18ARY6	RXQ18ARY6		
		_	_	_	_	_	_		
Power supply			3-phase, 380–415 V, 50 Hz						
Cooling capacity		Btu/h	2,47,000	2,68,000	2,85,000	3,05,000	3,24,000	3,41,000	
		kW	73.5	78.5	83.5	90	95.0	100	
Capacity control %		6~100	5~100	5~100	5~100	4~100	5~100		
Casing colour					Ivory white	(5Y7.5/1)			
	Туре		Hermetically Sealed Scroll Type						
Compressor	No. of compressor		1+1	1+2	1+2	1+2	2+2	2+2	
Airflow rate	1	m³/min	191+257	191+257	191+257	257+257	257+257	257+257	
Dimensions (H	×W×D)	mm	,				{1,657X1,240X765}+{1,657X1,240X765}		
Machine weig	ht	kg	175+220	175+	260	220+260	260+	260	
Sound level		dB(A)		63			64		
Operation range	Cooling	°CDB			10 -	- 49			
	Туре	-			R41	10A			
Refrigerant	Charge	kg	6.8+7.4	6.8+8.2	6.8+8.4	7.4+8.4	8.2+8.4	8.4+8.4	
Piping	Liquid	mm	ø 19.1	ø 19.1	ø 19.1	ø 19.1	ø 19.1	ø 19.1	
connections	Gas	mm	ø 34.9	ø 34.9	ø 34.9	ø 34.9	ø 34.9	ø 41.3	

58

- Note: Specifications are based on the following conditions:
 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Cooling Only)

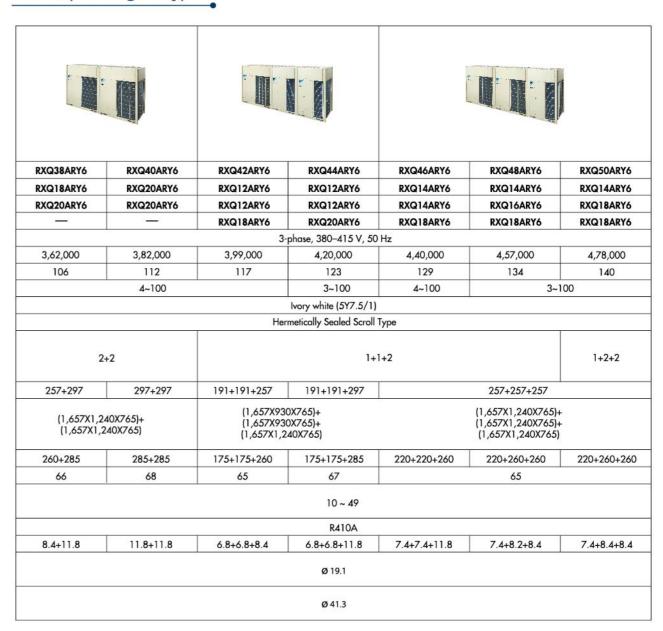

- Note: Specifications are based on the following conditions:
 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.



Outdoor Units

VRV X (Cooling Only)

	MODEL		RXQ52ARY6	RXQ54ARY6	RXQ56ARY6	RXQ58ARY6	RXQ60ARY6		
			RXQ16ARY6	RXQ18ARY6	RXQ18ARY6	RXQ18ARY6	RXQ20ARY6		
Combination (units		RXQ18ARY6	RXQ18ARY6	RXQ18ARY6	RXQ20ARY6	RXQ20ARY6		
			RXQ18ARY6	RXQ18ARY6	RXQ20ARY6	RXQ20ARY6	RXQ20ARY6		
Power supply		CAS		3-phase, 380–415 V, 50 Hz					
Cooling capacity		Btu/h	4,95,000	5,12,000	5,32,000	5,53,000	5,73,000		
coomig capac	/	kW	145	150	156	162	168		
Capacity contr	rol	%		3~	100		2~100		
Casing colour			lvory	white (5Y7.5/1)	į.				
Compressor	Туре			Hermetico	ally Sealed Scroll	Туре			
	No. of compressor		2+2+2						
Airflow rate		m³/min	257+2	57+257		257+297+297			
Dimensions (H	×W×D)	mm	(1,657)	(1,657X1,240X765 + 1,657X1,240X765 + 1,657X1,240X765)					
Machine weig	ht	kg	260+26	60+260	260+260+285	260+285+285	285+285+285		
Sound level		dB(A)	65	66	68	69	70		
Operation range	Cooling	°CDB			10 ~ 49	· · · · · · · · · · · · · · · · · · ·			
D. ()	Туре				R410A				
Refrigerant	Charge	kg	8.2+8.4+8.4	8.4+8.4+8.4	8.4+8.4+11.8	8.4+11.8+11.8	11.8+11.8+11.8		
Piping	Liquid	mm			ø 19.1				
connections	Gas	mm			ø 41.3				

60

- Note: Specifications are based on the following conditions:
 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0 m.
 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.
 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Heat Pump)

	MODEL		RXYQ6ARY6	RXYQ8ARY6	RXYQ10ARY6	RXYQ12ARY6	RXYQ14ARY6	RXYQ16ARY6	
Combination units			_	_	_	_	_	_	
Power supply	Power supply				3-phase, 380–41	5 V, 50 Hz			
Cooling capac	rih.	Btu/h	54,600	76,400	95,500	1,14,000	1,36,000	1,54,000	
Cooling capacity		kW	16.0	22.4	28.0	33.5	40.0	45.0	
Heating capacity Btu/h		Btu/h	61,400	85,300	1,07,000	1,28,000	1,54,000	1,71,000	
kW		kW	18.0	25.0	31.5	37.5	45.0	50.0	
Capacity control %		%	25-100	20-100	13-100	12-100	11-100	10-100	
Casing colour	3				Ivory white (5	Y7.5/1)			
	Туре								
Compressor	No. of compressor		1				2		
Airflow rate		m³/min	119	1	78	191	257		
Dimensions (H	×W×D)	mm		1,657X93	00X765		1,657X1,	240X765	
Machine weig	ht	kg	11	80	11	95	20	65	
Sound level		dB(A)		56		7		0	
Operation	Cooling	°CDB			-5 -	- 49			
range	Heating	°CDB			-20 ~	15.5			
D.C:	Туре				R4	10A			
Refrigerant	Charge	kg	6.9	7.0	7.4	7.6	9.1	9.3	
Piping .	Liquid	mm		ø 9.5			ø 12.7		
connections	Gas	mm	øl	9.1	ø 22.2	ø 28.6			

- Note: Specifications are based on the following conditions:

 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.


 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.

 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.



Outdoor Units

VRV X (Heat Pump)

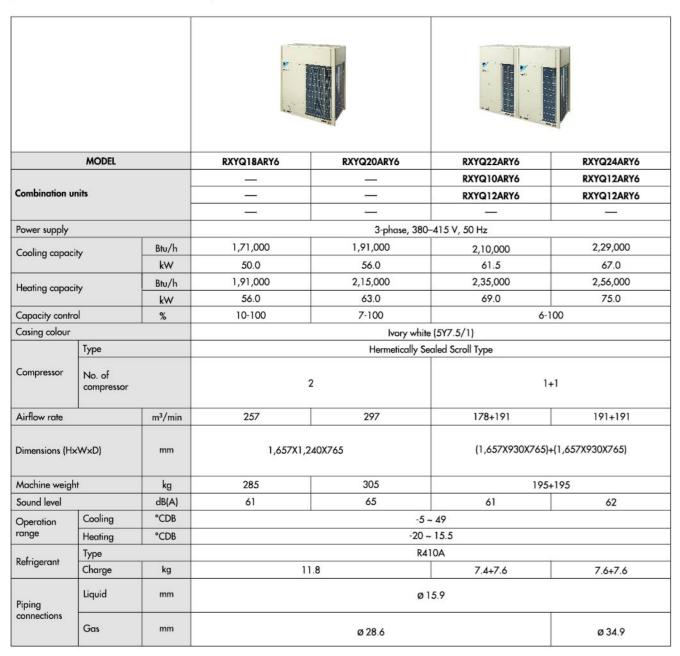

62

- Note: Specifications are based on the following conditions:


 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.

 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.

 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Heat Pump)

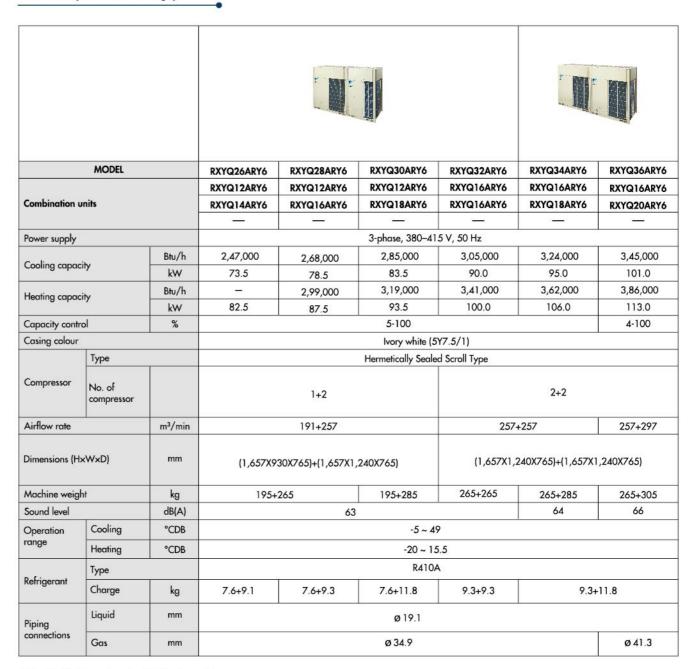

- Note: Specifications are based on the following conditions:

 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.

 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.

 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m. During actual operation, these values are normally somewhat higher as a result of ambient conditions.



Outdoor Units

VRV X (Heat Pump)

	MODEL		RXYQ38ARY6	RXYQ40ARY6	RXYQ42ARY6	RXYQ44ARY6		
	7110022		RXYQ18ARY6	RXYQ20ARY6	RXYQ12ARY6	RXYQ12ARY6		
Combination (units		RXYQ20ARY6	RXYQ20ARY6	RXYQ12ARY6	RXYQ12ARY6		
			_	_	RXYQ18ARY6	RXYQ20ARY6		
Power supply			3-phase, 380–415 V, 50 Hz					
Cooling capacity		Btu/h	3,62,000	3,82,000	3,99,000	4,20,000		
cooming cupac	7	kW	106.0	112.0	117.0	123.0		
Heating capac	rity	Btu/h	4,06,000	4,30,000	4,47,000	4,71,000		
ricaling capac	-117	kW	119.0	126.0	131.0	138.0		
Capacity contr	rol	%	4 - 100	3 - 100	4 - 100	3 - 100		
Casing colour		lvory white (5Y7.5/1)						
	Туре		Hermetically Sealed Scroll Type					
Compressor	No. of compressor		2+2		1+1+2			
Airflow rate		m³/min	257+297	297+297	191+191+257	191+191+297		
Dimensions (H	×W×D)	mm	{1,657X1,240X765}+ (1,657X1,240X765)		(1,657X930X765)+ (1,657X930X765)+ (1,657X1,240X765)			
Machine weig	ht	kg	285+305	305+305	195+195+285	200+200+325		
Sound level	-11	dB(A)	66	68	65	67		
Operation	Cooling	°CDB		-5 ~	- 49			
range	Heating	°CDB		-20 ~	15.5			
Refrigerant	Туре			R41	10A			
Konigerani	Charge	kg	11.8+11.8		7.6+7.6+11.8			
Piping	Liquid	mm		Ø 1	9.1			
connections	Gas	mm		Ø 4	11.3			

64

- Note: Specifications are based on the following conditions:

 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.


 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.

 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Outdoor Units

VRV X (Heat Pump)

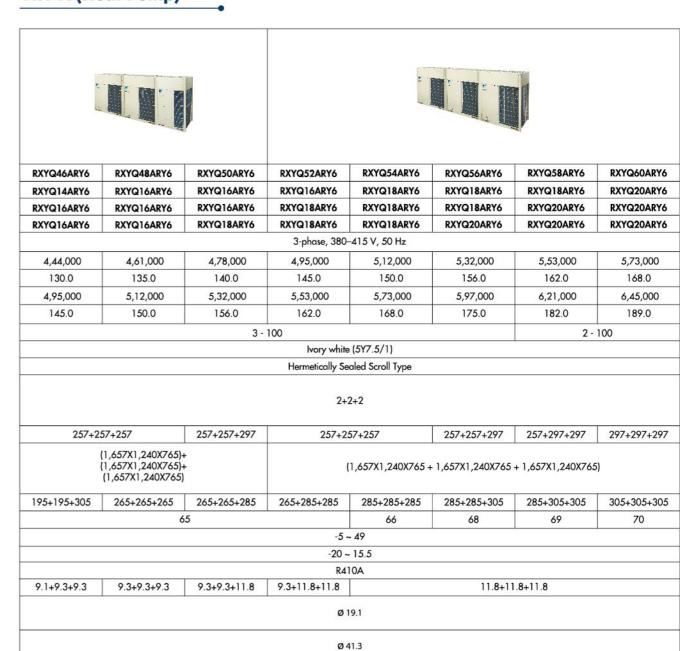

- Note: Specifications are based on the following conditions:

 Cooling: Indoor temp.: 27°CDB, 19°CWB, Outdoor temp.: 35°CDB, Equivalent piping length: 7.5 m, Level difference: 0.

 Heating: Indoor temp.: 20°CDB, Outdoor temp.: 7°CDB, 6°WB, Equivalent piping length: 7.5m, Level difference: 0m.

 Sound level: Anechoic chamber conversion value, measured at a point 1 m in front of the unit at a height of 1.5 m.

 During actual operation, these values are normally somewhat higher as a result of ambient conditions.

OUTDOOR UNIT COMBINATIONS





66



VRV X

HP	Capacity index	Model name	Combination for cooling only	Combination for heat pump	Outdoor unit multi connection piping kit *1	Total capacity index of connectable indoor units*2	Maximum number of connectable indoor units*2
6	150	RX(Y)Q6A	RXQ6A	RXYQ6A	_	75 to 195 (300)	9 (15)
8	200	RX(Y)Q8A	RXQ8A	RXYQ8A	1-	100 to 260 (400)	13 (20)
10	250	RX(Y)Q10A	RXQ10A	RXYQ10A	-	125 to 325 (500)	16 (25)
12	300	RX(Y)Q12A	RXQ12A	RXYQ12A	_	150 to 390 (600)	19 (30)
14	350	RX(Y)Q14A	RXQ14A	RXYQ14A	_	175 to 455 (700)	22 (35)
16	400	RX(Y)Q16A	RXQ16A	RXYQ16A	3-	200 to 520 (800)	26 (40)
18	450	RX(Y)Q18A	RXQ18A	RXYQ18A	· -	225 to 585 (900)	29 (45)
20	500	RX(Y)Q20A	RXQ20A	RXYQ20A		250 to 650 (1,000)	32 (50)
22	550	RX(Y)Q22A	RXQ10A + RXQ12A	RXYQ10A + RXYQ12A		275 to 715 (880)	35 (44)
24	600	RX(Y)Q24A	RXQ12A x 2	RXYQ12A x 2	BHFP22P1006	300 to 780 (960)	39 (48)
26	650	RX(Y)Q26A	RXQ12A + RXQ14A	RXYQ12A + RXYQ14A		325 to 845 (1,040)	42 (52)
28	700	RX(Y)Q28A	RXQ12A + RXQ16A	RXYQ12A + RXYQ16A		350 to 910 (1,120)	45 (56)
30	750	RX(Y)Q30A	RXQ12A + RXQ18A	RXYQ12A + RXYQ18A		375 to 975 (1,200)	48 (60)
32	800	RX(Y)Q32A	RXQ14A + RXQ18A	RXYQ16A + RXYQ16A		400 to 1,040 (1,280)	52 (64)
34	850	RX(Y)Q34A	RXQ16A + RXQ18A	RXYQ16A + RXYQ18A		425 to 1,105 (1,360)	55 (64)
36	900	RX(Y)Q36A	RXQ18A x 2	RXYQ16A + RXYQ20A		450 to 1,170 (1,440)	58 (64)
38	950	RX(Y)Q38A	RXQ18A + RXQ20A	RXYQ18A + RXYQ20A		475 to 1,235 (1,520)	61 (64)
40	1,000	RX(Y)Q40A	RXQ20A x 2	RXYQ20A x 2		500 to 1,300 (1,600)	
42	1,050	RX(Y)Q42A	RXQ12A x 2 + RXQ18A	RXYQ12A x 2 + RXYQ18A		525 to 1,365 (1,365)	
44	1,100	RX(Y)Q44A	RXQ12A x 2 + RXQ20A	RXYQ12A x 2 + RXYQ20A		550 to 1,430 (1,430)	
46	1,150	RX(Y)Q46A	RXQ14A + RXQ14A + RXQ18A	RXQ14A + RXQ18A	575 to 1,495 (1,495)		
48	1,200	RX(Y)Q48A	RXQ14A + RXQ16A + RXQ18A	RXYQ16A x 3		600 to 1,560 (1,560)	
50	1,250	RX(Y)Q50A	RXQ14A + RXQ18A + RXQ18A	RXYQ16A + RXYQ16A + RXYQ18A	BHED2201514	625 to 1,625 (1,625)	64 (64)
52	1,300	RX(Y)Q52A	RXQ16A + RXQ18A × 2	RXYQ16A + RXYQ18A × 2	A + RXYQ18A × 2	650 to 1,690 (1,690)	04 (04)
54	1,350	RX(Y)Q54A	RXQ18A × 3	RXYQ18A × 3]	675 to 1,755 (1,755)	
56	1,400	RX(Y)Q56A	RXQ18A × 2 + RXQ20A	RXYQ18A × 2 + RXYQ20A]	700 to 1,820 (1,820)	
58	1,450	RX(Y)Q58A	RXQ18A + RXQ20A × 2	RXYQ18A + RXYQ20A × 2]	725 to 1,885 (1,885)	
60	1,500	RX(Y)Q60A	RXQ20A × 3	RXYQ20A × 3]	750 to 1,950 (1,950)	

Note: *1 For multiple connection of 22 HP systems and above, the outdoor unit multi connection piping kit (separately sold) is required.

*2 Values inside brackets are based on connection of indoor units rated at maximum capacity, 200% for single outdoor units, 160% for double outdoor units, and 130% for triple outdoor units. Refer to page 17 for notes on connection capacity of indoor units.

OPTION LIST



VRV Indoor Units

Ceiling Mounted Cassette Round Flow & Round Flow With Sensing (Optional)

68

No.	Item			Туре	FXFSQ25A FXFSQ32A FXFSQ40A	FXFSQ50A FXFSQ63A FXFSQ80A	FXFSQ100A FXFSQ125A FXFSQ140A	
			Fresh white		BYCQ125EAF6 *			
		Standard panel	Black Fresh white Fresh white			BYCQ125EAK *		
1	Decoration	Designer panel 1				BYCQ125EAPF *		
	panel	Auto grille panel 2,3				BYCQ125EASF *		
		Ci	Fresh whit	e		BYCQ140EEF6 *		
	Sencing panel		Black			BYCQ125EEK *		
2	Cauling mater	المعادية والمساورة المارة	For usage	of 3-4-way flow	KDBH551C160			
2	Sealing material of air discharge outlet 4		For usage of 2-way flow		KDBH552C160			
3	Panel spacer				KDBP55H160FA			
			Chamber	Without T-duct joint	KDDP55B160 (Components: KDDP55C160-1, KDDP55B160-2)		DP55B160-2) *	
4	Fresh air inta	ke kit	type 5,6	With T-duct joint	KDDP55B160K (Components: KDDP55C160-1, KDDP55B16		DP55B160K2) *	
			Direct installation type 7		KDDP55X160A			
5	High-efficiency filter unit 9		(Colorimetric method 65%)		KAFP5	556C80	KAFP556C160	
3	(Including filte	er chamber)	(Colorimetric method 90%)		KAFP5	557C80	KAFP557C160	
6	Paulosament	placement high-efficiency filter 9,10 (Colorimetric method 65%)		KAFP5	552B8O	KAFP552B160		
0	kepiacemeni	nigh-emciency mier ***	(Colorimetric method 90%)		KAFP5	KAFP553B80 KAFP553B		
7	Filter chambe	r			KDDFP55C160			
8	Replacement	long-life filter			KAFP551K160			
9	Replacement long-life filter (Auto grille panel)			KAFP551H160				
10	Ultra long-life filter unit (Including filter cl		hamber) 9		KAFP55C160			
11	Replacement ultra long-life filter 9,10				KAFP55H160H			
12	Branch duct o	hamber ⁴			KDJP55C80		KDJP55C160	
13	Insulation kit	for high humidity 9,11			KDTP.	55K80	KDTP55K160	

- Note:

 1. When installing designer panel, body height (ceiling required dimension) is 42 mm higher than standard panel. Designer panel cannot operate 2 and 3 way flow.

 2. A dedicated wireless remote controller (BRC16A2) for the auto grille panel is included for lowering and raising the suction grille.

 3. When installing outo grille panel, body height (ceiling required dimension) is 55 mm higher than standard panel.

 4. Circulation airflow is not available with this option.

 5. When installing a fresh air intake kit (chamber type), two air outlet corners are closed.

 6. It is recommended that the volume of outdoor air introduced through the kit is limited to 10% of the maximum airflow rate of the indoor unit. Introducing higher quantities will increase the operating sound and may also influence temperature sensing.

 7. The volume of fresh air for direct installation type is approximately 1% of the indoor unit airflow. The chamber type is recommended when more fresh air is necessary.

 8. Please arder using the names of both components instead of set name.

 9. This option cannot be installed to designer panel and outo grille panel.

 10. Filter chamber is required.

 11. Please use in case temperature/humidity inside ceiling may get over 30°C, 80% RH.

 *These panels do not contain the sensing function.

VRV Indoor Units

Ceiling Mounted Cassette (Compact Multi Flow) Type

No.	Item	Туре	FXZQ20M	FXZQ25M	FXZQ32M	FXZQ40M	FXZQ50M	
1	Decoration panel				BYFQ60B3W1			
2	Sealing material of air di	ischarge outlet	KDBH44BA60					
3	Panel spacer		KDBQ44BA60A					
4	Replacement long-life filter		KAFQ441BA60					
5	Fresh air intake kit	Direct installation type			KDDQ44XA60			

Ceiling Mounted Cassette (Double Flow) Type

No.	İtem		Туре	FXCQ25A	FXCQ32A FXCQ40A	FXCQ50A	FXCQ63A	FXCQ80A	FXCQ125A
1	Decoration panel			BYBO	Q40CF	BYBCQ	63CF	BYBCQ	125CF
	Filter related	11:1 15: 11:41	65%	KAFF	532B50	KAFP532B80		KAFP532B160	
		High efficiency filter*	90%	KAFF	533B50	KAFP53	3B80	KAFP53	3B160
2		Filter chamber bottom suction Long-life replacement filter		KDDFP53B50		KDDFP53B80	KDDFP53B160	3B160	
				KAFP531B50 KAFP531		1B 8 0	KAFP53	1B160	
3	Remote controller	Wireless	H/P			BRC7M65			
4	Navigation remote controller (Wired remote controller)			BRC1E63					

Note: * 1 Filter chamber is required if installing high efficiency filter.

Ceiling Mounted Cassette Corner Type

No.	Item Type	FXEQ20AV36	FXEQ25AV36	FXEQ32AV36	FXEQ40AV36	FXEQ50AV36	FXEQ63AV36
1	Decoration Panel	BYEP40AW16				BYEP63	AW16

Slim Ceiling Mounted Duct Type (700 mm width type)

No.	Item Туре	FXDQ20PD	FXDQ25PD	FXDQ32PD
1	Insulation kit for high humidity		KDT25N32	

Slim Ceiling Mounted Duct Type (900/1,100 mm width type)

No.	Item Type	FXDQ40ND	FXDQ50ND	FXDQ63ND
1	Insulation kit for high humidity	KDT2	5N50	KDT25N63

High Static Ceiling Mounted Duct Type

No.	Item	Туре	FXMQ20P FXMQ25P FXMQ32P	FXMQ40PBV36	FXMQ50PBV36 FXMQ63PBV36 FXMQ80PBV36	FXMQ100PBV36 FXMQ125PBV36 FXMQ140PBV36
1	Drain pump kit			-		***
2	High efficiency filter	65%	KAF372AA36	KAF372AA56	KAF372AA80	KAF372AA160
_	nigh emiciency hiter 90%	90%	-	KAF373AA56	KAF373AA80	KAF373AA160
3	Filter chamber		-	BDDF37A40~6	BDDF37A80~6	BDDF37A140~6
4	Long-life replacement filter		822	KAF371AA56	KAF371AA80	KAF371AA160
5	Long-life filter chamber kit		-	KAF375AA56	KAF375AA80	KAF375AA160
		White	KTBJ25K36W	KTBJ25K56W	KTBJ25K80W	KTBJ25K160W
6	Service panel	Fresh white	KTBJ25K36F	KTBJ25K56F	KTBJ25K80F	KTBJ25K160F
	Brown		KTBJ25K36T	KTBJ25K56T	KTBJ25K80T	KTBJ25K160T
7	Air discharge adaptor		KDAJ25K36A	KDAJ25K56A	KDAJ25K71A	KDAJ25K140A
8	Suction Flange		KDF37AA36	BDF37A40~6	BDF37A80~6	BDF37A140~6

OPTION LIST



VRV Indoor Units

Ceiling Suspended Type

No.	Item Туре	FXHQ32MA	FXHQ63MA	FXHQ100MA
1	Drain pump kit	KDU50N60VE	KDU50N125VE	
2	Replacement long-life filter (Resin net)	KAF501DA56	KAF501DA80 KAF501DA11	
3	L-type piping kit (for upward direction)	KHFP5MA63	KHFP5MA160	

Floor Standing Type/Concealed Floor Standing Type

No.	item Type	FXLQ32MA/FXNQ32MA	FXLQ50MA/FXNQ50MA	FXLQ63MA/FXNQ63MA
1	Long-life replacement filter	KAFJ361K45	KAFJ361K71	

Mid Static Ceiling Mounted Duct Type

No.	Item	ltem Type		Duct Type		
No.				FXMQ40ARV16, FXMQ50ARV16	FXMQ63ARV16, FXMQ80ARV16, FXMQ100ARV16	
1	High Efficiency Filter	65%	Туре	KAF372AA56	KAF372AA80	
2	Filter Chamber		Туре	BDDF37A40~6	BDDF37A80~6	
3	Long-Life Replacement Filter		Туре	KAF371AA56	KAF371AA80	
,	Suction Flange	-C Fl		BDF37A40~6	BDF37A80~6	
4	Suction Fidinge			KTBJ25K56W	KTBJ25K80W	
-				KTBJ25K56F	KTBJ25K80F	
5	Service Panel			KTBJ25K56T	KTBJ25K8OT	
6	Air Discharge Adapater			KDAJ25K56A	KDAJ25K71A	

Floor Standing Duct Type

No.	Iter	m			Туре	FXVQ125N	FXVQ200N	FXVQ250N	FXVQ400N	FXVQ500N
1	Т	Replacement long life filter			KAFJ261M140	KAFJ261M224	KAFJ261M280	KAFJ261N450	KAFJ261N560	
2		Ultra long-life filter					-		KAFSJ9A400	KAFSJ9A560
3		Filter chambe		er for high	65%	KDDF-92A140	KDDF-92A200	KDDF-92A280	KDDF-92A400	KDDF-92A560
4] _		efficiency filte	r*1	90%	KDDF-93A140	KDDF-93A200	KDDF-93A280	KDDF-93A400	KDDF-93A560
5	cţio	Front suction filter	Front suction	base flange		KD-9A140	KD-9A200	KD-9A280	KD-9A400	KD-9A560
6	Sol	chamber for High	Suction grille			KDGF-9A140	KDGF-9A200	KDGF-9A280	KDGF-9A400	KDGF-9A560
7	and	efficiency filter Replacement	Long-life filter *	'3	KAF-91B140	KAF-91B200	KAF-91B280	KAF-91B400	KAF-91B560	
8	ge		filter *2	High efficiency	65%	KAF-92B140	KAF-92B200	KAF-92B280	KAF-92B400	KAF-92B560
9	charge			filter	90%	KAF-93B140	KAF-93B200	KAF-93B280	KAF-93B400	KAF-93B560
10	Ď.	Plenum chamber *4	la in the same of			KPCJ140A	KPC5J	KPC8J	KPCJ400A	KPC15JA
11		Pulley for plenum ch	namber *4			KPP8JA	KPP9JA	KPP10JA	-	-
12		Fresh air intake kit				KD106D10	20	KDFJ90	06A560	
13		Rear suction kit				KDFJ905A140	KDFJ905A200	KDFJ905A280	KDFJ905A400	KDFJ905A560
14		Discharge grille for plenum side				KD101A10		KD10	1A20	
15	Wo	ood base			KKWJ9A140	KWF1G5P	KWF1G8P	KKWJ9A400	KWF1G15	
16	Vik	oration isolating frame	e			K-ABSG1406A	K-ABSG1407A	K-ABSG1408A	K-ABSG1409A	K-ABSG1410A

- *1 A front suction base flange and suction grille are required (option).
 *2 A filter chamber for high efficiency is required (option).
 *3 Different from the filter attached as standard.
 *4 Use the plenum chamber and pulley for plenum chamber in combination.

Clean Room Air Conditioner

No.	Item	Туре	FXBQ40PVE	FXBQ50PVE	FXBQ63PVE	FXBPQ63PVE
1	Outlet unit			14		BAF82A63
2	Filter	HEPA filter	BAFH82A50 BAFH8		82A63	
3	D 1	Ceiling intake type	BYB82	A50C	BYB82A63C	BYB82A63CP
4	Panel Floor-level intake type		BYB82	A50W	BYB82A63W	BYB82A63WP
5	Outside air intake duct flange			KDFJ8	32A80	-

Outdoor Units

VRV X

Optional Accessories		RX(Y)Q6ARY6 RX(Y)Q8ARY6 RX(Y)Q10ARY6	RX(Y)Q12ARY6	RX(Y)Q14ARY6 RX(Y)Q16ARY6
Distributive piping	REFNET header	KHRP26M22H, (Max. 4 branch) KHRP26M33H (Max. 8 branch)	KHRP26M22H, KHRP26M33H, KHRP26M72H (Max. 4 branch) (Max. 8 branch) (Max. 8 branch)	
	REFNET joint	KHRP26A22T KHRP26A33T	KHRP26A22T, KHRP2	6A33T, KHRP26A72T


Optio	onal Accessories	RX(Y)Q18ARY6 RX(Y)Q20ARY6
Distributive	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H (Max.4 branch) (Max.8 branch) (Max.8 branch)
piping	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T

Optional Accessories		RX(Y)Q22ARY6	RX(Y)Q24ARY6	RX(Y)Q26ARY6 RX(Y)Q28ARY6 RX(Y)Q30ARY6 RX(Y)Q32ARY6	RX(Y)Q34ARY6 RX(Y)Q36ARY6 RX(Y)Q38ARY6 RX(Y)Q40ARY6
Distributive piping	KHRP26M22H (Max.4 branch), KHRP26M33H (Max.8 branch), KHRP26M72H (Max.8 branch),			.KHRP26M33H, KHRP26M72H, (Max.8 branch) (Max.8 branch)	
	REFNET joint	KHRP26A22T, KHRP26M33T, KHRP26M72T,	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T		KHRP26A73T
Pipe size reducer		— KHRP26M73TP, KHRF		KHRP26M73TP, KHRP26M73HP	
Outdoor unit connection piping kit		BHFP22P1006			

Optional Accessories		RX(Y)Q42ARY6 RX(Y)Q44ARY6	RX(Y)Q46ARY6 RX(Y)Q48ARY6 RX(Y)Q50ARY6 RX(Y)Q52ARY6 RX(Y)Q52ARY6 RX(Y)Q56ARY6 RX(Y)Q56ARY6 RX(Y)Q58ARY6 RX(Y)Q60ARY6		
Distributive	REFNET header	KHRP26M22H, KHRP26M33H, KHRP26M72H, KHRP26M73H (Max.4 branch) (Max.8 branch) (Max.8 branch) (Max.8 branch)			
piping	REFNET joint	KHRP26A22T, KHRP26A33T, KHRP26A72T, KHRP26A73T			
Pipe size reducer		KHRP26M73TP,	KHRP26M73HP		
Outdoor unit o	onnection piping kit	BHFP2	BHFP22P1516		





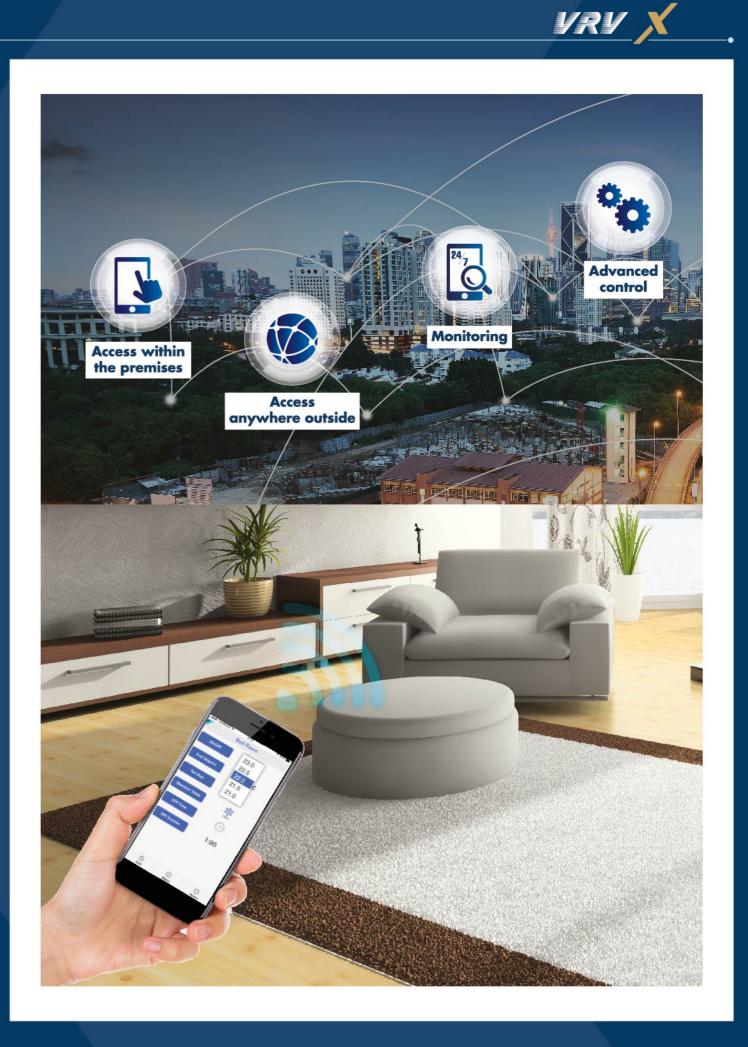

SMART CONTROL FOR RESIDENTIAL OVERVIEW





Access within the premises

Daikin Smart Control SVM Series provides the ability of centralised control for Daikin VRV air conditioners throughout the home with a smartphone. Homeowners can control all of the core control functions in Daikin air conditioning system effortlessly from one room to another.

74



Access anywhere outside

With Daikin Smart Control SVM Series, the home temperature can be controlled from anywhere, and homeowners can always return from work or vacation to a comfortable cooling home. This also takes the pressure off homeowners on forgetting to switch off the air conditioners when away.



Advanced control

Daikin Smart Control SVM Series communicates with all of Daikin VRV air conditioners, allowing homeowners to access the core control functions on a smartphone, including temperature set points, operation mode, fan speed, airflow direction and error notification.



Monitoring

Homeowners can enjoy the peace of mind and convenience of monitoring air conditioners with Daikin Smart Control SVM Series from a smartphone.

For medium size apartments, condominiums and landed properties

- Connect up to 16 (32*) Indoor Units
- Control and monitor VRV system from smartphone

*Additional modbus adaptor (DTA116A51) is required



System Architecture

- SVM
- VRV Systems
- DTA116A51 (Modbus Card)
- Router
- Smartphone

DAIKIN Supplied Equipments

Model	Items
SVM	Application Controller
DTA116A51	MODBUS Adaptor

Note: wi-fi connection should be in customer scope

Category	Function	Detail	
Access security	User login	User name, password	
	Device registration Registered device (Smartphone only) can be accessed through the internet		
Main screen	Status monitoring Manual operation	On/Off, Set point, Operation mode, Fan step, Flap, Error code On/Off, Set point, Operation Mode, Fan step, Flap	
Automatic control	Off timer	One time off timer on/off	
System setting	Language	English	
	Password setting Available		
	User administration	Add/Modify/Delete user, Set User name, Password, Accessible points	



Recovery differential

-2 - -8°C

Individual Control Systems for VRV Indoor Units

Navigation remote controller (Wired remote controller) (Optional)

Fr 12:00

BRC1E63 & BRC1F61 (Only for FXEQ Series)

Clear display

Dot matrix display

A combination of fine dots enables various icons. Large text display is easy to see.

Backlight display

Backlight display helps operating in dark rooms.

Simple operation

Large buttons and arrow keys

Large buttons and arrow keys enable easy operation. Basic setting such as fan speed and temperature can be intuitively operated. For other settings, just select the function from the menu list.



76



Guide on display

The display gives an explanation of each setting for easy operation.

Energy saving

Set point range set

- Saves energy by limiting the min. and max. set temperature.
- Avoids excessive cooling or heating.
- . This function is convenient when the remote controller is installed at a place where any number of people may operate it.

22°C


Set point auto-reset

- Even if the set temperature is changed, it returns to the preset temperature after a preset period of time.
- Period selectable from 30 min/60 min/90 min/120 min.



Off timer

- Turns off the air conditioner after a preset period of time.
- Period can be preset from 30 to 180 minutes in 10-minute increments

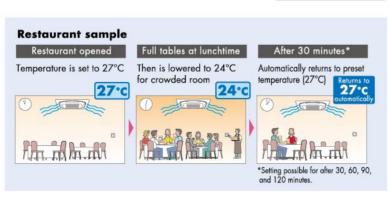

Individual Control Systems for VRV Indoor Units

Convenience


Setback (default:OFF)

Maintains the room temperature in a specific range during an unoccupied period by temporarily starting air conditioner that was turned OFF.

Ex) Setback temperature Cooling : 35°C Recovery differential Cooling : -2°C When the room temperature goes above 35°C, the air conditioner starts operating in Cooling automatically. When room temperature reaches 33°C, the air conditioner turns OFF.

Weekly schedule

- Five actions per day can be scheduled for each day of the week
- The holiday function will disable schedule timer for the days that have
- Three independent schedules can be set. (e.g. summer, winter, mid-season)




Setback

temperature

33-37°C


Cooling

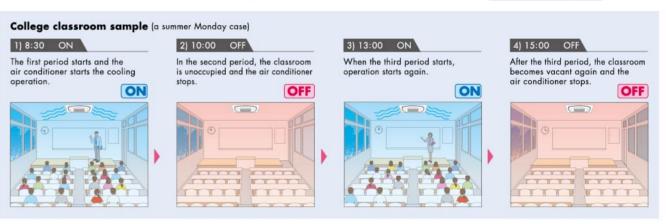

Comfort

• Individual airflow direction (*1)

Airflow direction of each of the four air outlets can be controlled individually. (Positions 0 to 4, Swing, and No individual setting are selectable.)

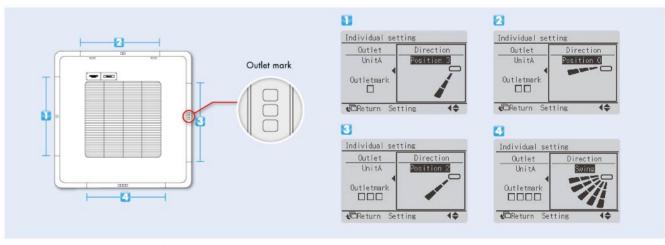

Auto airflow rate (*2)

Airflow rate is automatically controlled in accordance with the difference between room temperature and set temperature.

- *1 Only available for VRV 4-Way Flow Ceiling Suspended type FXUQ-A series
 *2 Only available for VRV 4-Way Flow Ceiling Suspended type FXUQ-A series



Individual Control Systems for VRV Indoor Units

Wired remote controller (Option)



Control of Cool/Heat

Digital display lets you set temperature in 1°C Units.

controller of the indoor unit

• Displays current airflow, swing, temperature operating mode and timer settings.

- *Easier to read because LCD screen is larger.
- Lets you individually programme by timer the respective times for operation start and stop within a maximum of 72 hours.
- Equipped with a thermostat sensor in the remote controller that makes possible more comfortable room temperature control.
- Enables you to select cool/heat/fan operation mode with the indoor remote controller of your choice without using the cool/heat selector.
- Constantly monitor malfunctions in the system for a min. of 40 items, and is equipped with a self-diagnosis function that lets you know through message immediately when a malfunction occurs.

The wired remote controller supports a wide range of control functions.

In all the series of VRV, cool/heat changeover in the same refrigerant circuit can be changed by the remote

· Lets you carry out various field setting by remote

78

- Enables you to select the ventilation mode and the volume of the HRV.
- The rubber switch and the oil-resisting resin casing have been adopted for durability.
- When the auto-swing function is not available, the message, THIS FUNCTION IS NOT AVAILABLE is displayed when the wind direction adjustment button is pressed.

Wireless remote controller (Option)



*Refer to page 90 for the name of each model

- Then same operation mode and setting as with wired remote controllers are possible. *Individual airflow direction, auto air-flow rate and sensing sensor control can be set only via wired remote controller BRC1E62. Cannot be set via other remote controllers.
- A compact signal receiver unit (separate type) to be mounted into wall or ceiling is included
- A signal receiver unit (installed type) for a Ceiling Mounted Cassette (Round Flow, Compact Multi Flow, Double Flow) type, Ceiling Suspended Type and Wall Mounted type is mounted into the Indoor unit.



Individual Control Systems for VRV Indoor Units

Signal receiver unit can be installed on the panel. Ex. Ceiling Mounted Cassette (Round Flow) type



Simplified remote controller (Option)





(For hotel use) (BRC3A61)

- The remote controller has centralised its frequently used operation selector and switches (in/off, operation mode, temperature setting and airflow volume), making itself suitable for use in hotel room or conference
- The exposed type remote controller is fitted with a thermostat sensor



The concealed type remote controller smartly fits into a night or console panel in a hotel room.

	changeover	controller of the Indoor unit.		
			ment d to the l control. Group control One remote coperation of resame time.	rol ontroller can control the nax. 16 indoor units at the
	* *	Remote Controller	controller	Indoor unit
		Remote		
		Remote controller Remote controller	Remote	Forced OFF input leat Reclaim / rentilator Remote controller
	1 2		3	4
3	The indoor unit can be connected by the two remote controller, for example one in the room and the other one in the control room, which can control the operation of indoor unit freely. (The last command has a priority.) Of course, the group control by two remote controllers is also possible.	install the remote controllers for the different	The operation of Heat Reclaim ventilator can be controlled by the remote controller of the indoor unit. Of course, the remote controller can display the time to clean the filter.	4 Expansion of system control The system can be expanded to add several controllers, such as BMS, Forced OFF input and etc.

Wide variation of remote controller for VRV indoor unit


rooms

	FXFQ-AVM FXFQ-5	FXZQ	FXCQ	FXUQ	FXEQ	FXDQ	FXMQ	FXHQ	FXAQ	FXL(N)Q	FXVQ
Navigation remote controller (Wired remote controller) BRC1E63	•		•	•	•	•	•	•	•	•	
Wired remote controller (BRC1C62)				•		•	•		•		r.
Wireless remote controller*	•		•	•	0		•	•		•	
Simplified remote controller (Exposed type) (BRC2C51)						•	•			•	
Simplified remote controller (Concealed type: for HOTEL use) (BRC3A61)						•	•			•	



Centralised Control Systems for VRV Indoor Units

- Up to 64 groups of indoor units (128 units) can be centrally
- Optional controllers for centralised control can be combined freely, and system can be designed in accordance with building scale and purpose.
- · System integrated with various air conditioning peripheral equipment such as Heat Reclaim Ventilator is easy.
- · Wiring can be run up to a length of 2km, and adapts easily to large-scale system expansion.

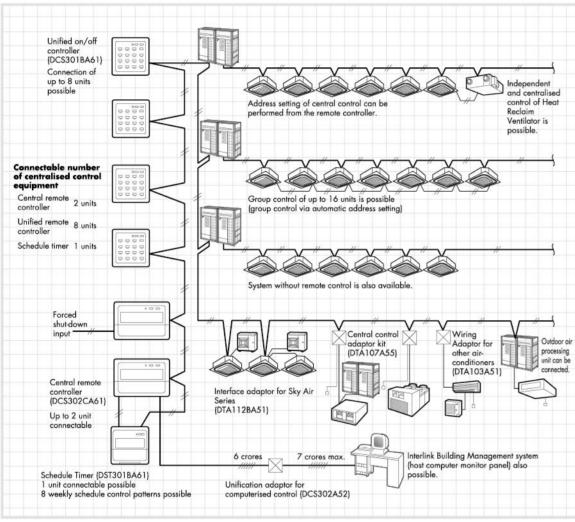

· Certain indoor units limit the functions of some control systems

Centralised Control Systems for VRV Indoor Units

Residential remote controller (Optional)



DC\$303A51

Max. 16 groups of indoor units can be easily controlled

- with the large LCD Panel. • Max. 16 group (128 indoor units) controllable
- · Backlight and large LCD panel for easy readability.
- ON/OFF, temperature setting and scheduling can be controlled individually for indoor units.
- · All indoor units can be turned on or off at once with "ALL" button.

Central remote controller (Optional)



DCS302CA61

Max. 64 groups(zones) of indoor units can be controlled individually same as

- Max. 64 group (128 indoor units) controllable.
- Max. 128 group (128 indoor units) are controllable by using 2 central remote controllers, which can be controlled from 2 different places.
- · Zone control.
- · Malfunction code display.
- . Max. wiring length 1,000m (Total: 2,000m).
- · Connectable with Unified ON/Off controller, schedule timer and BMS system
- Airflow volume and direction can be controlled individually for indoor units in each group operation.
- Ventilation volume and mode can be controlled for Heat Reclaim Ventilator.
- Up to 4 ON/OFF pairs can be set per day by connecting a schedule timer.

Unified ON/OFF controller (Optional)



DC\$301BA61

Max. 16 groups of indoor units can be operated simultaneously/individually.

- Max. 16 group (128 indoor units) controllable.
- 2 remote controllers can be used to control 2 different places.
- · Operating status indication (Normal Operation, Alarm).
- · Centralised control indication.
- Max. wiring length 1,000m (Total: 2,000m).
- Compact size casing (Thickness: 16mm).
- Connectable with Central Remote controller, Schedule timer and BMS system.

Schedule timer (Optional)



DST301BA61

Max. 128 indoor units can be operated as programmed schedule.

- Max. 128 indoor units controllable.
- When used in combination with a central remote controller, a maximum of 8 weekly schedule patterns can be set, while the central controller can be used to select desired zones. Up to 2 ON/OFF pairs can be set per day.
- Max. \$8 hours back-up power supply.
- Max. wiring length 1,000m (Total: 2,000m).
- · Compact size casing (Thickness: 16mm).
- Connectable with Central Remote controller, Unified ON/OFF controller and BMS system.

^{*}For residential use only. Cannot be used with other centralised control equipment.



Advanced Control Systems for VRV Indoor Units

Intelligent Manager

One touch selection enables flexible control of equipment in a building.



DCM601A51

Various types of equipment in a building can be controlled by a single controller.

Individual air-conditioning control

The flexible control achieved by the VRV system precisely meets different air conditioning needs in each room (e.g. offices, conference rooms, hotel rooms).







DALI-compatible

DALI-compatible LED lighting systems can be controlled and monitored. Lighting control is enhanced through an interlock function with air conditioners and other functions.





Air conditioning control for large spaces

Air handling units can also be controlled. Large spaces, such as entrance halls and shopping malls, can be easily controlled to ensure comfort.





Building equipment control

Various types of equipment other than air conditioners, including ventilators, fans, and pumps, can also be controlled.

82





For Energy Saving & Comfort

Intelligent Touch Manager maximises the advantages of VRV features

Intelligent Touch Manager is an advanced multi-zone controller that provides the most cost-effective way to control and monitor the Daikin VRV system.

The 10.4" LCD touch screen is easy to use with three different screen views to include the floor plan layout view, icon view and list view and menus for system configurations.


It is also easy to use with standardised remote Web Access from your PC.

It can manage a total of 650 management points consisting of up to 512 Daikin indoor unit groups


(up to 1024 indoor units) along with building equipment control / monitoring with Digital Inputs / Output

(Di/Dio), Analog Inputs / Output (Ai/Ao) and Pulse input (Pi) optional devices.





Working hours (Scheduled) Turn ON again by remote controller, forgot to turn OFF, and left. Saved power consumption by control system 8:00 17:00 18:30 8:00 Turn OFF as scheduled Automatically turn OFF to cut wasteful operation





Advanced Control Systems for VRV Indoor Units

In addition to switching lights on and off, advanced lighting control, such as illuminance adjustment, can be achieved

Lighting control (Optional)

Connection to DALI - compatible lighting control system

Simple wiring (daisy chain) enables management of LED lighting by the intelligent Touch Manager.

Various air conditioning and lighting control is enabled through the interlock with occupancy sensors and illuminance sensors.

DALI-compatible Please contact your local sales office for details.

Air conditioning and lighting for which power consumption is high can be

efficiently controlled to promote energy conservation and cost reduction!


84

Lighting control achieved by the intelligent Touch Manager

[Operation]

- · Switch-on/switch-off operation
- Illuminance (1-100%) control
- Various illuminance patterns can be registered
- Registered pattern can be selected from intelligent Touch Manager

- Switch-on/switch-off status monitoring
- Lighting abnormality monitoring
- Illuminance monitorina
- DALI occupancy sensor monitoring DALI illuminance sensor monitoring

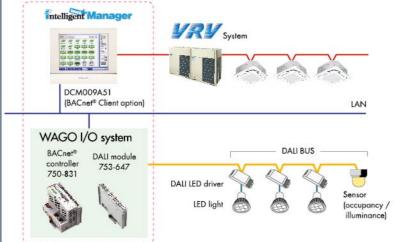

[Overview of control]

- Up to 5 DALI modules can be connected to a single BACnet® controller.
- Up to 64 DALI LED drivers (64 addresses) can be connected to a single DALI module.
- 64 DALI addresses can be freely assigned to up to 16 groups using a single DALI module.

(Each group corresponds to a management point of the intelligent Touch Manager.)

- Up to 16 scenes can be set to a single DALI
- Up to 12 sensors (occupancy, illuminance) can be connected to a single DALI module.
- DALI BAS simplifies wiring and setting work by daisy chain wiring and automatic address setting

Easy maintenance and energy saving by lighting control

Case 1

Switch-on / switch-off and illuminance are controlled based on a schedule to cut wasteful power consumption.

Failing to switch




Optimal illuminance reduces energy

Case 2

Occupancy sensors are used to eliminate both wasteful lighting and air conditioning.


When a room is unoccupied, the air conditioning stops and the lighting is switched off.



Case 3

Lighting abnormalities (e.g. burned-out bulbs) can be checked on the intelligent Touch Manager screen.

Lighting maintenance becomes easier and



Tenant Management (PPD Option)

Reporting the power consumption of **VRV** system for each tenant


With the PPD function, power consumption can be calculated for each indoor unit (Optional)

The energy consumption is proportionally calculated for each indoor unit. The data can be used for energy management and calculation of air conditioning usage fees for respective tenants.

Operational information of individual indoor units are monitored, based on distribution of power consumption of outdoor units.

Daikin's PPD keeps track of power distribution for each indoor unit. It performs air conditioning billing calculations quickly and automatically.

It is easy to output PPD data. PPD data is output in CSV format to a PC or USB memory device and can be freely processed and managed.

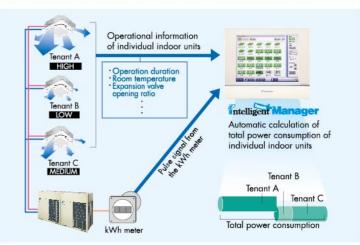

*PPD (Power Proportional Distribution) is Daikin's proprietary calculation method.

Air conditioning bills can be issued by one click

Electricity bills can be easily calculated for each tenant (Optional)

The power consumption of VRV controlled by the intelligent Touch Manager can be easily managed for each tenant using a PC. The electricity bill settings facilitate billing work through easy calculation and issuance of VRV electricity bills.

[Main functions]


- Register tenants
- Set the electricity unit price for 5 time zones
- Calculate power consumption and electricity charge for each tenant
 Show aggregation results in the specified period for each tenant
- · Output the results (Printout and CSV file)





Advanced Control Systems for VRV Indoor Units

86

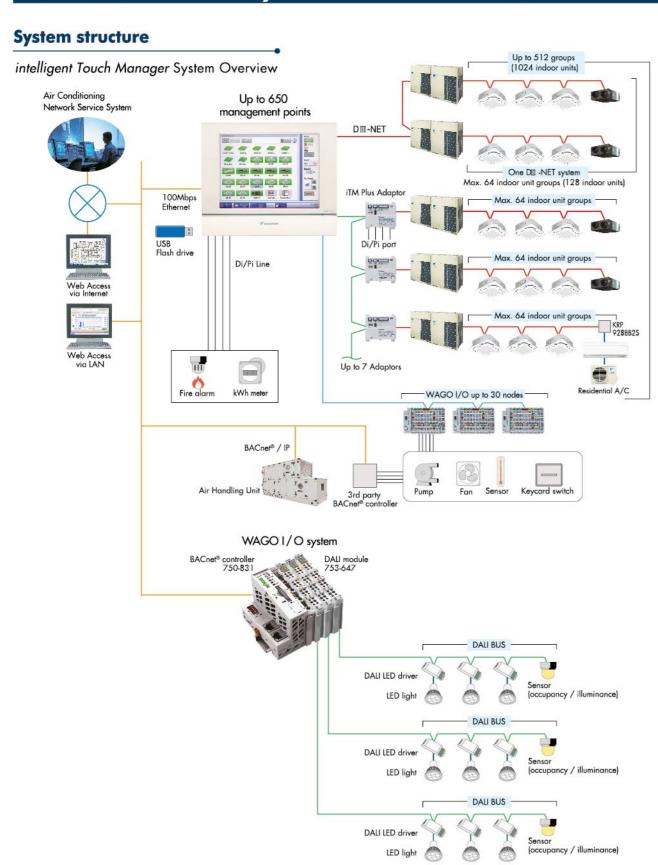


Air Conditioning Network Service System

Preventive Maintenance

The intelligent Touch Manager can be connected to Daikin's own Air Conditioning Network Service System for remote monitoring and verification of operation status for VRV system. By its ability to predict malfunctions, this service provides customers with

Enhanced convenience with link to the Air Conditioning Network Service System

The intelligent Touch Manager connects seamlessly to Daikin's 24-hour Air Conditioning Network Service System

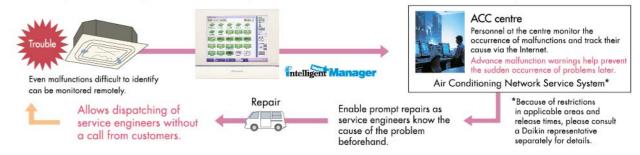

Daikin Offers a Variety of Control Systems

Convenient controllers that offer more freedom to administrators



Intelligent Controller

Ease of use and expanded control functions

The user-friendly controller features colours, multilingual function, and icons in the display for ease of understanding. A wide variety of control methods can be accommodated, permitting administrators to monitor and operate the system even when they are away from the controller.

Connect VRV system to your BMS via BACnet®or LONWORKS®

Compatible with BACnet® and LONWORKS®, the two leading open network comunication protocols, Daikin offers interfaces that provide a seamless connection between VRV system and your BMS.

Dedicated interfaces make Daikin air conditioners freely compatible with open networks



between VRV system and BACnet® open network protocol.

DMS502B51 (Interface for use in BACnet®)




Facilitating the network integration of VRV system and LONWORKS®

DMS504B51 (Interface for use in LONWORKS®)

Notes: 1. BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE).

2. LONWORKS® is a trademark of Echelon Corporation registered in the United States and other countries

Modbus Interface Adaptor

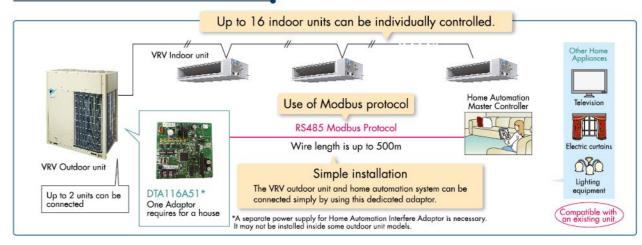


CONTROL SYSTEMS



Integrated Building Monitoring System

The high speed transmission of DIII-NET enables more advanced control of the VRV system, providing you with enhanced comfort.

88

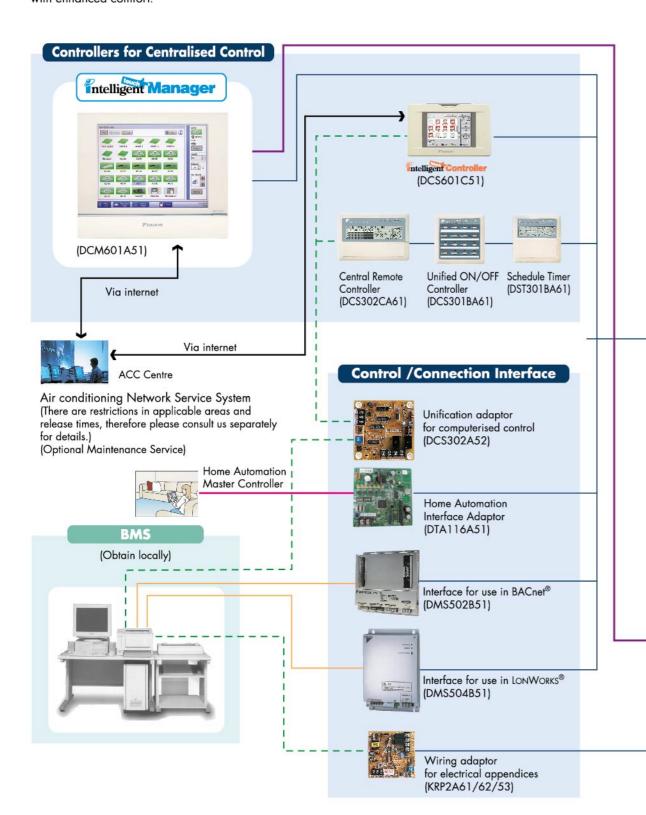

Integrated Building Monitoring System

DIII-NET Line

BACnet®/Ethernet or LONWORKS® Network Communication Line

--- Contact Signal Line

RS485 Modbus Line

WAGO Connection

The DIII-NET system provides for:

- · Close control and monitoring by integrating a wide variety of air conditioners in the entire building.

 Saving the in-building cabling using non-polar, two-wire cables. Easier wiring work
- with tremendously fewer wiring errors.

 Additional set-ups readily up and running. An extendable cabling up to 2 km in total.

 Different control equipment flexibly joined in the system for hierarchical risk
- Daikin's total heat exchangers and other devices all under integral control.



(High Speed Multiple Transmission)

DIII-NET, Our unique high speed multiple transmission system, links airconditioners and various other building equipment in accordance with applications, scale and conditions and transmits vast amounts of information between them.

Interface Adaptor for SkyAir Series (DTA112BA51)



SkyAir

* No adaptor is required for the FCQ-B and FHQ-BV.

Central Control Adaptor Kit (DTA107A55)



Interface Adaptor for DIII-NET use (KRP928BB2S)

The appropriately The argument which The argument which The argument with the second



Residential Airconditioner



Building services equipment

- Electrical equipment
 Supply water and drainage equipment
 Automatic fire alarm
- Parking equipment
- Ventilation equipment
- Lighting
 Crime and fire prevention equipment



WAGO

Limitation may apply to some models and functions. Please contact your local sales office for details. Consultation is necessary before employing this control system. Please contact your local sales office before

Note: BACnet[®] is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE). LONWORKS[®] is a trademark of Echelon Corporation registered in the United States and other countries.



Option List

Operation Control System Optional Accessories

For VRV indoor unit use

No.	Item		Туре	FXFSQ-A (For Black Panel)	FXFSQ-A	FXZQ-M	FXUQ-A	FXCQ-M	FXEQ-A	FXDQ-PD FXDQ-ND	
	8	in i	Receiver	BRC7M634K	BRC7M632F-6	BRC7M630W-6	BRC7CB58	BRC7M65	BRC7M626-6	BRC4M61-6	
1	Remote controller	Wireless	Handset	BRC/MO34K	BRC4M	150W16	DKC/CB36	DRC/MOS	BRC4M150W16		
- 20		Wired		200	DDC1E42			BRC1C62		0.000.000.000	
2	Navigation remote contro	Navigation remote controller (Wired remote controller)			Navigation remote controller (Wired remote controller) BRC1E63			BRC1E63 Note 7			
3	Simplified remote co	ontroller (Expe	osed type)				2_1				
4	Remote controller for h	otel use (Conce	ealed type)				_	je to	9	BRC3A61	
5	Adaptor for wiring			*	KRP1C63	★KRP1BA57	_	★KRP1B61	KRP1B61	★KRP1B56	
6-1	Wiring adaptor for	electrical app	endices (1)	,	KRP2A62	★KRP2A62		★KRP2A61	KRP2A61	★KRP2A53	
6-2	Wiring adaptor for	electrical app	pendices (2)	:★	KRP4AA53	★KRP4AA53	★KRP4AA53	★KRP4AA51	KRP4AA51	★KRP4A54	
7	Remote sensor (for in	ndoor temper	rature)	K	RCS01-4B		0.	KRCS01-1B			
8	Installation box for a	adaptor PCB	立		Note 2, 3 KRP1H98	Note 4, 6 KRP1BA101	KRP1BA97	Note 2, 3 KRP1B96	_	Note 4, 6 KRP1BA101	
9	External control ada	ptor for outd	oor unit	*[TA104A62	★DTA104A62		★DTA104A61	DTA104A61	★DTA104A53	
10	Adaptor for multi ter	nant		*[DTA114A61			_			

90

No.	İtem		Туре	FXMQ-P/ FXMQ-ARV	FXMQ-NVE	FXHQ-MA	FXAQ-A	FXLQ-MA FXNQ-MA	FXVQ-N
	2	140.1	Receiver	BRC4	M61-6	DD 0751 (A) (BRC7N618-6	BRC4M61-6	_
1	Remote controller	Wireless	Handset	BRC4M	150W16	BRC7EA63W	BRC4M	150W16	
		Wired				BRC1C62			BRC1C62 Note 8
2	Navigation remote cont	troller (Wired rei	mote controller)			BRC1E63 Note 7			BRC1E63 Note 9
3	Wired remote controll	er with weekly	schedule timer			BRC1D61			_
4	Simplified remote	controller (Ex	posed type)	BRC2C51	BRC2C51	j -	_	BRC2C51	_
5	Remote controller for hotel use (Concealed type)		BRC3A61	BRC3A61	— BRC3A61		BRC3A61	_	
6	Adaptor for wiring	ı		★KRP1C64	KRP1B61	KRP1BA54	1 - 1	KRP1B61	KRP1C67
7-1	Wiring adaptor fo	r electrical a	opendices (1)	★KRP2A61	KRP2A61	★KRP2 A61	★KRP2A61	KRP2A61	
7-2	Wiring adaptor fo	r electrical a	opendices (2)	★KRP4AA51	KRP4AA51	★KRP4AA52	★KRP4AA52	KRP4AA51	KRP2A62
8	Remote sensor (for	indoor temp	erature)	KRCS01-4B	. - -1	_	KRCS01-1B	-	i —
9	Installation box for	adaptor PCI	3 ☆	Note 1 KRP4A96	-	Note 3 KRP1 CA93	Note 1 KRP4AA93		
10	External control ad	laptor for out	door unit	★ DTA104A61	DTA104A61	★DTA104A62	★ DTA104A61	DTA104A61	DTA104A62
11	Adaptor for multi to	enant		★ DTA114A61	_	_	★DTA114A61		_
12	External control ad	aptor for coo	ling / heating						KRP6A1
13	Remote controller v	with key			<u> </u>				KRCB37-1

E	act	ior	 ist	

unction List		Round Flow with Sensing Type
		FXFSQ-A
Remote controller	Wired	BRC1E63
Kemote controller	Wireless	_
Dual sensors *1	70-	0
Direct airflow *1		0
Sensing sensor low mode *1		0
Sensing sensor stop mode *1		0
Circulation airflow		0
ndividual airflow di	rection control	0
Switchable 5 step fo	ın speed	0
Auto-airflow rate		0
Auto-swing		0
Swing pattern selection		0
High ceiling application		0

- Notes:

 1. Installation box ☆ is necessary for each adaptor marked ★.

 2. Up to 2 adaptors can be fixed for each installation box.

 3. Only one installation box can be installed for each indoor unit.

 4. Up to 2 installation boxes can be installed for each indoor unit.

 5. Installation box ☆ is necessary for second adaptor.

 6. Installation box ☆ is necessary for each adaptor.

 7. Individual airflow direction, auto airflow rate and sensing sensor control can be set only via wired remote controller BRC1E62/BRC1E63. Cannot be set via other remote controllers.

 8. Since the control panel is equipped as standard, use the option for 2 remote control system.

 9. When using BRC1E62/BRC1E63, be sure to remove the control panel and since BRC1E62/BRC1E63, be sure to remove the control panel and since BRC1E62/BRC1E63 cannot be stored inside the indoor unit, please place it separately.

Option List

System Configuration

No.	Îtem	Туре	Model No.	Function
1	Residential central remote controller		Note 2 DCS303A51	Up to 16 groups of indoor units (128 units) can be easily controlled using the large LCD panel. ON/OFF, temperature settings and scheduling can be controlled individually for indoor units.
2	Central remote controller		DCS302CA61	Up to 64 groups of indoor units (128 units) can be connected, and ON/OFF,
2-1	Electrical box with earth	terminal (3 blocks)	KJB311AA	temperature setting and monitoring can be accomplished individually or simultaneously. Connectable up to 2 controllers in one system.
3	Unified ON/OFF contro	oller	DCS301BA61	 Up to 16 groups of indoor units (128 units) can be turned, ON/OFF individually or
3-1	Electrical box with earth	terminal (2 blocks)	KJB212AA	simultaneously, and operation and malfunction can be displayed. Can be used in
3-2	Noise filter (for electromagn	netic interface use only)	KEK26-1A	combination with up to 8 controllers.
4	Schedule timer		DST301BA61	Programmed time weekly schedule can be controlled by unified control for up to 64 groups of indoor units (128 units). Can turn units ON/OFF twice per day.
5		For CDXS, FDK(X)S, FTK(X)S	Note 3 KRC72A	Up to 5 indoor units can be controlled. This is a low cost system which can only control ON/OFF.
6		For CDXS, FDK(X)S, FTK(X)S	KRP928BB2S	Adaptors required to connect products other than those of the VRV System to the high-speed DIII-NET communication system adopted for the VRV System.
7		For FCQ-B, FFQ-B, FHQ-BV, FBQ-B	*DTA112BA51	
8	Central control adaptor kit		*DTA107A55	* To use any of the above optional controllers, an appropriate adaptor must be installed on the product unit to be controlled.
9	Wiring adaptor for other		*DTA103A51	installed on the product unit to be controlled.
10	DIII-NET Expander Adaptor		DTA109A51	Up to 1024 units can be centrally controlled in 64 different groups. Wiring restrictions (max. length: 1,000m, total wiring length: 2,000m, max. number of branches: 16) apply to each adaptor.
10-1	Mounting plate		KRP4A92	Fixing plate for DTA109A51

Note: 1. Installation box for ★ adaptor must be obtained locally.

2. For residential use only. Cannot be used with other centralised control equipment.

3. A wiring adaptor (KRP413AB1S) is also required for each indoor unit.

Building Management System

No.			Item		Model No.	Function
1	intelligent Touch Controller	Basic	Hardware	intelligent Touch Controller	DCS601C51	Air conditioning management system that can be controlled by a compact all-in-one unit.
1-1	Controller	Option	Hardware	DIII-NET plus adaptor	DCS601A52	Additional 64 groups (10 outdoor units) is possible.
1-2	-2 Electrical box with earth terminal (4 blocks)			ocks)	KJB411A	Wall embedded switch box.
2		Basic	Hardware	intelligent Touch Manager	DCM601A51	 Air conditioning management system that can be controlled by touch screen.
2-1	intelligent Touch		Hardware	iTM plus adaptor	DCM601A52	 Additional 64 groups (10 outdoor units) is possible.Max. 7 iTM plus adaptors can be connected to intelligent Touch Manager.
2-3	Manager	Option	Software	iTM power proportional distribution	DCM002A51	 Power consumption of indoor units are calculated based on operation status of the indoor unit andoutdoor unit power consumption measured by kWh metre.
2-4				iTM energy navigator	DCM008A51	Building energy consumption is visualised. Wasted air conditioning energy can be found out.
2-5	Di unit	-			DEC101A51	8 pairs based on a pair of ON/OFF input and abnormality input.
2-6	Dio unit				DEC102A51	4 pairs based on a pair of ON/OFF input and abnormality input.
3		*1 Inter	face for use	in BACnet ®	DMS502B51	 Interface unit to allow communications between VRV and BMS. Operation and monitoring of air conditioning systems through BACnet® communication.
3-1		Optiona	l DIII board	3	DAM411B51	 Expansion kit, installed on DMS502B51, to provide 2 more DIII-NET communication ports. Not usable independently.
3-2	Communication	Optional Di board			DAM412B51	Expansion kit, installed on DMS502B51, to provide 16 more wattmeter pulse input points. Not usable independently.
4	Interface	*2 Inter	face for use	in LONWORKS®	DMS504B51	Interface unit to allow communications between VRV and BMS. Operation and monitoring of air conditioning systems through LonWorks® communication.
5		Home A	utomation Ir	nterface Adaptor	DTA116A51	Use of the Modbus protocol enables the connection of the VRV system with a variety of home automation systems from other manufacturers.

- Notes:

 *1. BACnet® is a registered trademark of American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE).

 *2. LonWorks® is a trademark of Echelon Corporation registered in the United States and other countries.

 *3. Installation box for * adaptor must be obtained locally.

AIR HANDLING UNIT

HEADER PACK



Integrate your air handling unit for large size spaces such as factories and for fresh air solutions.


Capacity range: 6 - 60 HP



- Easy design and installation
- The system is easy to design and install since no additional water systems such as boilers, tanks, gas connections, etc. are required
- Inverter controlled units
- Control of air temperature via standard Daikin wired remote control



92

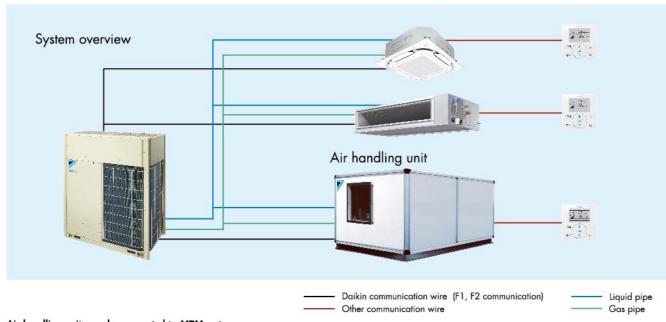

Air handling units can be connected to VRV systems.

This combination can be built to order as a system. Outdoor air series is also possible. Please contact your local sales office for details.

*Control box and expansion valve kit are necessary for integration of AHU and VRV system.

The Innovative Refrigerant Piping of next generation


Daikin innovated Next Generation of Quality and Efficiency for VRV Installation. It offers differentiated soulutions in installation. It ensures quality installation with reduction of site work.



Header Pack

Advantage

- Installation time saving: Up to 1/3 of conventional method
- Easy to Install: Hanging points available
- Safety: Consists of faring method, no brazing required*
- Space saving: Head pack to Indoor unit soft drawn pipe, top side of refrigerant pipe doesn't need space for brazing torch movement
- Quality Installation: Elimination of difficult process, enhancing quality Installation

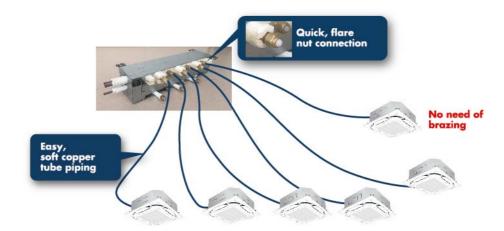

Compact design to fit into narrow attic space

Light weight and the compact body give minimum damage on the building structure.

Header Pack Line-up

		Piping connection	ns (Liquid/Gas mm)	1.1	
Model Name	HP	Outdoor unit side Indoor unit side		Indoor unit total capacity index	
BHF6RHP6	6	Φ9.5/Φ15.9	(Φ9.5/Φ15.9)×1 (Φ6.4/Φ12.7)×3	<150	
BHF8RHP6	8	Φ9.5/Φ19.1		150 ≦ X < 200	
BHF10RHP6	10	Φ9.5/Φ22.2	(Φ9.5/Φ15.9)×3 (Φ6.4/Φ12.7)×3	200 ≦ X < 290	
BHF16RHP6	16	Φ12.7/Φ28.6		290 ≦ X < 420	

 92

DAIKIN GAS TIGHT JOINT (DGT)



Non-brazed connection for Refrigerant piping


Evolutionally - Advanced Feature

A combination of rubber packing and screwed metal body offers gas-tight and rigid connection without brazing. Patented "Leverage Method" mechanically holds the pipe and prevents it from pull-out.



Mechanism

As the nut turns, the "B" point of leverage corns are compressed and encroached to the surface of the pipe. When the pull-out force increases, the corns are encroached more deeper to prevent pipe pull-out.

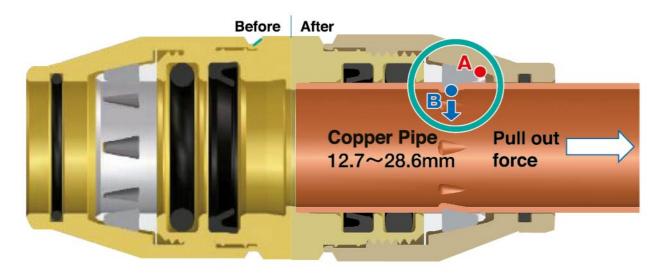

Excellent peformance

By the unique double sealing method, the sealing performance is secured over a long period even under such severe conditions as pressure of 4.3MPa during temperature of -45 °C through +130 °C.

Durable for high pressure

By leverage method, the pull-out resistance is more than 4 times (17.2MPa) of the max. operating pressure.

Easy Installation

The installation is completed by only one or two turns for a nut with low torque tightening without any special tools (regular wrenches or spanners are used) in the limited small space.


Fire Free Connection

Neither nitrogen gas replacement nor fire prevention cure is required. The time for installation is shorten and the total cost is reduced. The installation quality is much more stable compared with a brazing method.









 $\phi 6.4 - \phi 9.5$

Daikin Gas Tight Joint Line up

			Size (mm)		W: L/DC
Figure	Model Name	Inner Diameter	Outer Diameter	Length (L)	Weight/PC (gm)
	BDGTA06	Ø6.4	19.0	46.2	106
	BDGTA09	Ø9.5	22.2	51.4	139
	BDGTA12	Ø12.7	23.8	82.3	170
L	BDGTA15	Ø15.9	29.7	82.8	236
	BDGTA19	Ø19.1	35.0	85.5	327
	BDGTA22	Ø22.2	38.0	93.5	401
	BDGTA28	Ø28.6	45.0	99.5	546

94





96





A recent trend rapidly gaining popularity is the need for air treatment along with air conditioning. Our Outdoor-Air Processing Unit can combine fresh air treatment and air conditioning, supplied from a single system. It adjusts the temperature of air from outdoors using a fixed discharge temperature control. Along with Outdoor-Air Processing Units, we also offer Heat Reclaim Ventilator systems. The Heat Reclaim Ventilator VAM-GJ series units in particular have been praised for their compactness, energy conservation and extensive operation range of outdoor temperatures. This series provides higher enthalpy efficiency \star^1 , due to the greatly enhanced performance of the thin film element. Furthermore, improved external static pressure \star^2 offers more flexibility for installation. The Heat Reclaim Ventilator VKM-GAM series units, equipped with a DX-coil and a humidifier, provide further advanced features, such as temperature adjustment to suit conditions indoors and to prevent cold air from blowing on people directly during heating operation. The series also realises significant energy savings by exercising heat recovery.

- ★1 For models: VAM 250/650/800/1000/2000GJVE
- ★2 For models: VAM 500GJVE



		Outdoor-Air		Heat Reclain	n Ventilator
		Processing Unit	VKM-GAM Type	VKM-GA Type	VAM-GJ Type
		Ventilation Humidification Air Processing*		Humidification Processing*	Ventilation Humidification
			£.0.		00
	Refrigerant Piping	Connectable	Connec	ctable	Not connectable
Connections	Wiring	Connectable	Conne	ctable	Connectable
with VRV X	After-cool & After-heat Control	Available	Available		Not available
Heat Exchar	nge Element	_	Energy saving	gs obtained	Energy savings obtained
Humidifier		-	Fitted	_	_
High Efficier	ncy Filter	Option	Opt	tion	Option
Ventilation S	System	Air supply only	Air supply &	air exhaust	Air supply & air exhaust
Power Supp	ly	220-240 V, 50 Hz	220-240	V, 50 Hz	220-240 V/220 V, 50 Hz
					250 m³/h
Airflow Rate				m³/h	500 m³/h 650 m³/h
		1080 m³/h 1680 m³/h		m³/h) m³/h	800 m³/h 1000 m³/h 1500 m³/h 2000 m³/h
		2100 m³/h	100		2000 111 / 11

98


Outdoor-Air Processing Unit

Combination of fresh air treatment and air conditioning, supplied from a single system.


Lineup Model Name FXMQ125MFV1 FXMQ200MFV1 FXMQ250MFV1



Fresh air treatment and air conditioning can be achieved with a single system by using the heat pump technology - without the usual troublesome air supply and air discharge balance design. Fan coil units for air conditioning and an outdoor-air processing unit can be connected to the same refrigerant line. The results are enhanced design flexibility and a significant reduction in total system costs.

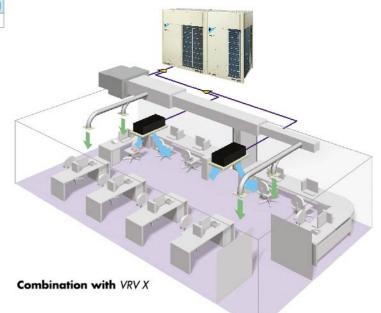

Air conditioning and outdoor air processing can be accomplished using a single system.

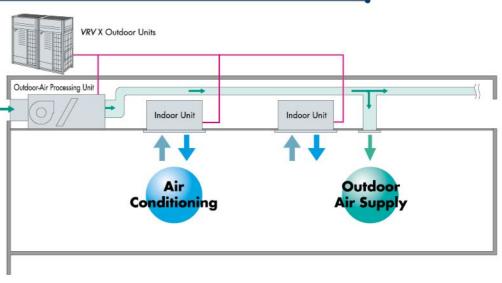

Connection Conditions

The following restrictions must be observed in order to maintain the indoor units connected to the same system.

- . When outdoor-air processing units are connected, the total connection capacity index must be 50% to 100% of the capacity index of the outdoor units.
- When outdoor-air processing units and standard indoor units are connected, the total connection capacity index of the outdoor-air processing units must not exceed 30% of the capacity index of the outdoor units.
- Outdoor-air processing units can be used without indoor units.

 98

^{*}Refers to bringing outdoor air to near indoor temperature and delivering to a room.



Standard Specifications

Indoor unit

	Туре			Ceiling Mounted Duct Type			
	Model		FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1		
Power :	supply		1-phase 220-240 V (also required for indoor units), 50 Hz				
		kcal/h	12,000	19,300	24,100		
Cooling	g capacity *1	Btu/h	47,800	76,400	95,500		
		kW	14.0	22.4	28.0		
		kcal/h	7,700	12,000	15,000		
Heating	capacity *1	Btu/h	30,400	47,400	59,400		
		kW	8.9	13.9	17.4		
Power consumption		kW	0.359	0.548	0.638		
Casing			Galvanised steel plate				
Dimensions (HXWXD) mm		mm	470x744x1,100	470x1,3	80x1,100		
	Motor output kW			0.380			
Fan	Airflow rate	m³/min	18	28	35		
un	Zarnow raio	cfm	635	988	1,236		
	External static pressure 220	//240 V Pa	185/225	225/275	205/255		
Air filte	r		3	*2	19		
	Liquid	mm		ø9.5 (flare)			
Refrige	rant Gas	mm	ø15.9 (flare)	ø19.1 (brazing)	ø22.2 (brazing)		
piping	Drain	mm		PS1B female thread			
Machin	e weight	kg	86	1	23		
Sound	level *3 220	1/240 V dB(A)	42/43	47	//48		
Connectable outdoor units *4 *5			6 HP an	d above	10 HP and above		
Operat	ion range	Cooling		19 to 43°C			
	de operation between 15 and	19°C) Heating		-5 to 15°C			
Range	of the discharge	Cooling		13 to 25°C			
	ature *6	Heating		18 to 30°C			

- Notes: *1. Specifications are based on the following conditions;

 Cooling: Outdoor temp. of 33°CDB, 28°CWB (68% RH), and discharge temp. of 18°CDB.

 Equivalent reference piping length: 7.5 m (0 m horizontal)

 *2 An intake filter is not supplied, so be sure to install the optional long-life filter or high efficiency filter. Please mount it in the duct system of the suction side. Select a dust collection efficiency (gravity method) of 50% or more.


 *3 Anechoic chamber conversion value, measured at a point 1.5 m downward from the unit centre. These values are normally somewhat higher during actual operation as a result of ambient conditions.
- *4. It is possible to connect to the outdoor unit if the total capacity of the indoor units is 50% to 100% of the capacity index of the outdoor units.
 *5 It is not possible to connect to the 6 HP outdoor unit.


100

- This apparatus to contact to the transfer of the transfer

Dimensions


FXMQ125/200/250MFV1







^{*}These diagrams are based on FXMQ200 and FXMQ250MFV1.

FXMQ200/250MFV1







Local connection piping size

Model	Gas piping diameter	Liquid piping diameter		
FXMQ125MFV1	ø15.9	ø9.5		
FXMQ200MFV1	ø19.1 attached piping	ø9.5		
FXMQ250MFV1	ø22.2 attached piping	ø9.5		

Table of dimensions

Model	Model A		С	D		
FXMQ125MFV1	744	685	5x100=500	20-Ø 4.7 hole		
FXMQ200MFV1	1380	1296	11x100=1100	32-Ø 4.7 hole		
FXMQ250MFV1	1380	1296	1380	32-Ø 4.7 hole		


- The attached piping in the diagram is for FXMQ200MFV1 and FXMQ250MFV1 only. The gas piping connection port (2) in the diagram) has a different bore form with FXMQ125MFV1.
- a. An air filter is not supplied with this unit. Be sure to mount an air filter in the suction side. [Use a filter with dust collection efficiency of at least 50% (gravimetric method). This is available as an option.]
 3. For outdoor ducts, be sure to provide heat insulation to prevent
- 1 Liquid pipe connection
- 2 Gas pipe connection
- 3 Drain piping connection
- 4 Electric parts box
- ⑤ Ground terminal
- 8 Transmission wiring connection
- Hanger bracket
- 10 Discharge companion flange

Power supply wiring connection

1) Water supply port 12 Attached piping (Note. 1)

6 Name plate

FXMQ125MFV1





Options

Indoor unit

		Model	FXMQ125MFV1	FXMQ200MFV1	FXMQ250MFV1				
	ration remote	controller		BRC1E62/BRC1C62					
Centre	ral remote co	ontroller	DCS302CA61						
	ed ON/OFF	controller	DC\$301BA61						
Sched Wirin	Schedule timer		DST301BA61						
Wirin	Wiring adaptor for electrical appendices (1)		KRP2A61						
Wirin	ng adaptor f	or electrical appendices (2)		KRP4AA51a					
Long-	Long-life replacement filter		KAFJ371L140	KAFJ371L140 KAFJ371L280					
g High-	-efficiency	Colourimetric method 65%	KAFJ372L140	KAFJ37	'2L280				
Filter		Colourimetric method 90%	KAFJ373L140	KAFJ37	73L280				
Filter	Filter chamber *1 sin pump kit		KDJ3705L140 KDJ3705L280						
Drain pum				KDU30L250VE					
Adaptor fo	laptor for wiring		KRP1B61						

- Notes: *1. Filter chamber has a suction-type flange. [Main unit does not.]


 Dimensions and weight of the equipment may vary depending on the options used.

 Some options may not be usable due to the equipment installation conditions, so please confirm prior to ordering.
- Some options may not be used in combination.
 Operating sound may increase somewhat depending on the options used.



Heat Reclaim Ventilator with DX-Coil and Humidifier-VKM Series

The Heat Reclaim Ventilator lineup features the DX-coil in response to recently diversifying outdoor air introduction requirements.

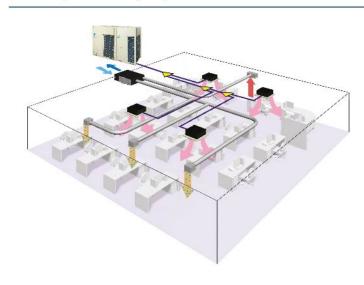

Efficient outdoor air introduction is possible

The Heat Reclaim Ventilator (VKM series) series introduces fresh outdoor air with minimum heat losses, while a wide variety of features responds to customer requirements.

Line-up

	With DX Coil & Humidifier Type								
Model Name	VKM50GAMV1	VKM80GAMV1	VKM100GAMV1						
Capacity Index	31.25	50	62.5						

	With DX Coil Type							
Model Name	VKM50GAV1	VKM80GAV1	VKM100GAV1					
Capacity Index	31.25	50	62.5					

VKM80GAV1



Humidifier

The line-up includes models with a humidifier, in response to diversifying customer requirements. (VKM50/80/100GAMV1 only)


DX-coil

The Heat Reclaim Ventilator features DX-coil that contributes to the prevention of cold airflow hitting people directly during heating operation, due to the after-cool, after-heat operations done beforehand.

High static pressure

High external static pressure means enhanced design flexibility.

Air conditioning and outdoor air processing can be accomplished using a single system.

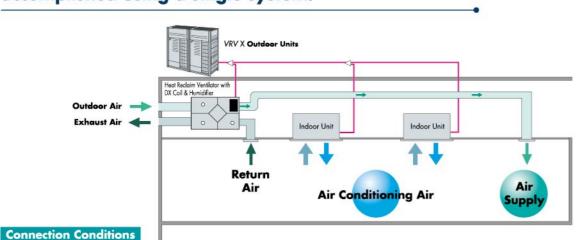


The following restrictions must be observed in order to maintain the indoor units connected to the same system.


When the Heat Reclaim Ventilator VKM series units are connected, the total connection capacity index must be 50% to 130% of the capacity index of the outdoor units.

Heat Reclaim Ventilator with DX-Coil and Humidifier-VKM Series


A compact unit packed with our cutting-edge technology

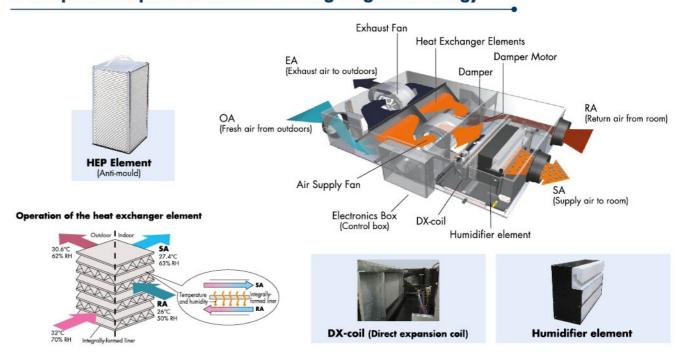

Heating and humidification process

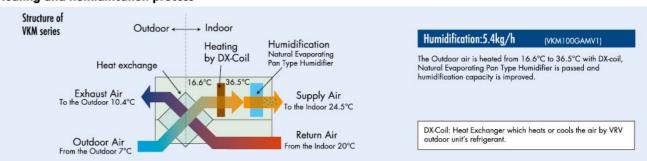

Efficient outdoor air introduction with heat exchanger and cooling/heating operations

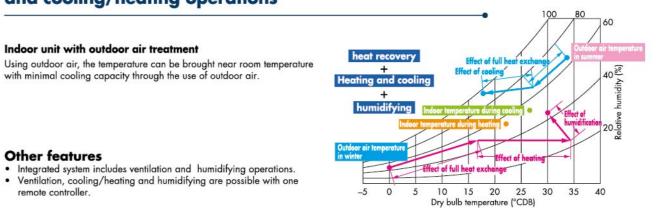



Specifications

	MODEL			VKM50GAMV1*	VKM80GAMV1*	VKM100GAMV1*	VKM50GAV1	VKM80GAV1	VKM100GAV1			
Refrigerant						R-4	10A					
Power Supply	100					1-phase, 220-	-240 V, 50 Hz					
	Ultra-high	Airflow rate	m³/h	500	750	950	500	750	950			
	Olfra-nign	Static pressure	Pa	160	140	110	180	170	150			
Airflow Rate & Static	High	Airflow rate	m³/h	500	750	950	500	750	950			
Pressure (Note 7)	riign	Static pressure	Pa	120	90	70	150	120	100			
	Laure	Airflow rate	m³/h	440	640	820	440	640	820			
	Low	Static pressure	Pa	100	70	60	110	80	70			
	Heat	Ultra-high		560	620	670	560	620	670			
	exchange	High	w	490	560	570	490	560	570			
D	mode	Low		420	470	480	420	470	480			
Power Consumption		Ultra-high		560	620	670	560	620	670			
	Bypass	High	w	490	560	570	490	560	570			
	mode	Low		420	470	480	420	470	480			
Fan Type				Sirocco Fan								
Motor Output		22 10 20	kW	0.280 x 2	0.280 x 2	0.280 x 2	0.280 x 2	0.280 x 2	0.280 x 2			
***	Heat	Ultra-high		37/37.5/38	38.5/39/40	39/39.5/40	38/38.5/39	40/41/41.5	40/40.5/41			
	exchange	High	dB(A)	35/35.5/36	36/37/37.5	37/37.5/38	36/36.5/37	37.5/38/39	38/38.5/39			
Sound Level (Note 5)	mode	Low		32/33/34	33/34/35.5	34/34.5/35.5	33.5/34.5/35.5	34.5/36/37	35/36/36.5			
(220/230/240 V)		Ultra-high		37/37.5/38	38.5/39/40	39/39.5/40	38/38.5/39	40/41/41.5	40/40.5/41			
	Bypass	High	dB(A)	35/35.5/36	36/37/37.5	37/37.5/38	36/36.5/37	37.5/38/39	38/38.5/39			
	mode	Low		32/33/34	33/34/35.5	34/34.5/35.5	33.5/34.5/35.5	34.5/36/37	35/36/36.5			
Humidification Capacity	(Note 4)	- Inches	kg/h	2.7	4.0	5.4		_	1 11/11/11/11			
e. sur er	Ultra-high			76	78	74	76	78	74			
Temp. Exchange	High		%	76	78	74	76	78	74			
Efficiency	Low			77.5	79	76.5	77.5	79	76.5			
	Ultra-high			64	66	62	64	66	62			
Enthalpy Exchange		High		64	66	62	64	66	62			
Efficiency (Cooling)	Low			67	68	66	67	68	66			
	Ultra-high			67	71	65	67	71	65			
Enthalpy Exchange	High		1 %	67	71	65	67	71	65			
Efficiency (Heating)	Low			69	73	69	69	73	69			
Casing	-		-		,,,		Steel Plate	, ,				
Insulating Material						Self-Extinguishab	le Urethane Foam					
Heat Exchanging System	1				Air to Air C	ross Flow Total Heat (Sensible + Latent Hea	it) Exchange				
Heat Exchanger Element			7			ALL ALL DESCRIPTION OF THE PARTY OF THE PART	lon-flammable Paper					
Air Filter						Multidirectional						
	ing (Note 2)		1.	2.8	4.5	5.6	2.8	4.5	5.6			
	ing (Note 3)		kW	3.2	5.0	6.4	3.2	5.0	6.4			
1.75	Height			387	387	387	387	387	387			
Dimensions	Width		mm	1,764	1,764	1,764	1,764	1,764	1,764			
	Depth			832	1,214	1,214	832	1,214	1,214			
Connection Duct Diamet					Ø 25		Ø 200		250			
		Net		Ø 200 102	120	125	96	109	114			
Machine Weight		Gross (Note 8)	kg	107	129	134		8_	1.55			
	Around Unit						80%RH or less					
Unit Ambient Condition												
					-15°C-40°C DB, 8 0%RH or less 0°C-40°C DB, 8 0%RH or less							

- temperature: /*C UB, 6*C WB

 The operating sound measured at the point 1.5 m below the centre of the unit is converted to that measured in an anachoic chambar built in accordance with the JIS C 1502 conditions. The actual operating sound varies depending on the surrounding conditions (near running unit's sound, reflected sound and so on) and is normally higher than this value.
- For operation in a quiet room, it is required to take measures to lower the sound.
- For details, refer to the Engineering Data.

 6. The noise level at the air discharge port is about 8–11 dB(A) or higher than the unit's operating sound. For

- 6. The noise level of the air discharge port is about 8-11 dB(A) or higher than the un operation in a quiet room, it is required to lake measures to lower the sound.
 70. Airflow rate can be changed over to Low mode or High mode.
 8. In case of holding full water in humidifier.
 9. OA: fresh air from outdoor. RA: return air from room.
 10. Specifications, design and information here are subject to change without notice.
 11. Power consumption and efficiency depend on the above value of airflow rate.

- Notes: 1. Cooling and heating capacities are based on the following conditions. Fan is based on htigh and Ultra-high. When calculating the capacity as indoor units, use the following figures: VKM50GAMV1/GV1: 3.5 kW, VKM100GAMV1/GV1: 3.5 kW, VKM10

 - unit, perform group-linked operation, and make the direct duct connection settings from the remate controller. (Mode No. "17 [27]" First code No. "5" Second code No. "6".) Also, do not connect to the outlet side of the indoor unit. Depending on the fan strength and static pressure, the unit might back up.
 - Feed clean water (city water, top water or equivalent). Dirty water may clog the valve or cause dirt deposits in the water container, resulting in poor humidifier performance. (Never use any cooling tower)
 - water and heating purpose water.)


 Also, if the supply water is hard water, use a water softener because of short life.

 Life of humidifying element is about 3 years (4,000 hours) under the supply water conditions of hardness: 150 mg/l. (Life of humidifying element is about 1 year (1,500 hours) under the supply water conditions of hardness: 400 mg/l.)

 Annual operating hours: 10 hours/day x 26 days/month x 5 months = 1,300 hours

Dimensions

VKM50/80/100GA(M)V1

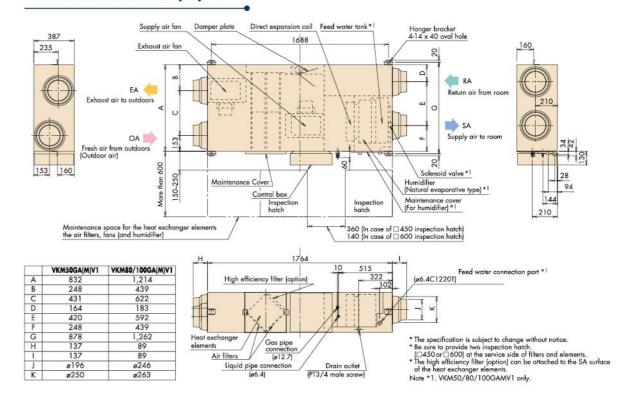

Options

m	D	ote control	la-						DDC1E49/	BRC1C62 *1					
+	Kem		ner Residential central remote controll							3A51 *2					
		ralised	Central remote controller	A .	DCS302CA61										
	devi	rolling -	Unified ON/OFF controller						DCS30						
	ue i	-	Schedule timer		DST301BA61										
device		Wiring ac	daptor for electrical es		KRP2A61										
20		For humic	difier running ON signal output		KRP50-2										
	łor	For heater	r control kit		BRP4A50										
Billioning	Board Adaptor	For wiring	Type (indoor unit of VRV)	FXFQ-S FXFQ-AVM	FXZQ-M	FXUQ-A	FXCQ-M	FXKQ-MA	FXDQ-PD FXDQ-ND	FXMQ-P FXMQ-AR	FXMQ-MA	FXHQ-MA	FXAQ-P	FXLQ-MA FXNQ-MA	FXVQ
	2). 	KRP1C63 ★	KRP1BA57 ★	KRP1C67	KRP1B61 ★	KRP1B61	KRP1B56 ★	KRP1C64 ★	KRP1B61	KRP1BA54	_	KRP1B61	KRP1C6
		Installation box for adaptor PCB 🜣		Notes 2, 3 KRP1H98	Note 4, 6 KRP1BA101		Notes 2, 3 KRP1B96	-	Notes 4, 6 KRP1BA101	Notes 2, 3 KRP4A96	-	Note 3 KRP1CA93	Notes 2, 3 KRP4AA93	_	-

- Notes: 1. Installation box & is necessary for each adaptor marked *.
 - Up to 2 adaptors can be fixed for each installation box.
 Only one installation box can be installed for each indoor unit.
 - 4. Up to 2 installation boxes can be installed for each indoor unit.

 5. Installation box ÷ is necessary for second adaptor.

 1. Installation box ÷ is necessary for second adaptor.
- 6. Installation box ★is necessary for each adaptor.
 7. *1 Necessary when operating a Heat Reclaim Ventilator (VKM) independently. When operating interlocked with other air conditioners, use the remote controllers of the air conditioners.
 *2 For residential use only. When connected to a Heat Reclaim Ventilator (VKM), you can only switch the power ON/OFF. Cannot be used with other centralised control equipment.

tem	Туре		VKM50GA(M)V1	VKM80GA(M)V1 VKM100GA(M)V					
6	Silencer		-	KDDM24B100 Ø 250					
funct		Nominal pipe diameter mm	<u>-</u>						
	Air suction/	White	K-DGL200B	K-DGL250B					
dditional	Discharge grille	Nominal pipe diameter mm	ø 200	ø 250)				
Ř	High efficiency filte	er	KAF242J80M	KAF242J100M					
	Air filter for replac	ement	KAF241G80M	KAF241G100M					
Elav	ible clust (1 m)		N EDCOOLD	N EDGGETD					

23%

AIR TREATMENT EQUIPMENT LINE-UP



Heat Reclaim Ventilator - VAM Series

The Heat Reclaim Ventilator creates a high-quality environment by interlocking with the air conditioner

VAM250GJVE, VAM500GJVE, VAM650GJVE, VAM800GJVE, VAM1000GJVE, VAM1500GJVE, VAM2000GJVE

Improved Enthalpy Efficiency Higher External Static Pressure*2 **Enhanced Energy Saving Functions**






BRC301B61 (Option)

This remote controller is used in case of independent operated of Heat Reclaim Ventilator.

This VAM series provides higher Enthalpy Efficiency*1 due to the greatly enhanced performance of the thin film element. Furthermore, improved external static pressure*2 offers more flexibility of installation. Along with these three outstanding improvement, the night-time free cooling operation contributes to energy conservation and more comfortable space.

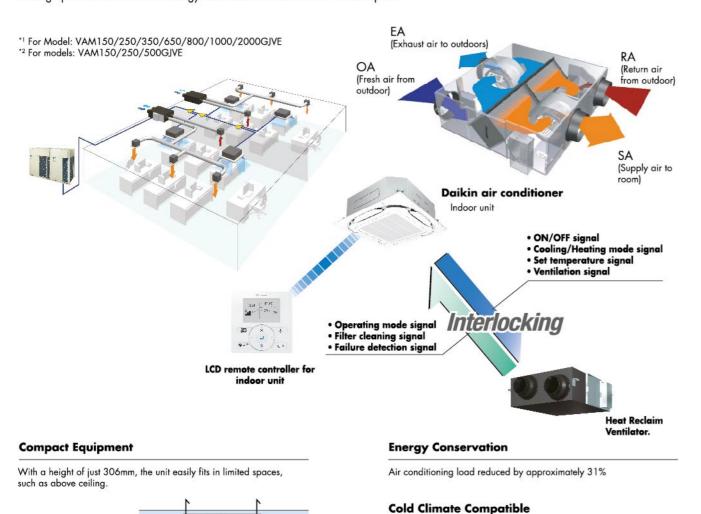

Standard operation at

temperatures down to -15°C.

306 mm

Heat Reclaim Ventilator — VAM Series

Air conditioning load reduced by approximately 31%

Total heat exchange ventilation


This unit recovers heat energy lost through ventilation and curbs room temperature changes caused by ventilation, thereby conserving energy and reducing the load on the air conditioning system.

Enthalpy Efficiency drastically improved by employing thin film element (VAM-GJ model)

Due to thinner film....

- Decreases the moisture resistance of the partition sheets drastically.
- Realises more space for extra layers in the element, resulting in increased effective area that supply and exhaust air can be exposed to

Moisture absorption increased by approx. 10%




Auto-ventilation Mode Changeover Switching

Automatically switches the ventilation mode (Total heat Exchange Mode/Bypass Mode) according to the operating status of the air conditioner.

Pre-cool, Pre-heat Control

Reduces air conditioning load by not running the Heat Reclaim ventilator while air is still clean soon after the airconditioner is turned ON.




Application: Tokyo office building

Building from: 6 floors above ground, 2 floors underground, floor area 2,100 m² Personnel density: 0.25 person/m² Ventilation volume: 25 m3/h

Indoor airconditioning level: summer 25°C 50% RH, intermediate seasons 24°C 50% RH, Winter 22°C 40%RH

Operating time: 2746 hours (9 hours per day, approx. 25 days per month)
Calculation method: simulation based on "MICRO-HASP/1982" of the Japan Building Mechanical and Electrical Engineers Association.



Night-time free cooling operation'

Night-time free cooling operation is an energy-conserving function that works at night when air conditioners are off. By ventilating rooms containing equipment that raises that room temperature, night-time free cooling operation reduces the cooling load when air conditioners are turned on in the morning.

It also alleviated feeling of discomfort in the morning caused by heat accumulated during the night.


Night-time free cooling operation only works to cool and if connected to

- Building Multi or VRV systems.


 Night-time free cooling operation is set to "off" in the factory setting, so
- if you wish to use it, request your dealer to turn it on.

- *1 This Function can be operated only when interlocked with air conditioners.
 *2 Value is based on the following conditions:
 Cooling operation performed from April to October.
 Calculated for air conditioning sensible heat load only

The indoor accumulated heat is discharged at night. This reduces the air conditioning load the next day thereby increasing efficiency.







The load is small so the temperature is rapidly reduced to a comfortable level.

* Interlocked operation with an air conditione



Specifications

	MODEL			VAM250GJVE	VAM500GJVE	VAM650GJVE	VAM800GJVE	VAM1000GJVE	VAM1500GJVE	VAM2000GJVE		
Power Su	pply					1-phase, 2	20-240 V/ 220 V,	50 Hz				
Temp. Ex	chanae	Ultra-High		75/75	74/74	75/75	72/72	78/78	72/72	77/77		
Efficiency	,	High	%	75/75	74/74	75/75	72/72	78/78	72/72	77/77		
(50/60 F	tz)	Low		79/79	80/80.5	77/77.5	74/74.5	80.5/81	75.5/76	79/81		
		Ultra-High		71/72	67/67	67.5/67.5	65/65	70/70	65/65	72/72		
	For Heating	High	%	71/71	67/67	67.5/67.5	65/65	70/70	65/65	72/72		
Enthalpy Exchange		Low		74/74	74/74.5	71.5/72	67.5/68	72.5/73	67/67.5	76/76		
Efficiency	,	Ultra-High		63/63	55/55	61/61	61/61	64/64	61/61	62/62		
(50/60 F	For Cooling	High	%	63/63	55/55	61/61	61/61	64/64	61/61	62/62		
		Low		66/66	59/59.5	64/64.5	64/64.5	68.5/69	64/64.5	66/67		
	Heat	Ultra-High		137/141	248/270	342/398	599/680	635/760	1,145/1,300	1,289/1,542		
	Exchange	High	w	120/125	225/217	300/332	517/597	567/648	991/1,144	1,151/1,315		
Power Consump	Mode	Low		60/59	128/136	196/207	435/483	476/512	835/927	966/1,039		
(50/60 H		Ultra-High		137/141	248/270	342/398	599/680	635/760	1,145/1,300	1,289/1,542		
	Bypass Mode	High	w	120/125	225/217	300/332	517/597	567/648	991/1,144	1,151/1,315		
	Woode	Low		60/59	128/136	196/207	435/483	476/512	835/927	966/1,039		
	Heat	Ultra-High		27-29/29	33-35.5/34	34-36/36	39-40.5/39.5	39.5-41.5/39.5	39.5-41.5/41.5	41.5-43.5/42		
	Exchange	High	dB(A)	26-27.5/28	31.5-34/32	33-34.5/34	37-39.5/37.5	37.5-39.5/37.5	37.5-39.5/39.5	39-43/40		
Sound Le	Mode	Low		21-22/21	25-28.5/24	27.5-29.5/28	35-37.5/34	35-37.5/34.5	35-37.5/36	36-39/39		
(50/60 H	tz)	Ultra-High		28.5-30.5/30.5	34.5-36/35.5	35-37.5/37.5	40.5-42/41	40.5-42.5/40.5	41-43/42.5	43-45.5/44		
	Bypass Mode	High	dB(A)	27.5-29/29.5	33-34.5/33.5	33-35.5/35.5	38.5-40/39	38.5-40.5/38.5	39.5-41/41.5	40.5-45/42		
	Wode	Low		22.5-23/22.5	25.5-28.5/25.5	27.5-30.5/29.5	36-38.5/35.5	36-38.5/35.5	36.5-38/37.5	37.5-39.5/41		
Casing	1.0	À	de V	Galvanised steel plate								
Insulation	Material					Self-extingu	ishable polyurethan	e foam				
Dimensio	ns (HXWXD)		mm	278X810X551	306X879X800	338X973X832	387X1,111X832	387X1,111X1,214	785X1,619X832	785X1,619X1,214		
Machine	Weigh		kg	24	32	45	55	67	129	157		
Heat Excl	hange System				Air to	air cross flow total h	neat (Sensible heat+	latent heat) exchang	je			
Heat Excl	hange Element Materia	ı				Specially prod	cessed non-flammat	ole paper				
Air Filter						Multidir	ectional fibrous flee	ces				
T	уре	X.02					Sirocco fan					
		Ultra-High		250/250	500/500	650/650	800/800	1,000/1,000	1,500/1,500	2,000/2,000		
	Airflow Rate 50/60 Hz)	High	m³/h	250/250	500/500	650/650	800/800	1,000/1,000	1,500/1,500	2,000/2,000		
		Low		155/155	320/295	500/470	700/670	860/840	1,320/1,260	1,720/1,580		
Fan		Ultra-High		70/96	105/150	85/125	133/170	168/192	112/150	116/140		
	External Static Pressure (50/60 Hz) High		Pa	54.65	66/52	53/67	92/85	110/86	73/72	58/32		
,		Low		24/20	32/18	35/38	72/61	85/60	56/50	45/45		
٨	Motor Output		kW	0.030X2	0.090X2	0.140X2	0.2	80X2	0.2	80X4		
Connection	on Duct Diameter		mm	ø150	ø	200	ø	250	Ø	350		
Unit amb	ient condition					-15°C-	50°CDB, 8 0%RH or	less				

Sound level is measured at 1.5m below the centre of the body. Airflow rate can be changed over to Low mode or High mode.

- Sound level generally becomes greater than this value depending on the operating conditions, reflected sound

- Sound level generally becomes greater than this value depending on the operating conditions, reflected sound and peripheral noise.

 4. The sound level at the air discharge part is about 8 dB(A) higher than the unit's sound level.

 5. The specifications, designs and information given here are subject to change without notice.

 6. Temperature Exchange Efficiency is the mean value between cooling and heating.

 7. Efficiency is measured under the following conditions:

 Ratio of rated external static pressure has been maintained as follows; outdoor side to indoor side = 7 to 1.

 8. In conformance with JIS standards (JIS B 8628), operating sound level is based on the value when one unit is operated, with the value converted for an anechoic chamber.

 This is transmission sound from the main unit, and does not include sound from the discharge grille. Thus it is normal for the sound to be louder than the indicated value when the unit is octually installed.
- In a stransmission sound from the main ruint, and codes not include sound from the calcularge grille. Thus it is normal for the sound to be louder than the indicated value when the unit is octually installed.

 Sound level from the discharge port causes the value to be approximately 8 dB(A) (models with the airflow rate of less than 150 to 500m½/h) to approximately 11 dB(A) (models with the airflow rate of 650m½/h) for more) greater than the indicated value. Furthermore, fan rotation and noise from the discharge grille may increase depending on the on-site duct resistance conditions. Please consider noise countermeasures when installing the unit.
- 10. With large models in particular (1500 and 2000m²/h models), if the supply air (SA) grille is installed near the main unit, the noise of the main unit may be heard from the discharge grille via the duct, and this will result in a marked increase in noise. In such cases, if peripheral effects are included (such as reverberation of the floor and walls, combination with other equipment, and background noise), sound level may be as much as 15 dB(A) higher than the indicated value. When installing a large model, please provide as much separation as possible between the main unit and the discharge grille. If the equipment and discharge grille are near each other, please consider countermeasures such as the following:
 Use a cound-muffling boy flevible dust and countermeasures.

108


- such as the following:

 Use a sound-muffling box, flexible duct and sound-muffling air supply/discharge grilles
- Decentralised installation of discharge grilles
 When installing in a location with particularly low background noise such as a classroom, please consider the following measures to avoid transmission sound from the main unit:
- measures to avoid international room the main value.

 See of ceiling materials with high sound insulating properties (high transmission loss).

 Methods of blocking sound transmission, for example, by adding sound insulating materials around the bottom of the
- Alternatively, consider supplementary methods such as installing the equipment in a different location

Options

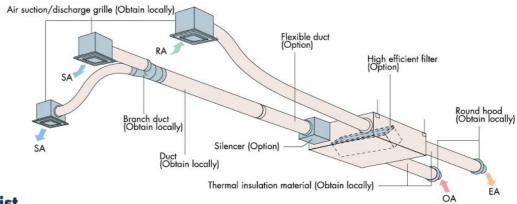

Option List

em			Туре				VAM 2	250 • 500	650 • 800	• 1000 • 1	500 • 200	0 GJVE			
1	Heat	Reclaim \	/entilator remote controller						BRC30	D1B61					
- [<u>.</u>	1. 1	Residential central remote controller		DC\$303A51 *1										
		ralised rolling	Central remote controller		DC\$302CA61										
	devic		Unified ON/OFF controller		DC\$301BA61										
			Schedule timer						DST30	1BA61					
Controlling device		Wiring ac	daptor for electrical		KRP2A61										
		For humic	lifier		KRP50-2										
	poddr	Installatio	n box for adaptor PCB		KRP50-2A90 (Mounted electric component assy of Heat Reclaim Ventilator)										
3	Ap/	For heate	r control kit		BRP4A50										
	PC Board Adaptor	For wiring	Type (indoor unit of VRV)	FXFQ-S FXFQ-LU	FXZQ-M	FXUQ-A	FXCQ-M	FXKQ-MA	FXDQ-PB FXDQ-NB	FXMQ-P	FXMQ-MA	FXHQ-MA	FXAQ-P	FXLQ-MA FXNQ-MA	FXVQ-A
			-	KRP1C63★	KRP1BA57★	KRP1C67	KRP1B61★	KRP1B61	KRP1B56★	KRP1C64★	KRP1B61	KRP1BA54	_	KRP1B61	KRP1C6
		Installatio	n box for adaptor PCB 🌣	Notes 2, 3 KRP1H98	Note 4, 6 KRP1BA101	-	Notes 2, 3 KRP1B96	-	Notes 4, 6 KRP1BA101	Notes 2, 3 KRP4A96	-	Note 3 KRP1CA93	Notes 2, 3 KRP4AA93	_	_


- Notes: 1. Installation box ≈ is necessary for each adaptor marked ★.
 2. Up to 2 adaptors can be fixed for each installation box.
 3. Only one installation box can be installed for each indoor unit.

 - 4. Up to 2 installation boxes can be installed for each indoor unit.
- 5. Installation box ★ is necessary for second adaptor.
 6. Installation box ★ is necessary for each adaptor.
 7. *1 For residential use only. When connected with a Heat Reclaim Ventilator (VAM), you can only switch the power ON/OFF. Cannot be used with other centralised control equipment.

İtem		Туре	VAM250GJVE	VAM500GJVE	VAM650GJVE	VAM800GJVE	VAM1000GJVE	VAM1500GJVE	VAM2000GJVE		
225	Silencer		(7 - 2)	KDDM24B50		KDDM24B100	KDDM24B100		4B100X2		
Additional		Nominal pipe diameter mm	-	ø	200						
	High efficience	y filter	KAF242J25M	KAF242J50M	KAF242J65M	KAF242J80M	KAF242J100M	KAF242J80MX2	KAF242J100MX2		
	Air filter for re	eplacement	KAF241J25M	KAF241J50M	KAF241J65M	KAF241J80M	KAF241J100M	KAF241J80MX2	KAF241J100MX2		
Flexible	duct (1 m)		K-FD\$151D	K-FDS	201D		K-FDS	251D			
Flexible	duct (2 m)		K-FDS152D	K-FDS	202D	K-FDS252D					
Duct ad	aptor	010 a a a							YDFA25A1		

PC board adaptor for heater control kit (BRP4A50)

When the installation of an electric heater is required in a cold region, this adaptor with an internal timer function eliminates the complicated timer connecting work that was necessary with conventional heaters.

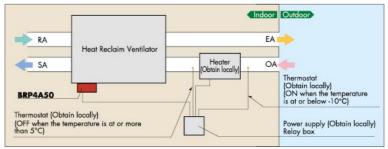

- Notes when installing
 Examine fully an installation place and specification for using the electric heater based on the standard and regulation of each
- Supply the electric heater and safety production devices such as a relay and a thermostat, etc. of which qualities satisfy the standard and regulation of each country at site.
- Use a non-inflammable connecting duct to the electric heater.
 Be sure to allow 2 m or more between the electric heater and the Heat Reclaim Ventilator for safety.
- For the Heat Reclaim Ventilator, use a different power supply from that of the electric heater and install a circuit breaker for